
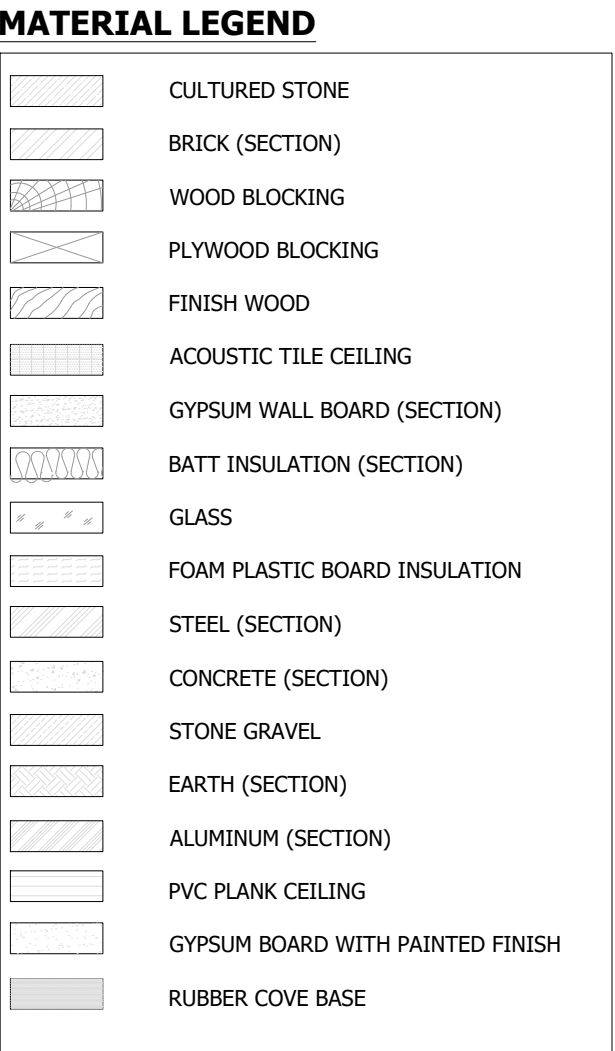


ABBREVIATIONS - (NOT ALL ABBREVIATIONS MIGHT BE USED IN THIS DOCUMENT)			
AFF	ABOVE FINISHED FLOOR	LT	LIGHT
ALUM	ALUMINUM	M	MULTI-COMPONENT
ANSI	AMERICAN NATIONAL STANDARDS INSTITUTE	MAT'L	MATERIAL, MATERIALS
ARCH	ARCHITECT, ARCHITECTURAL	MAX.	MAXIMUM
ARD	ABOVE REFERENCE DATUM	MECH	MECHANICAL
ATC	ACOUSTIC, ACOUSTICAL CEILING TILE	MET, MTL	METAL
BFB	BOTTOM FLANGE BRACING	MFR	MANUFACTURER
BLDG	BUILDING	MIN.	MINIMUM
BLK	BLOCK, BLOCKING	MISC	MISCELLANEOUS
BM	BEAM	NA	NOT APPLICABLE
BRD	BELOW REFERENCE DATUM	NAAMM	NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS
BTOS	BELOW TOP OF SLAB	NIC	NOT IN CONTRACT
CAB	CABINET	NO	NUMBER
CFMS	COLD-FORMED METAL STUDS	NT	NONTRAFFIC-USE
CFR	CODE OF FEDERAL REGULATIONS	NTS	NOT TO SCALE
CJ	CONSTRUCTION JOINT	OA	OVERALL
CLR	CLEAR, CLEARANCE	O.C.	ON CENTER
CLG	CEILING	OD	OUTSIDE DIAMETER
CMU	CONCRETE MASONRY UNIT	OH	OVERHEAD
COL	COLUMN	OSHA	OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION
COMB	COMBINATION	PERF	PERFORATED
CONC	CONCRETE	PLAM	PLASTIC LAMINATE
CONF	CONFERENCE	PLAS	PLASTER
CONST	CONSTRUCTION	PMANDE	PLUMBING, MECHANICAL AND ELECTRICAL
CONT	CONTINUOUS	PR	PAIR
CONTR	CONTRACTOR	PROJ	PROJECTED, PROJECTION
CT	CERAMIC TILE	PT	PAPER TOWEL DISPENSER OR DISPOSAL
CTR	CENTER	PTD	PAINTED
DA	DATUM	R	RISER
DBA	A-WEIGHTED DECIBELS DBL	RAD, R	RADIUS
DEMO	DEMOLITION	RB	RUBBER BASE
DF	DRINKING FOUNTAIN	REF	REFERENCE
DIA	DIAMETER	REINF	REINFORCED, REINFORCING
DIAG	DIAGONAL	REQ	REQUIRED
DIM	DIMENSION	REV	REVISION
DIV	DIVISION	RH	RIGHT HAND
DN	DOWN	RM	ROOM
DR	DOOR	RO	ROUGH OPENING
DTL	DETAIL	RXN	REACTION
DWG	DRAWING	S	SINGLE-COMPONENT
DWR	DRAWER	SC	SOLID CORE
EA	EACH	SCHED	SCHEDULE
EJ	EXPANSION JOINT	SD	SOAP DISPENSER
EL	ELEVATION	SDI	STEEL DOOR INSTITUTE
ELEC	ELECTRIC, ELECTRICAL	SH	SHELF, SHELVING
ELEV.	ELEVATION	SF	SQUARE FEET
EQ	EQUAL	SIM	SIMILAR
EWC	ELECTRIC WATER COOLER	SND	SANITARY NAPKIN DISPENSER
EX	EXISTING	SPEC	SPECIFICATION, SPECIFIED
EXP	EXPOSED	SQ	SQUARE
EXT	EXTERIOR	SR	SANITARY NAPKIN RECEPTACLE
FA	FIRE ALARM	SS	STAINLESS STEEL
FD	FLOOR DRAIN	STD	STANDARD
FE	FIRE EXTINGUISHER	STL	STEEL
FEC	FIRE EXTINGUISHER CABINET	STOR	STORAGE
FF	FINISHED FLOOR	STRUC	STRUCTURAL
FHC	FIRE HOSE CABINET	T	TREAD
FIN	FINISH, FINISHED	TANDG	TONGUE AND GROOVE
FL	FLOOR, FLOORING	TEL	TELEPHONE
FOS	FACE OF STUD	THK	THICK, THICKNESS
FR	FIRE RATED, FIRE RATING	TOP	TOP OF PARAPET
FUR	FURR, FURRING	TOW	TOP OF WALL
GA	GAUGE	TP	TOILET PAPER DISPENSER
GC	GENERAL CONTRACTOR	TYP.	TYPICAL
GWB	GYPSUM WALL BOARD	UC	UNDERCUT
HMMA	HOLLOW METAL MANUFACTURERS ASSOCIATION	UDO	UNIFIED DEVELOPMENT ORDINANCE
		UNO	UNLESS NOTED OTHERWISE
HORZ	HORIZONTAL	VERT	VERTICAL
HANDV	HORIZONTAL AND VERTICAL	VIF	VERIFY IN FIELD
HR	HOUR	VTR	VENT THROUGH ROOF
HZ	HETRZ	W/O	WITHOUT
ID	INSIDE DIAMETER	WC	WALL COVERING
INCL	INCLUDE, INCLUDED, INCLUDING	WRB	WATER RESISTIVE BARRIER
INSUL	INSULATE, INSULATED, INSULATION		
INT	INTERIOR		
JC	JANITORS CLOSET		
JT	JOINT		
KD	KNOCK DOWN		
KIT	KITCHEN		
LAM	LAMINATE		
LAV	LAVATORY		
LBL	LABEL		
LG	LONG, LENGTH		
LH	LEFT HAND		
LOD	LIMIT OF DISTURBANCE		

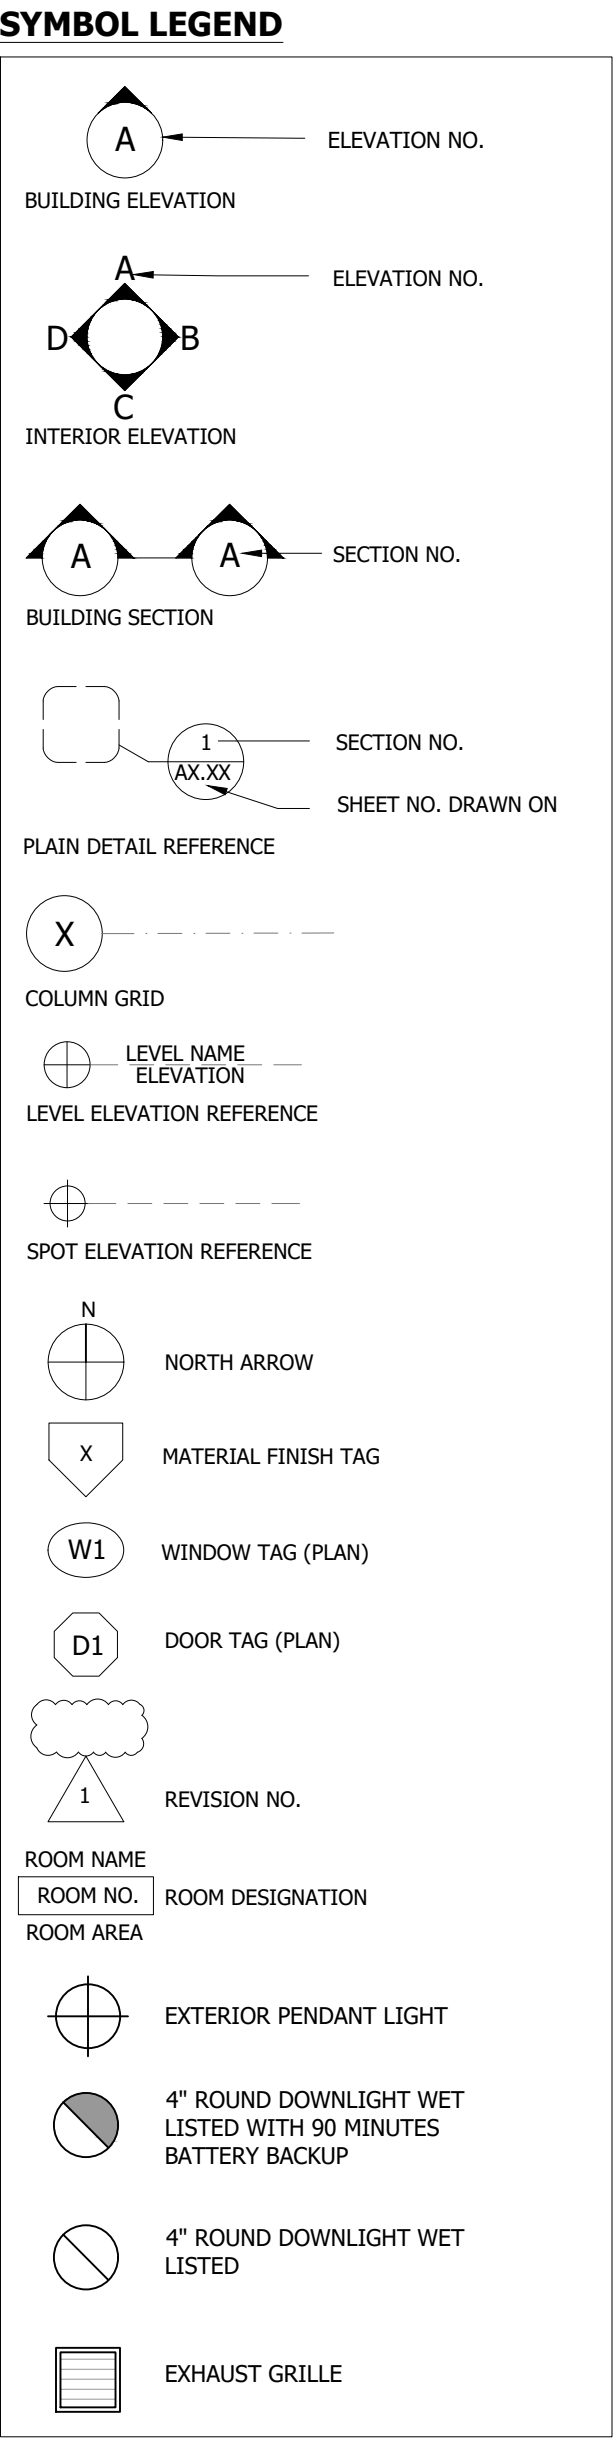

GENERAL NOTES

REGULATORY, PERMITTING AND SAFETY

- ALL WORK SHALL CONFORM TO THESE PLANS AND SPECIFICATIONS AS WELL AS:
 - LATEST REVISION OF THE CHATHAM COUNTY DESIGN STANDARDS AND SPECIFICATIONS.
 - LATEST REVISION OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION (NCDOT) STANDARDS AND SPECIFICATIONS.
 - THE 2018 NORTH CAROLINA BUILDING CODE AND OTHER APPLICABLE STATE CODES.
- CONTRACTOR MUST FAMILIARIZE THEMSELVES WITH THE PLANS, DETAILS, SPECIFICATIONS, AND SITE CONDITIONS PRIOR TO CONSTRUCTION. DISCREPANCIES MUST BE REPORTED TO THE DESIGN ENGINEER AND OWNER'S REPRESENTATIVE IMMEDIATELY.
- CONTRACTOR SHALL ABIDE BY ALL APPLICABLE GOVERNMENTAL AND REGULATORY STANDARDS AND REQUIREMENTS AND SHALL OBTAIN AND PAY FOR ALL NECESSARY PERMITS AND APPROVALS FOR CONSTRUCTION OF THE RESTROOM SHOWN IN THE DRAWINGS, EXCLUDING PERMITS OBTAINED BY THE OWNER. CONTRACTOR SHALL ALSO BE RESPONSIBLE FOR ARRANGING AND COORDINATING ALL REQUIRED INSPECTIONS BY REGULATORY AGENCIES INCLUDING PROVIDING ALL LABOR, EQUIPMENT AND MATERIALS NECESSARY TO ACCOMMODATE THE INSPECTIONS.
- CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR MAINTAINING GENERAL SAFETY AT AND ADJACENT TO THE PROJECT AREA INCLUDING PERSONAL SAFETY OF THE CONSTRUCTION CREW AND GENERAL PUBLIC, AND FOR THE SAFETY OF PUBLIC AND PRIVATE PROPERTY.
- CONTRACTOR SHALL BE RESPONSIBLE FOR SAFETY IN ACCORDANCE WITH OSHA STANDARDS 29 CFR PART 1926, SUBPART P.
- CONTRACTOR SHALL FOLLOW THE APPROVED EROSION CONTROL AND STORM MANAGEMENT PLAN FOR THE PROJECT.
- CONTRACTOR SHALL BE RESPONSIBLE FOR KEEPING ROADWAYS AND SIDEWALKS ADJACENT TO THE PROJECT FREE OF MUD, TRASH, AND CONSTRUCTION DEBRIS. CONTRACTOR SHALL CLEAN ROADWAY, SIDEWALKS, DRIVEWAYS, AND OTHER PAVED SURFACES THROUGHOUT THE DAY AND KEEP CLEAN FOR VEHICLES AND PEDESTRIANS.
- CONTRACTOR SHALL TAKE ALL NECESSARY SAFETY PRECAUTIONS TO PROTECT ABUTTING PROPERTY, UTILITIES, PEDESTRIANS AND VEHICULAR TRAFFIC.

GENERAL CONSTRUCTION

- CONTRACTOR SHALL VERIFY DIMENSIONS AND SITE CONDITIONS IN THE FIELD, AND REPORT ANY DISCREPANCY TO THE ENGINEER PRIOR TO COMMENCING WORK.
- CONTRACTOR SHALL FULLY ACQUAINT THEMSELVES WITH THE CONDITION OF CONTRACT AND LOCAL CONDITIONS RELATING TO LOCATION, ACCESSIBILITY, AND SCOPE OF WORK.
- CONTRACTOR SHALL VERIFY ALL ARCHITECTURAL AND CIVIL DIMENSIONS AND GRADES, LOOKING FOR ANY CONFLICTS OR OMISSIONS BETWEEN THE CONSTRUCTION DOCUMENTS AND FIELD CONDITIONS, BEFORE COMMENCING ANY WORK, AND REQUEST CLARIFICATION TO DESIGNATED ENGINEER.
- DIMENSIONS, NOTES, FINISHES, AND FIXTURES SHOWN ON TYPICAL PLANS, SECTIONS, OR DETAILS SHALL APPLY TO SIMILAR, SYMMETRICAL PLANS, SECTIONS OR DETAILS.
- DIMENSIONS ARE TO BE CLEAR FROM FACE OF FINISH MATERIAL TO FACE OF FINISH MATERIAL OR CENTERLINE OF FIXTURE AND ARE NOT ADJUSTABLE WITHOUT ENGINEER'S APPROVAL.
- CONTRACTOR SHALL PROVIDE SEALANT AROUND WINDOWS, DOOR JAMBS AND HEADS, AND ADJACENT CONSTRUCTION AS GOVERNED BY BUILDING CODE.
- ALL MATERIALS AND/OR EQUIPMENT SHALL BE INSTALLED/USED IN ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS AND/OR RECOMMENDATIONS.
- ELECTRICAL DEVICES (RECEPTACLES, SWITCHES, ETC.) SHALL NOT BE MOUNTED BACK TO BACK ON OPPOSITE SIDES OF PARTITIONS, UNLESS PROTECTED PER UL REQUIREMENTS. SWITCHES SHALL BE GANGED INTO ONE LOCATION, WHENEVER POSSIBLE, OR IN COMPLIANCE WITH GOVERNING CODE REQUIREMENTS.
- CONTRACTOR SHALL PROVIDE FIRE EXTINGUISHERS AS REQUIRED BY CODE AND LOCAL FIRE MARSHALL. CONTRACTOR SHALL REVIEW ESTABLISHED LOCATIONS WITH ENGINEER PRIOR TO BUILDING FRAMING COMMENCES.
- THESE DRAWINGS DO NOT CONTAIN THE REQUIREMENTS FOR JOB SAFETY. ALL PROVISIONS FOR SAFETY SHALL BE THE SOLE RESPONSIBILITY OF THE TRADE CONTRACTORS.
- CONTRACTOR SHALL MAINTAIN A CURRENT AND COMPLETE SET OF CONSTRUCTION DRAWINGS ON SITE DURING ALL PHASES OF CONSTRUCTION FOR USE BY ALL TRADES.
- CONTRACTOR SHALL SUBMIT SHOP DRAWINGS FOR THE ITEMS REQUIRED IN THE SPECIFICATIONS.
- ALL SHUTDOWNS MUST BE SCHEDULED WITH OWNER IN A WEEK ADVANCE.
- CONTRACTOR SHALL CONTACT THE ENGINEER'S OFFICE IMMEDIATELY UPON FINDING ANY DESIGN CONFLICTS DURING CONSTRUCTION ON ANY IMPROVEMENTS SHOWN ON THE DRAWINGS.
- CONTRACTOR SHALL PROVIDE ACCESS THROUGH OR AROUND THE SITE AT ALL TIME AND ENSURE THE SAFETY OF ALL THOSE PASSING THROUGH OR ADJACENT TO THE SITE.
- CONTRACTOR SHALL CONFINE ALL ACTIVITIES AT THE SITE ASSOCIATED WITH CONSTRUCTION ACTIVITIES, TO INCLUDE STORAGE OF EQUIPMENT AND OR MATERIALS, ACCESS TO THE WORK, FORMWORK, ETC. WITHIN THE DESIGNATED LIMITS OF LOD.
- CONTRACTOR SHALL BE RESPONSIBLE FOR STAKING OUT ALL CONSTRUCTION STAKES.
- ALL CONSTRUCTION AND MATERIALS SHALL BE IN ACCORDANCE WITH CHATHAM COUNTY STANDARD SPECIFICATIONS AND DETAILS.

UTILITY NOTES

- CONTRACTOR SHALL INSTALL WATER AND OTHER UTILITY SERVICES WITH NO LESS THAN 3-FT OF COVER TO SUBGRADE IN NON-TRAFFIC AREAS AND NO LESS THAN 4-FT OF COVER IN TRAFFIC AREAS, UNO IN DEVELOPMENT PLAN.
- CONTRACTOR SHALL VERIFY THE TYPE, SIZE, DEPTH, MATERIAL, AND LOCATION OF ALL UTILITIES AND THEIR TIE-IN LOCATIONS PRIOR TO BEGINNING THE CONSTRUCTION.
- CONTRACTOR SHALL COORDINATE AND SCHEDULE FOR TIE-IN/ HOOK UP OF ALL UTILITIES WITH TRADE CONTRACTORS AND UTILITY SERVICE COMPANIES INCLUDING BUT NOT LIMITED TO LIQUEFIED PETROLEUM GAS, WATER, ELECTRICITY, AND TELEPHONE.
- ALL UTILITY AND UTILITY TIE-IN WORK SHALL COMPLY WITH CHATHAM COUNTY SPECIFICATIONS AND STANDARDS.
- CONTRACTOR SHALL PROTECT ALL EXISTING UTILITY DURING CONSTRUCTION, AND REPAIRING ANY DAMAGES, CHARTED OR UNCHARTED, SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.
- CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING ALL EXISTING UTILITIES WITHIN THE CONSTRUCTION ZONE, BOTH HORIZONTALLY AND VERTICALLY, PRIOR TO BEGINNING ANY EXCAVATION.
- CONTRACTOR SHALL COMPLY WITH UTILITY CONSTRUCTION SPECIFICATION/ DETAILS PRESENTED IN THE APPROVED DEVELOPMENT PLAN SET DATED 09-05-2023 WITH LATEST REVISION ON 02-14-2024.

GRADING NOTES

- ALL FINISHED FLOOR ELEVATION SHALL BE 3" MIN. AND 1.5' MAX. ABOVE EXISTING GRADE. CONTRACTOR SHALL COORDINATE EXACT ELEVATION WITH THE ENGINEER AND SHALL COORDINATE ANY SUBSEQUENT RAMP OR STAIR CHANGES ACCORDINGLY.
- CONTRACTOR SHALL BACKFILL AROUND ALL NEW SIDEWALKS SUCH THAT THERE ARE NO TRIPPING HAZARDS.
- CONTRACTOR SHALL ADJUST/MOVE ALL EXISTING AND PROPOSED VAULTS, MANHOLES, STORM DRAIN STRUCTURES, CLEANOUTS, ETC. AS NEEDED TO MATCH FINISHED GRADE.
- CONTRACTOR SHALL COMPLY WITH GRADING DESIGN, SPECIFICATION, AND DETAILS PRESENTED IN THE APPROVED DEVELOPMENT PLAN SET DATED 09-05-2023 WITH LATEST REVISION ON 02-14-2024.
- CONTRACTOR SHALL COMPLY WITH EROSION CONTROL DESIGN, SPECIFICATION, AND DETAILS PRESENTED IN THE APPROVED DEVELOPMENT PLAN SET DATED 09-05-2023 WITH LATEST REVISION ON 02-14-2024.

SPECIAL NOTES AND DISCLAIMER

- CONTRACTOR MUST REVIEW PLANS PRIOR TO CONSTRUCTION. CONTRACTOR SHALL IMMEDIATELY CONTACT THE ENGINEER BEFORE PROCEEDING IF THE FOLLOWING CONDITIONS EXIST:
 - THE WORKING PLANS DO NOT BEAR THE ENGINEER'S SIGN AND SEAL.
 - THE PLANS ARE NOT COMPLETE.
 - THE PLANS CONTAIN DISCREPANCIES OR INCOMPLETE INFORMATION.
 - ANY ERRORS DUE TO FAILURE TO FOLLOW THE ABOVE PROCEDURES WILL EXEMPT THE ENGINEER'S RESPONSIBILITY.
 - CONTRACTOR BEARS THE RESPONSIBILITY TO ENSURE PROMPT DISTRIBUTION OF ANY REVISIONS ISSUED BY THE ENGINEER TO ALL SUBCONTRACTORS.

RESTROOMS
CAROLINA MURUGAN TEMPLE - PHASE 1

CLIENT: CAROLINA MURUGAN TEMPLE
100 MURUGAN CIR, MONCURE, NC 27559

DATE: 6/13/2025
SSN JOB ID: 1021-02-2024
DESIGNED BY: MK
DRAWN BY: BM
CHECKED BY: MK
REVIEWED BY: MN



#	REVISIONS	DATE



**ABBREVIATIONS, SYMBOLS AND
GENERAL NOTES**

PROJECT SPECIFICATIONS A. CONDITIONS OF THE CONTRACT I. GENERAL CONDITIONS 1. AMERICAN INSTITUTION OF ARCHITECTS (AIA) DOCUMENT A201, "GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION", 2017 EDITION, ARTICLES 1 THROUGH 15 INCLUSIVE IS MADE A PART OF THIS CONTRACT. REFERENCED CONDITIONS MAINTAIN FORCE AND EFFECT AS THOUGH SET FORTH IN FULL BAND SHALL APPLY TO ALL PORTION OF THE WORK. 2. THE TERM "CONTRACTOR" UNDER THIS CONTRACT SHALL REFER TO GENERAL CONTRACTOR (GC) AND ALL SUBCONTRACTORS ASSOCIATED WITH THIS PROJECT. II. SUPPLEMENTARY CONDITIONS 1. WHERE PROVISIONS OF GENERAL CONDITIONS RELATE TO PROJECT ADMINISTRATION AND WORK-RELATED REQUIREMENTS OF THE CONTRACT, THOSE PARAGRAPHS ARE EXPANDED IN GENERAL REQUIREMENTS. 2. GENERAL CONDITIONS, SUPPLEMENTARY CONDITIONS, AND GENERAL REQUIREMENTS CONTAIN INFORMATION NECESSARY FOR COMPLETION OF EVERY PART OF THIS PROJECT. B. GENERAL REQUIREMENTS I. SUMMARY OF WORK 1. WORK OF CONTRACT COMPRISES CONSTRUCTION OF RESTROOM BLOCK AS INDICATED IN CONTRACT DOCUMENTS. 2. TITLES AND HEADINGS IN CONTRACT DOCUMENTS ARE FOR THE CONVENIENCE AND ARE NOT TO BE TAKEN AS A SEGREGATION OF UNITS OF MATERIAL AND LABOR. 3. NO RESPONSIBILITY, DIRECT OR IMPLIED, IS ASSUMED BY ENGINEER OR OWNER FOR OMISSIONS OR DUPLICATIONS BY CONTRACTOR OR SUBCONTRACTORS DUE TO THE ARRANGEMENT OF MATTER IN CONTRACT DOCUMENTS. 4. CONTRACTORS SHALL USE PREMISES TO CONDUCT OPERATIONS TO ENSURE LEAST INCONVENIENCE OF GENERAL PUBLIC AND OTHER BUSINESSES. 5. LIMIT USE OF PREMISES FOR CONSTRUCTION AND STORAGE TO AREAS ALLOCATED BY THE OWNER. 6. ASSURE FULL RESPONSIBILITY FOR THE PROTECTION AND SAFEKEEPING OF PRODUCTS UNDER CONTRACT, INCLUDING THOSE STORED ON SITE. 7. CONTRACTOR SHALL BE RESPONSIBLE FOR CONTACTING AUTHORITY HAVING JURISDICTION (AHJ) DIRECTLY FOR NECESSARY INFORMATION, DECISIONS, AND INSPECTIONS BEARING UPON PERFORMANCE OF WORK. 8. REFERENCE STANDARDS: FOR PRODUCTS SPECIFIED BY ASSOCIATION OR TRADE STANDARDS, COMPLY WITH REQUIREMENTS OF REFERENCED STANDARD, EXCEPT WHEN MORE RIGID REQUIREMENTS ARE SPECIFIED OR REQUIRED BY APPLICABLE CODES. 9. CONTRACTORS SHALL CUT, FIT, AND PATCH AS REQUIRED TO COMPLETE WORK TO MATCH ADJACENT UNDISTURBED MATERIALS AND FINISHES AS PER INDUSTRY STANDARDS. II. ENVIRONMENTAL PROCEDURES 1. THE PROJECT SHALL REQUIRE MAXIMUM ENVIRONMENTALLY CONSCIOUS WORK FEASIBLE WITHIN PROJECT LIMITS, AVAILABLE MATERIALS, EQUIPMENT, AND PRODUCTS. 2. CONTRACTOR TO INFORM ENGINEER WHERE ENVIRONMENTAL REQUIREMENTS COULD DETRIMENTALLY IMPACT THE CRITICAL PATH OF CONSTRUCTION SCHEDULE. 3. CONTRACTOR TO ENSURE THAT THE PROJECT ACTIVITIES SHALL PROTECT ENVIRONMENT, BOTH ON-SITE AND OFF-SITE, DURING CONSTRUCTION OPERATIONS. 4. SPECIAL ENVIRONMENTAL DEFINITIONS: i. ENVIRONMENT POLLUTION AND DAMAGE: PRESENCE OF THE CHEMICAL, PHYSICAL, OR BIOLOGICAL AGENTS WHICH COULD: a. ADVERSELY EFFECT HUMAN HEALTH OR WELFARE. b. ADVERSELY IMPACT ENVIRONMENT AND/OR ECOLOGICAL BALANCE.		c. DEGRADE OR DAMAGE THE ENVIRONMENT FOR NATURAL AESTHETIC, CULTURAL OR HISTORICAL PURPOSES. ii. CLASS III LANDFILL: LANDFILL THAT ACCEPTS NON-HAZARDOUS WASTE SUCH AS HOUSEHOLD, COMMERCIAL, AND INDUSTRIAL WASTE, INCLUDING CONSTRUCTION, REMODELING, REPAIR, AND DEMOLITION OPERATIONS. iii. CONSTRUCTION AND DEMOLITION WASTE: SOLID WASTE SUCH AS BUILDING MATERIALS, PACKAGING, RUBBISH, DEBRIS, AND RUBBLE RESULTING FROM CONSTRUCTION, REMODELING, REPAIR, AND DEMOLITION OPERATIONS. iv. CHEMICAL WASTE: PETROLEUM PRODUCTS, BITUMINOUS MATERIALS, SALTS, ACIDS, ALKALOIDS, HERBICIDES, PESTICIDES, ORGANIC CHEMICAL, AND INORGANIC CHEMICAL WASTE AND CONSTRUCTION MATERIALS, SUCH AS ADHESIVE, SOLVENTS, AND PAINTS. 5. SPECIAL RECYCLING REQUIREMENTS: i. ARRANGE FOR COLLECTION BY OR DELIVERY TO APPROPRIATE RECYCLING CENTER OR TRANSFER STATION THAT ACCEPTS CONSTRUCTION AND DEMOLITION WASTE FOR PURPOSE OF RECYCLING. ii. PARTICIPATE IN RE-USE PROGRAMS: PARTICIPATE IN RE-USE PROGRAM TO EXTENT AVAILABLE IN PROJECT AREA. 6. COMPLY WITH FEDERAL, STATE, PROVINCIAL, AND LOCAL REGULATIONS INCLUDING, BUT NOT LIMITED TO, WATER, AIR, SOLID WASTE, HAZARDOUS WASTE, SANITARY WASTE, SEDIMENT, STORM WATER, DUST, HAZARDOUS MATERIALS AND NOISE POLLUTION. 7. PRESERVE NATURAL RESOURCES WITHIN THE PROJECT BOUNDARIES AND OUTSIDE LIMITS OF PERMANENT WORK PERFORMED UNDER CONTRACT IN EXISTING CONDITION OR RESTORE TO AN EQUIVALENT OR IMPROVED CONDITION UPON COMPLETION OF WORK. 8. PREVENT CREATION OF DUST, AIR POLLUTION AND ODORS. 9. PERFORM CONSTRUCTION OPERATIONS TO MINIMIZE NOISE. PERFORM NOISE PRODUCING WORK IN LESS SENSITIVE HOURS OF THE DAY OR WEEK AS DIRECTED BY OWNER. III. SUBMITTALS 1. SUBMITTALS ARE ONLY REQUIRED WHERE SPECIFICALLY INDICATED IN DRAWINGS OR REQUESTED FROM OWNER OR ENGINEER. 2. GENERAL CONTRACTOR SHALL REVIEW AND COORDINATE SUBMITTTALS PRIOR TO ENGINEER'S REVIEW. 3. GENERAL CONTRACTOR SHALL OBTAIN ENGINEER'S APPROVAL PRIOR TO FABRICATION OR INSTALLATION OF RELEVANT WORK. 4. CONTRACTOR, BY REVIEWING SUBMITTALS, TO INDICATE VERIFICATION OF COMPLIANCE WITH CONTRACT DOCUMENTS, FIELD MEASUREMENTS, FIELD CONSTRUCTION, CRITERIA, MATERIALS, AND SIMILAR DATA. 5. MARK EACH COPY OF PRODUCT DATA TO IDENTIFY APPLICABLE PRODUCTS, MODELS, OPTIONS, AND OTHER DATA; SUPPLEMENT MANUFACTURES' STANDARD DATA TO PROVIDE INFORMATION UNIQUE TO WORK. INCLUDE INSTALLATION INSTRUCTIONS. 6. PROVIDE SHOP DRAWINGS FOR CUSTOM FABRICATED ITEMS OR ITEMS LISTS ON THE CONTRACT DOCUMENTS. 7. PROVIDE MINIMUM TWO SAMPLES TO ENGINEER WITH THE FOLLOWING: i. INCLUDE PROJECT, SPECIFICATION AND LOCATION ON EACH SAMPLE, GIVING FULL INFORMATION. 8. SUBMIT CERTIFICATES TO ENGINEER, IN DUPLICATE, IN ACCORDANCE WITH REQUIREMENTS OF SPECIFICATIONS SECTION IV. QUALITY CONTROL 1. MAINTAIN QUALITY CONTROL OVER SUPPLIERS, MANUFACTURERS, PRODUCTS, SERVICES, SITE CONDITIONS, AND WORKMANSHIP, TO PRODUCE WORK AT THE SPECIFIED QUALITY. 2. WHEN SPECIFIED IN THE CONTRACT DOCUMENTS SECTIONS, REQUIRE MANUFACTURER OR SUPPLIER TO HAVE QUALIFIED PERSONNEL PROVIDE ON-SITE OBSERVATIONS AND RECOMMENDATIONS. 3. PROVIDE TESTING LABORATORY SERVICES REQUIRED BY LOCAL AUTHORITIES FOR CONFORMANCE TO APPLICABLE CODES.	4. DELIVER AND STORE ALL ITEMS IN PROTECTED AREAS. KEEP FREE OF ANY DAMAGE. REPLACE ANY DAMAGED ITEMS OR PARTS AT NO COST TO THE OWNER. 5. DELEGATED DESIGN SERVICES REQUIRE THE CONTRACTOR TO PROVIDE PRODUCTS AND SYSTEMS COMPLYING WITH PERFORMANCE AND DESIGN CRITERIA SPECIFIED IN THE CONTRACT DOCUMENTS. IF ADDITIONAL INFORMATION IS NEEDED, A WRITTEN REQUEST SHOULD BE SUBMITTED TO THE ENGINEER, WHILE A STATEMENT SIGNED AND SEALED BY THE RESPONSIBLE DESIGN PROFESSIONAL MUST BE PROVIDED, INDICATING COMPLIANCE WITH THE DESIGN CRITERIA AND INCLUDING CODES, LOADS, AND OTHER RELEVANT FACTORS. 6. SUBMIT COPIES OF PERMITS, LICENSES, CERTIFICATIONS, INSPECTION REPORTS, RELEASES, JURISDICTIONAL SETTLEMENTS, NOTICES, RECEIPTS FOR FEE PAYMENTS, JUDGMENTS, CORRESPONDENCE, RECORDS, AND SIMILAR DOCUMENTS TO THE OWNER FOR RECORDS, ESTABLISHING COMPLIANCE WITH STANDARDS AND REGULATIONS RELATED TO THE PERFORMANCE OF THE WORK. V. TEMPORARY FACILITIES AND CONTROLS 1. TEMPORARY FACILITIES SHALL COMPLY WITH ALL APPLICABLE CODES AND REGULATIONS, INCLUDING ELECTRIC SERVICE STANDARDS, TESTING AND INSPECTIONS, AND ACCESSIBLE TEMPORARY EGRESS REQUIREMENTS. 2. PROVIDE POWER SERVICES AND LIGHTING REQUIRED FOR OPERATIONS, WITH BRANCH WIRING AND DISTRIBUTION BOXES LOCATED TO ALLOW SERVICES AND LIGHTING BY MEANS OF CONSTRUCTION-TYPE POWER CORDS. 3. PROVIDE ENVIRONMENTALLY SAFE BARRIERS AS MAY BE REQUIRED TO PROTECT ADJACENT PROPERTIES FROM DAMAGE FROM OPERATIONS AND AS REQUIRED BY GOVERNING AUTHORITIES. 4. CONTROL ACCUMULATION OF WASTE MATERIALS AND RUBBISH; RECYCLE OR DISPOSE OF OFF-SITE AT INTERVALS APPROVED BY THE LANDLORD AND COMPLYING WITH SPECIAL ENVIRONMENTAL PROCEDURES SPECIFIED IN SECTION 01150. 5. OWNER WILL PAY FOR ELECTRIC AND WATER SERVICE USE CHARGES FOR CONSTRUCTION OPERATIONS, WHILE THE CONTRACTOR IS RESPONSIBLE FOR ALL OTHER TEMPORARY FACILITIES, INCLUDING INSTALLATION, REMOVAL, USE CHARGES, AND TELEPHONE COMMUNICATION LINES. 6. REMOVE AND CLEAN ALL TEMPORARY CONSTRUCTION FACILITIES, REPAIR ANY DAMAGE, WHICH WERE CAUSED BY PERFORMING THE WORK OF CONTRACT DOCUMENTS. VI. MATERIALS AND EQUIPMENT 1. PROVIDE MATERIALS AND SYSTEMS BY ONE MANUFACTURER TO EXTENT POSSIBLE. 2. INSTALL ITEMS PLUMB, LEVEL, AND SECURE AND INCORRECT RELATION TO ADJACENT PRODUCTS. SECURE PRODUCTS IN PLACE WITH POSITIVE ANCHORAGE DEVICES DESIGNED AND SIZED TO WITHSTAND STRESSES, VIBRATION AND RACKING. 3. TRANSPORT PRODUCTS BY METHODS TO AVOID DAMAGE, DELIVER UNDAMAGED IN MANUFACTURERS UNOPENED CONTAINERS OR PACKAGING. MANUFACTURERS ARE ENCOURAGED TO USE RECYCLABLE OR REUSABLE PACKAGING MATERIALS. 4. PROVIDE EQUIPMENT AND PERSONNEL TO HANDLE BY METHODS TO PREVENT SOILING DAMAGE. PROMPTLY INSPECT SHIPMENTS TO ASSURE PRODUCTS COMPLY WITH CONTRACT DOCUMENT REQUIREMENTS, QUANTITIES ARE CORRECT, AND PRODUCTS ARE UNDAMAGED. 5. STORE PRODUCTS IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS WITH SEALS AND LABELS INTACT AND LEGIBLE. INSPECT PERIODICALLY TO ASSURE PRODUCTS ARE UNDAMAGED AND ARE MAINTAINED UNDER REQUIRED CONDITIONS. 6. PROTECT PRODUCTS FROM DAMAGE BY COVERINGS AFTER INSTALLATION. VII. SUBSTITUTIONS 1. SUBSTITUTIONS REFER TO CHANGES IN PRODUCTS, MATERIALS, EQUIPMENT, AND CONSTRUCTION METHODS FROM THOSE SPECIFIED IN THE CONTRACT DOCUMENTS, WHICH CAN EITHER BE FOR CAUSE, DUE TO FACTORS LIKE PRODUCT UNAVAILABILITY OR REGULATORY CHANGES, OR FOR CONVENIENCE, WHERE THE CHANGES ARE NOT REQUIRED BUT MAY BENEFIT THE CONTRACTOR OR OWNER. 2. SUBSTITUTION REQUESTS WILL ONLY BE CONSIDERED IF THE SPECIFIED ITEM IS NOT AVAILABLE TO MEET THE PROJECT SCHEDULE OR	REQUIREMENTS. 3. PROVIDE MATERIALS, SYSTEMS AND EQUIPMENT SPECIFIED ON THE CONTRACT DOCUMENTS. FOR PRODUCTS SPECIFIED BY REFERENCE STANDARD, PROVIDE PRODUCT MEETING STANDARD. SUBMIT REQUESTS FOR SUBSTITUTIONS FOR PRODUCTS NOT SPECIFIED IN THE CONTRACT DOCUMENTS. 4. SUBMIT REQUESTS FOR SUBSTITUTIONS TO ENGINEER WITH MANUFACTURERS "CUT SHEET" IN WRITING AND GET APPROVAL OF ENGINEER IN WRITING. 5. INVESTIGATE PROPOSED SUBSTITUTIONS PRIOR TO SUBMITTAL TO OWNER. INCLUDE COST AND SCHEDULE CHANGES CAUSED BY SUBSTITUTIONS. SUBMIT SEPARATE REQUESTS FOR EACH PRODUCT. i. SUBSTITUTE PRODUCTS SHALL MEET OR EXCEED SPECIFICATION, PROVIDE THE SAME WARRANTY, AND WAIVE CLAIM FOR ADDITIONAL COSTS. ii. SUBSTITUTE PRODUCTS SHALL NOT BE ORDERED WITHOUT WRITTEN ACCEPTANCE OF ENGINEER AND/OR OWNER. iii. SUBSTITUTE PRODUCTS SHALL BE AT LEAST ENVIRONMENTALLY SOUND AS SPECIFIED PRODUCTS IN ALL EXPECT INCLUDING PRODUCT COMPOSITION, FIRE RATING, SMOKE DENSITY, AND OTHER ENVIRONMENTAL CONSIDERATIONS. iv. ENGINEER AND OWNER SHALL RESERVE RIGHTS FOR THE FINAL APPROVAL OF ACCEPTABILITY AND RESERVE RIGHT TO REJECT PROPOSALS DUE TO INSUFFICIENT INFORMATION. VIII. CONTRACT CLOSEOUT 1. CONTRACTOR SHALL PERFORM FINAL CLEANING IN COMPLIANCE WITH LOCAL LAWS, ENVIRONMENTAL REGULATIONS, AND MANUFACTURER'S INSTRUCTIONS, USING EXPERIENCED WORKERS OR PROFESSIONAL CLEANERS BEFORE REQUESTING FINAL INSPECTION. CONTRACTOR SHALL CLEAN ALL SURFACES, REMOVE DEBRIS, AND ENSURE THE PROJECT SITE IS CLEAR OF TOOLS, MATERIALS, AND WASTE BEFORE REQUESTING INSPECTION FOR CERTIFICATION OF SUBSTANTIAL COMPLETION. CONTRACTOR SHALL INCLUDE CLEANING OF EXTERIOR AND INTERIOR SURFACES, MECHANICAL AND ELECTRICAL EQUIPMENT, PLUMBING FIXTURES, AND AIR SYSTEM COMPONENTS TO RESTORE THE BUILDING TO A READY-FOR-OCCUPANCY CONDITION. 2. CONTRACTOR SHALL SUBMIT CERTIFICATION TO THE OWNER THAT THE WORK HAS BEEN INSPECTED AND HAS BEEN COMPLETED IN ACCORDANCE WITH CONTRACT DOCUMENTS AND DEFICIENCIES NOTED BY ENGINEER AND OWNER HAVE BEEN CORRECTED AT COMPLETION. 3. CONTRACTOR SHALL PERFORM FINAL CLEANING OF INTERIOR AND EXTERIOR SURFACES EXPOSED TO VIEW, REMOVING TEMPORARY LABELS, STAINS AND FOREIGN SUBSTANCES, POLISHING TRANSPARENT AND GLOSSY SURFACES, AND USING VACUUM CARPETED AND SOFT SURFACES. CONTRACTOR SHALL USE ONLY NON-TOXIC CLEANING MATERIALS. VINEGAR AND WATER SHALL BE USED FOR CLEANING GLASS. 4. CONTRACTOR TO KEEP PROJECT DOCUMENTS CURRENT. CONTRACTOR TO INDICATE ACTUAL WORK ON DRAWINGS; INDICATE ACTUAL PRODUCTS USED IN PROJECT MANUAL, INCLUDING MANUFACTURER, MODEL NUMBER AND OPTIONS. 5. CONTRACTOR TO PLACE ONE COMPLETE SET OF AS-BUILT DRAWINGS IN A PROTECTIVE PLASTIC TUBE PERMANENTLY SECURED TO THE WALL AS INDICATED ON DRAWINGS. CONTRACTOR TO DELIVER ONE COMPLETE SET OF AS-BUILT DRAWINGS TO OWNER AT COMPLETION OF PROJECT. 6. CONTRACTOR SHALL PROVIDE ALL APPLICABLE DATA RELATED TO MATERIAL, FINISH, AND MAINTENANCE TO OWNER. i. PROVIDE WRITTEN OPERATING INSTRUCTIONS AND MAINTENANCE PROCEDURE FOR EQUIPMENT INSTALLED UNDER EQUIPMENT, ELECTRICAL PLUMING, AIR CONDITIONING, HEATING AND VENTILATING SUBCONTRACTS. 7. CONTRACTOR SHALL PROVIDE WARRANTIES, TO OWNER AND REQUIRED BY CONTRACT DOCUMENTS AND WHERE PROVIDED BY MANUFACTURER FOR PRODUCTS SPECIFIED. i. PROVIDE DUPLICATE COPIES ON CONTRACTOR LETTERHEAD, COUNTERSIGNED BY SUBCONTRACTOR AND INSTALLER. ii. REJECTION OF WARRANTIES: OWNER RESERVES THE RIGHT TO REJECT UNSOLICITED AND COINCIDENTAL PRODUCT WARRANTIES WHICH DETRACT FROM OR CONFUSE INTERPRETATIONS OF CONTRACT DOCUMENTS. 8. PRIOR TO FINAL INSPECTION, CONTRACTOR SHALL DEMONSTRATE OPERATION OF EACH SYSTEM TO OWNER. C. CONCRETE 1. CAST-IN-PLACE CONCRETE - SEE STRUCTURAL DRAWINGS	D. MASONRY AND MASONRY ASSEMBLIES I. SUBMITTALS 1. SUBMIT FACE BRICK, SPECIAL BRICK SHAPES, AND ARCHITECTURAL BLOCK SAMPLES TO THE CLIENT FOR COLOR AND TYPE VERIFICATION. 2. SUBMIT MIX DESIGNS REPORT FOR EACH TYPE MORTAR AND GROUT. THE REPORT SHALL INCLUDE TEST REPORTS, PER ASTM C 780 FOR MORTAR MIXES REQUIRED AND PER ASTM C 1019 FOR GROUT MIXES REQUIRED. 3. REVIEW FLASHING, WEEP HOLES, CAVITY DRAINAGE, AND CONDITION OF OTHER CONSTRUCTION THAT WILL AFFECT DECORATIVE VENEER WALL PERFORMANCE. II. PRODUCT 1. ALL MANUFACTURER, PRODUCT TYPES, COLORS ARE NOTED ON THE EXTERIOR FINISH SCHEDULE OF THE CONSTRUCTION DOCUMENTS. 2. MORTAR SHALL BE TYPE S MORTAR AND COLOR TO BE PER THE EXTERIOR FINISH SCHEDULE OF THE CONSTRUCTION DOCUMENTS. 3. REFER STRUCTURAL DRAWING FOR REINFORCEMENT SPECIFICATION. 4. EMBEDDED FLASHING MATERIALS SHALL BE ASPHALT-COATED COPPER FLASHING: 5-OZ./SQ. FT. (1.5-KG/SQ. M) COPPER SHEET COATED WITH FLEXIBLE ASPHALT. USE ONLY WHERE FLASHING IS FULLY CONCEALED IN MASONRY. 5. REFER INSULATION SPECIFICATION FOR WALL INSULATION / SHEATHING. III. APPLICATION 1. USE MASONRY CLEANER TO REMOVE MORTAR/GROUT STAINS AND EFFLORESCENCE WITHOUT DISCOLORING OR DAMAGING MASONRY SURFACES. THE MASONRY CLEANERS SHALL BE PROPRIETARY ACIDIC CLEANER AS RECOMMENDED BY THE MANUFACTURER. 2. PROVIDE CONTROL AND EXPANSION JOINTS AS PER INDUSTRY STANDARD AND AS RECOMMENDED BY MASONRY MANUFACTURER. INSTALL CONTROL AND EXPANSION JOINT MATERIALS IN UNIT MASONRY AS MASONRY PROGRESSES. DO NOT ALLOW MATERIALS TO SPAN CONTROL AND EXPANSION JOINTS WITHOUT PROVISION TO ALLOW FOR IN-PLANE WALL OR PARTITION MOVEMENT. E. METAL FABRICATIONS I. STRUCTURAL STEEL FRAMING - SEE STRUCTURAL DRAWINGS II. STEEL JOIST FRAMING - SEE STRUCTURAL DRAWINGS III. STEEL DECKING - SEE STRUCTURAL DRAWINGS IV. COLD FORMED STRUCT MTL FRAMING - SEE STRUCTURAL DRAWINGS V. MTL FABRICATIONS/ CONNECTIONS - SEE STRUCTURAL DRAWINGS F. WOOD, PLASTICS, AND COMPOSITES I. ROUGH AND FINISH CARPENTRY 1. FURNISH AND INSTALL ROUGH AND FINISH CARPENTRY AND MILLWORK AS REQUIRED, INCLUDING BUT NOT LIMITED TO ROUGH CARPENTRY, FURRING, BLOCKING, ROUGH FRAMES, WOOD CURBS, NAILERS, BACKING, FIXTURE FRAMING, EQUIPMENT SUPPORTS, HARDWARE, ETC. 2. FINISH CARPENTRY TO INCLUDE INSTALLATION OF ALL FIXTURES AND ALL ASSOCIATED TRIM AND HARDWARE. 3. PROVIDE BLOCKING IN WALLS AT ALL LOCATIONS THAT REQUIRE ADDITIONAL WALL SUPPORT INCLUDING BUT NOT LIMITED TO FIRE EXTINGUISHERS, GRAB BARS, MIRRORS, LAVATORIES, TOILET ACCESSORIES, BENCHES, ETC.
---	--	--	--	--	---

RESTROOMS	DATE: 6/13/2025		#	REVISIONS	DATE	SPECIFICATIONS	G - 301
	SSN JOB ID: 1021-02-2024						
CAROLINA MURUGAN TEMPLE - PHASE 1	DESIGNED BY: MK						
CLIENT: CAROLINA MURUGAN TEMPLE 100 MURUGAN CIR, MONCURE, NC 27559	DRAWN BY: BM						
	CHECKED BY: MK						
	REVIEWED BY: MN						

2. THE CONTRACTOR SHALL EXAMINE THE AREAS AND CONDITIONS UNDER WHICH WORK OF THE SECTION WILL BE PROVIDED, SHALL CORRECT CONDITIONS DETRIMENTAL TO THE TIMELY AND PROPER COMPLETION OF THE WORK, AND SHALL NOT PROCEED UNTIL UNSATISFACTORY CONDITIONS ARE CORRECTED.PROVIDE METAL FRAMING INSTALLATION TOLERANCE OF 1:2000 HORIZONTALLY AND 1:360 VERTICALLY. 3. PROVIDE CONTROL JOINT SPACING IN ACCORDANCE WITH CURRENT GYPSUM ASSOCIATION STANDARDS OR AS FOLLOWS FOR GYPSUM CONSTRUCTION. 4. PROVIDE A GYPSUM ASSOCIATION LEVEL 4 GYPSUM BOARD FINISH. ALL JOINTS AND INTERIOR ANGLES SHALL HAVE TAPE EMBEDDED IN JOINT COMPOUND AND TWO SEPARATE COATS OF JOINT COMPOUND APPLIED OVER ALL JOINTS, ANGLES, FASTENER HEADS AND ACCESSORIES. ALL JOINT COMPOUND SHALL BE SMOOTH AND FREE OF TOOL MARKS AND RIDGES.		J. EQUIPMENT (NOT USED) K. FURNISHINGS (NOT USED) L. SPECIAL CONSTRUCTION (NOT USED) M. CONVEYING SYSTEM (NOT USED) N. MECHANICAL (SEE MECHANICAL DRAWINGS) O. ELECTRICAL (SEE ELECTRICAL DRAWINGS) P. PLUMBING (SEE ELECTRICAL DRAWINGS) Q. SITE CONSTRUCTION	
--	--	--	--

RESTROOMS	DATE: 6/13/2025			#	REVISIONS	DATE	SPECIFICATIONS	G - 303
	SSN JOB ID: 1021-02-2024							
CLIENT: CAROLINA MURUGAN TEMPLE 100 MURUGAN CIR, MONCURE, NC 27559	DESIGNED BY: MK							
	DRAWN BY: BM							
	CHECKED BY: MK							
	REVIEWED BY: MN							

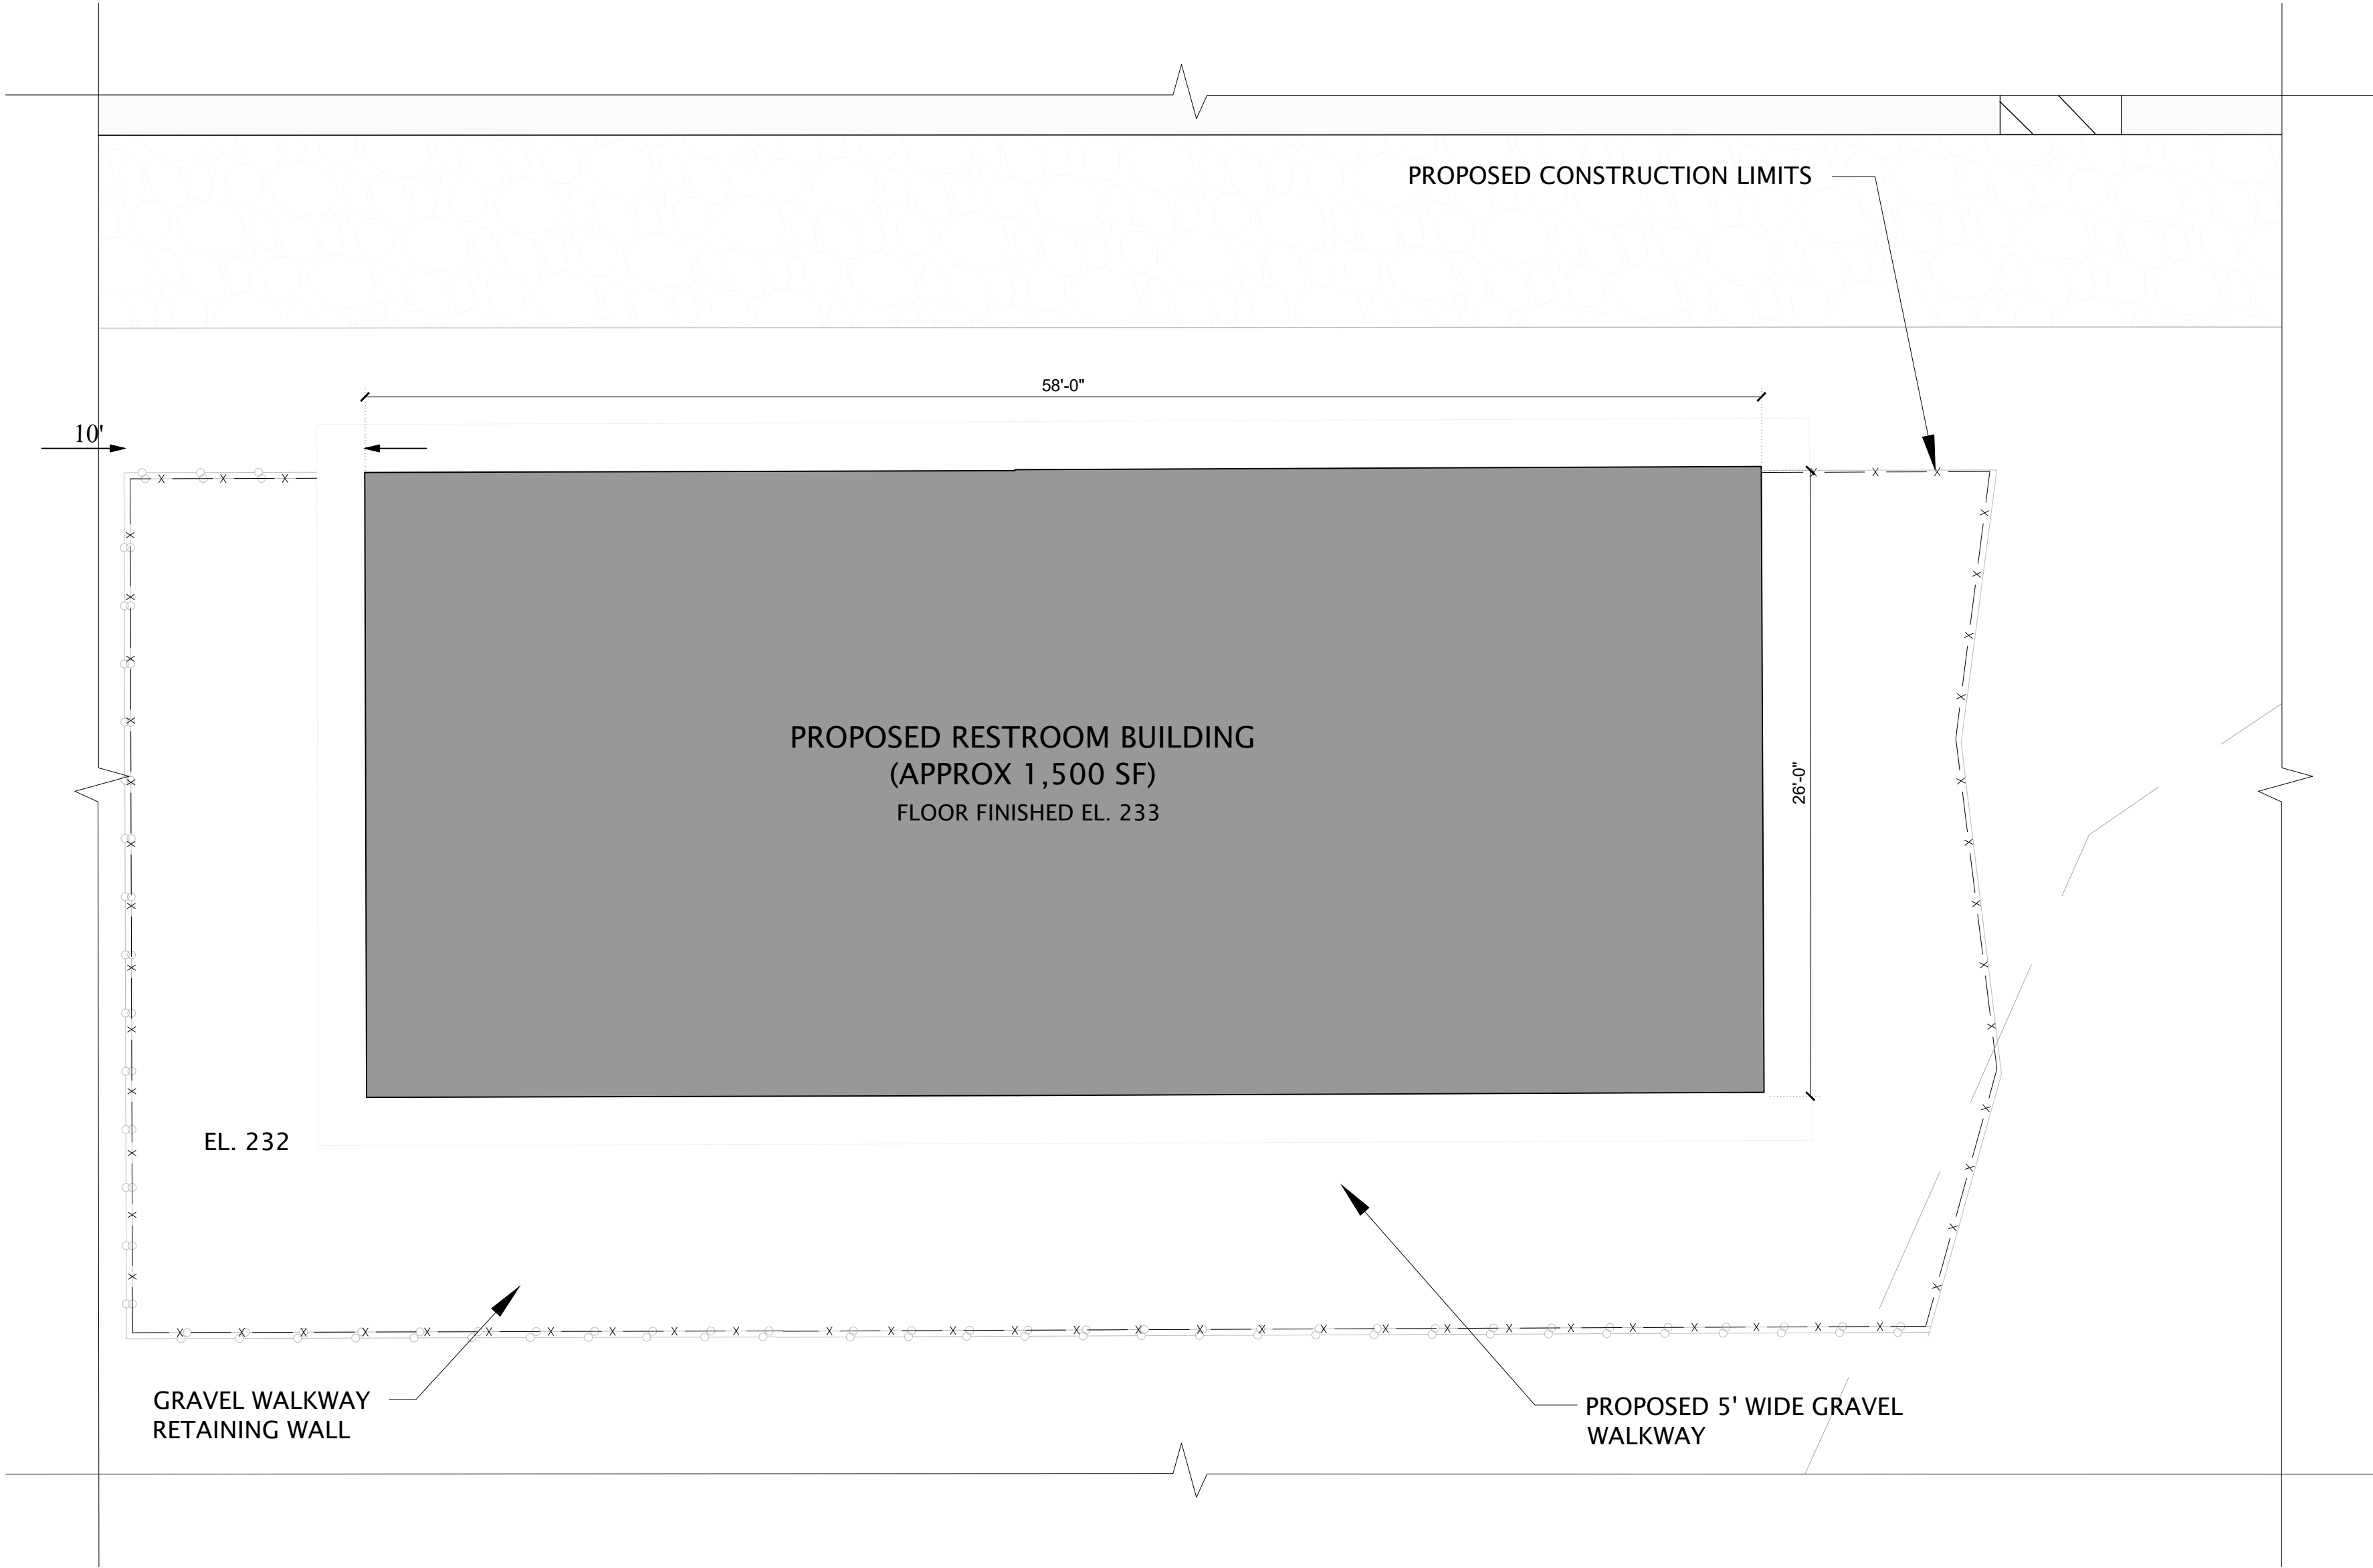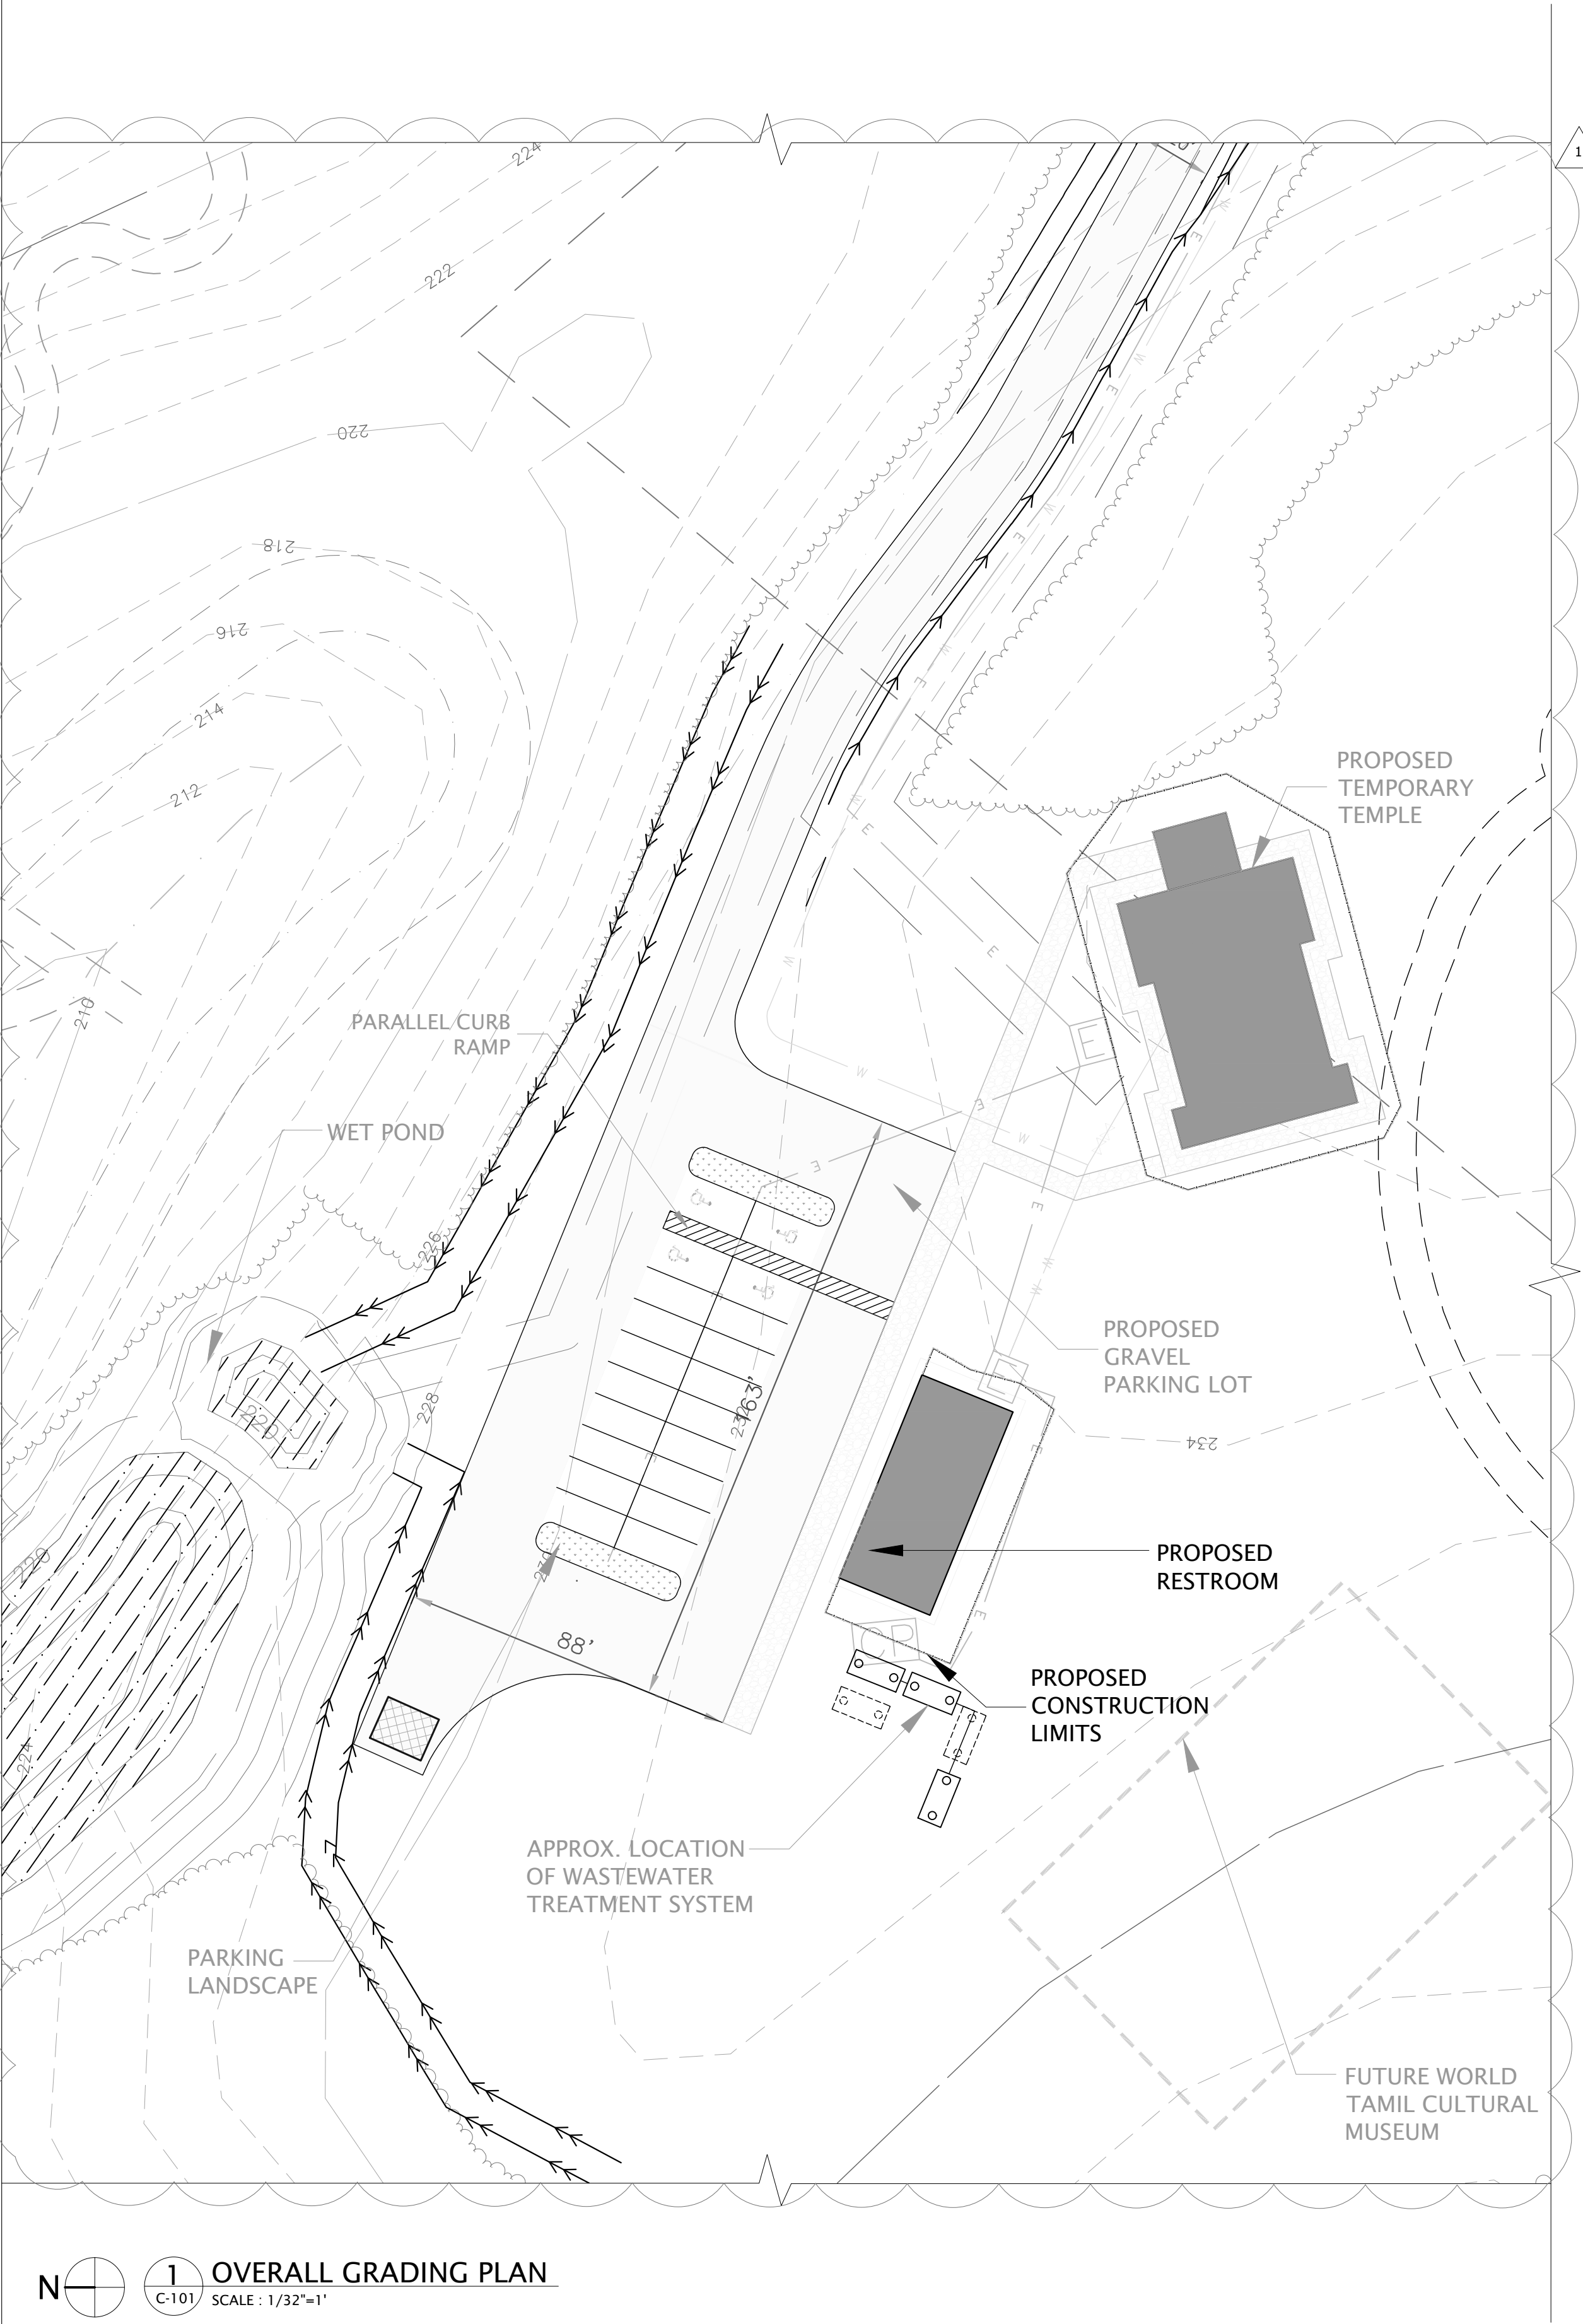

- GRADING PLAN NOTES**
1. THE TOPOGRAPHIC FEATURES SHOWN ARE BASED ON A PLAN BY MACCONNELL AND ASSOCIATES, P.C. OF CARY, NORTH CAROLINA. CONTRACTORS MUST VERIFY THESE FEATURES AND PROTECT EXISTING STRUCTURES/UTILITIES.
 2. CONTRACTORS MUST COORDINATE WITH UTILITY COMPANIES TO VERIFY SERVICE POINTS, LOCATIONS, AND DEPTHS OF ALL UTILITIES.
 3. NOTIFY NC 811 AT LEAST 72 HOURS BEFORE EXCAVATION TO VERIFY UNDERGROUND UTILITY LOCATIONS.
 4. COMPLY WITH ALL APPLICABLE SAFETY LAWS AS GUIDED BY OSHA REGULATIONS.
 5. REPAIR OR REPLACE ANY DAMAGED SITE FEATURES, SUCH AS CURBS, GUTTERS, SIDEWALKS, AND SURVEY MONUMENTS.
 6. THE CONTRACTOR ASSUMES RESPONSIBILITY FOR SITE SAFETY AND HOLDS HARMLESS THE OWNER, ENGINEER, AND CONSULTANTS AGAINST CLAIMS, EXCEPT THOSE ARISING FROM THEIR SOLE NEGLIGENCE.
 7. CONTRACTORS ARE RESPONSIBLE FOR LAWFUL DISPOSAL OF ALL REMOVED MATERIALS, INCLUDING DEBRIS, EXCESS SOIL, AND TREE STUMPS.
 8. IF CULTURAL OR ARCHAEOLOGICAL RESOURCES ARE UNCOVERED DURING CONSTRUCTION, HALT WORK AND CONTACT A QUALIFIED ARCHAEOLOGIST IMMEDIATELY.
 9. PLAN REVISIONS MUST BE APPROVED BY THE ENGINEER AND OWNER AND ACCURATELY REFLECTED ON RECORD DRAWINGS. UNAUTHORIZED CHANGES ARE THE CONTRACTOR'S RISK.
 10. MAINTAIN CLEANLINESS ON THE SITE AND REMOVE DIRT OR DEBRIS FROM PUBLIC AREAS PROMPTLY.
 11. IMPLEMENT DUST CONTROL MEASURES, INCLUDING WATERING, COVERING STOCKPILES, AND PROMPTLY LANDSCAPING DISTURBED AREAS.
 12. SUBMIT FIELD REPORTS, COMPACTION TESTS, AND FINAL GRADING REPORTS TO THE JURISDICTIONAL AUTHORITY (JA) AT INSPECTIONS.

- GRADING AND DRAINAGE EROSION CONTROL NOTES**
1. CONTRACTOR SHALL CONSTRUCT DIVERSION DITCHES AS NECESSARY TO ENSURE ALL SEDIMENT IS DIRECTED IN ACCORDANCE WITH EROSION CONTROL PLAN.
 2. NOTIFY THE AHJ 48 HOURS BEFORE STARTING GRADING OPERATIONS.
 3. GRADING MUST COMPLY WITH AHJ GRADING AND EROSION CONTROL ORDINANCES.
 4. PREPARE SUBGRADE TO RECEIVE FILLS, REMOVING UNSATISFACTORY MATERIALS AND COMPACTING FILL AS REQUIRED.
 5. OVER-EXCAVATE AND BACKFILL UNSTABLE OR UNSUITABLE AREAS WITH SELECT MATERIAL.
 6. MAXIMUM CUT AND FILL SLOPE SHALL BE 2:1 (HORIZONTAL TO VERTICAL).
 7. ROUND CUT SLOPES TO BLEND WITH EXISTING GRADES AND PLANT WITH SUITABLE GROUND COVER.
 8. REMOVE TREE STUMPS AND ROOTS LARGER THAN 1/2 INCH, BACKFILL CAVITIES, AND COMPACT THE FILL.
 9. PROTECT EXISTING UNDERGROUND UTILITIES DURING GRADING.

LEGENDS

	ASPHALTIC PAVEMENT
	GRAVEL SIDEWALK
	DITCH
	DIVERSION BERM
	PR. TREELINE
	EX. CONTOUR INDEX
	EX. CONTOUR INTERMEDIATE
	LINE OF DISTURBANCE
	SILT FENCE LINE
	PR. BUILDING

RESTROOM
CAROLINA MURUGAN TEMPLE - PHASE 1

CLIENT: CAROLINA MURUGAN TEMPLE
100 MURUGAN CIR, MONCURE, NC 27559


DATE: 6/13/2025
SSN JOB ID: 1021-02-2024
DESIGNED BY: MK
DRAWN BY: MS
CHECKED BY: MK
REVIEWED BY: MN

SSN ENGINEERS
SSN ENGINEERS, PLLC
212 HENSLEY HILL PL., HOLLY SPRINGS, NC 27540
PHONE: 919-579-1490 INFO@SSNBUILDERS.COM FIRM LICENSE # P-2998

#	REVISIONS	DATE
1	REV-1	5/30/2025


RESTROOM SITE PLAN WITH GRADING

C - 101

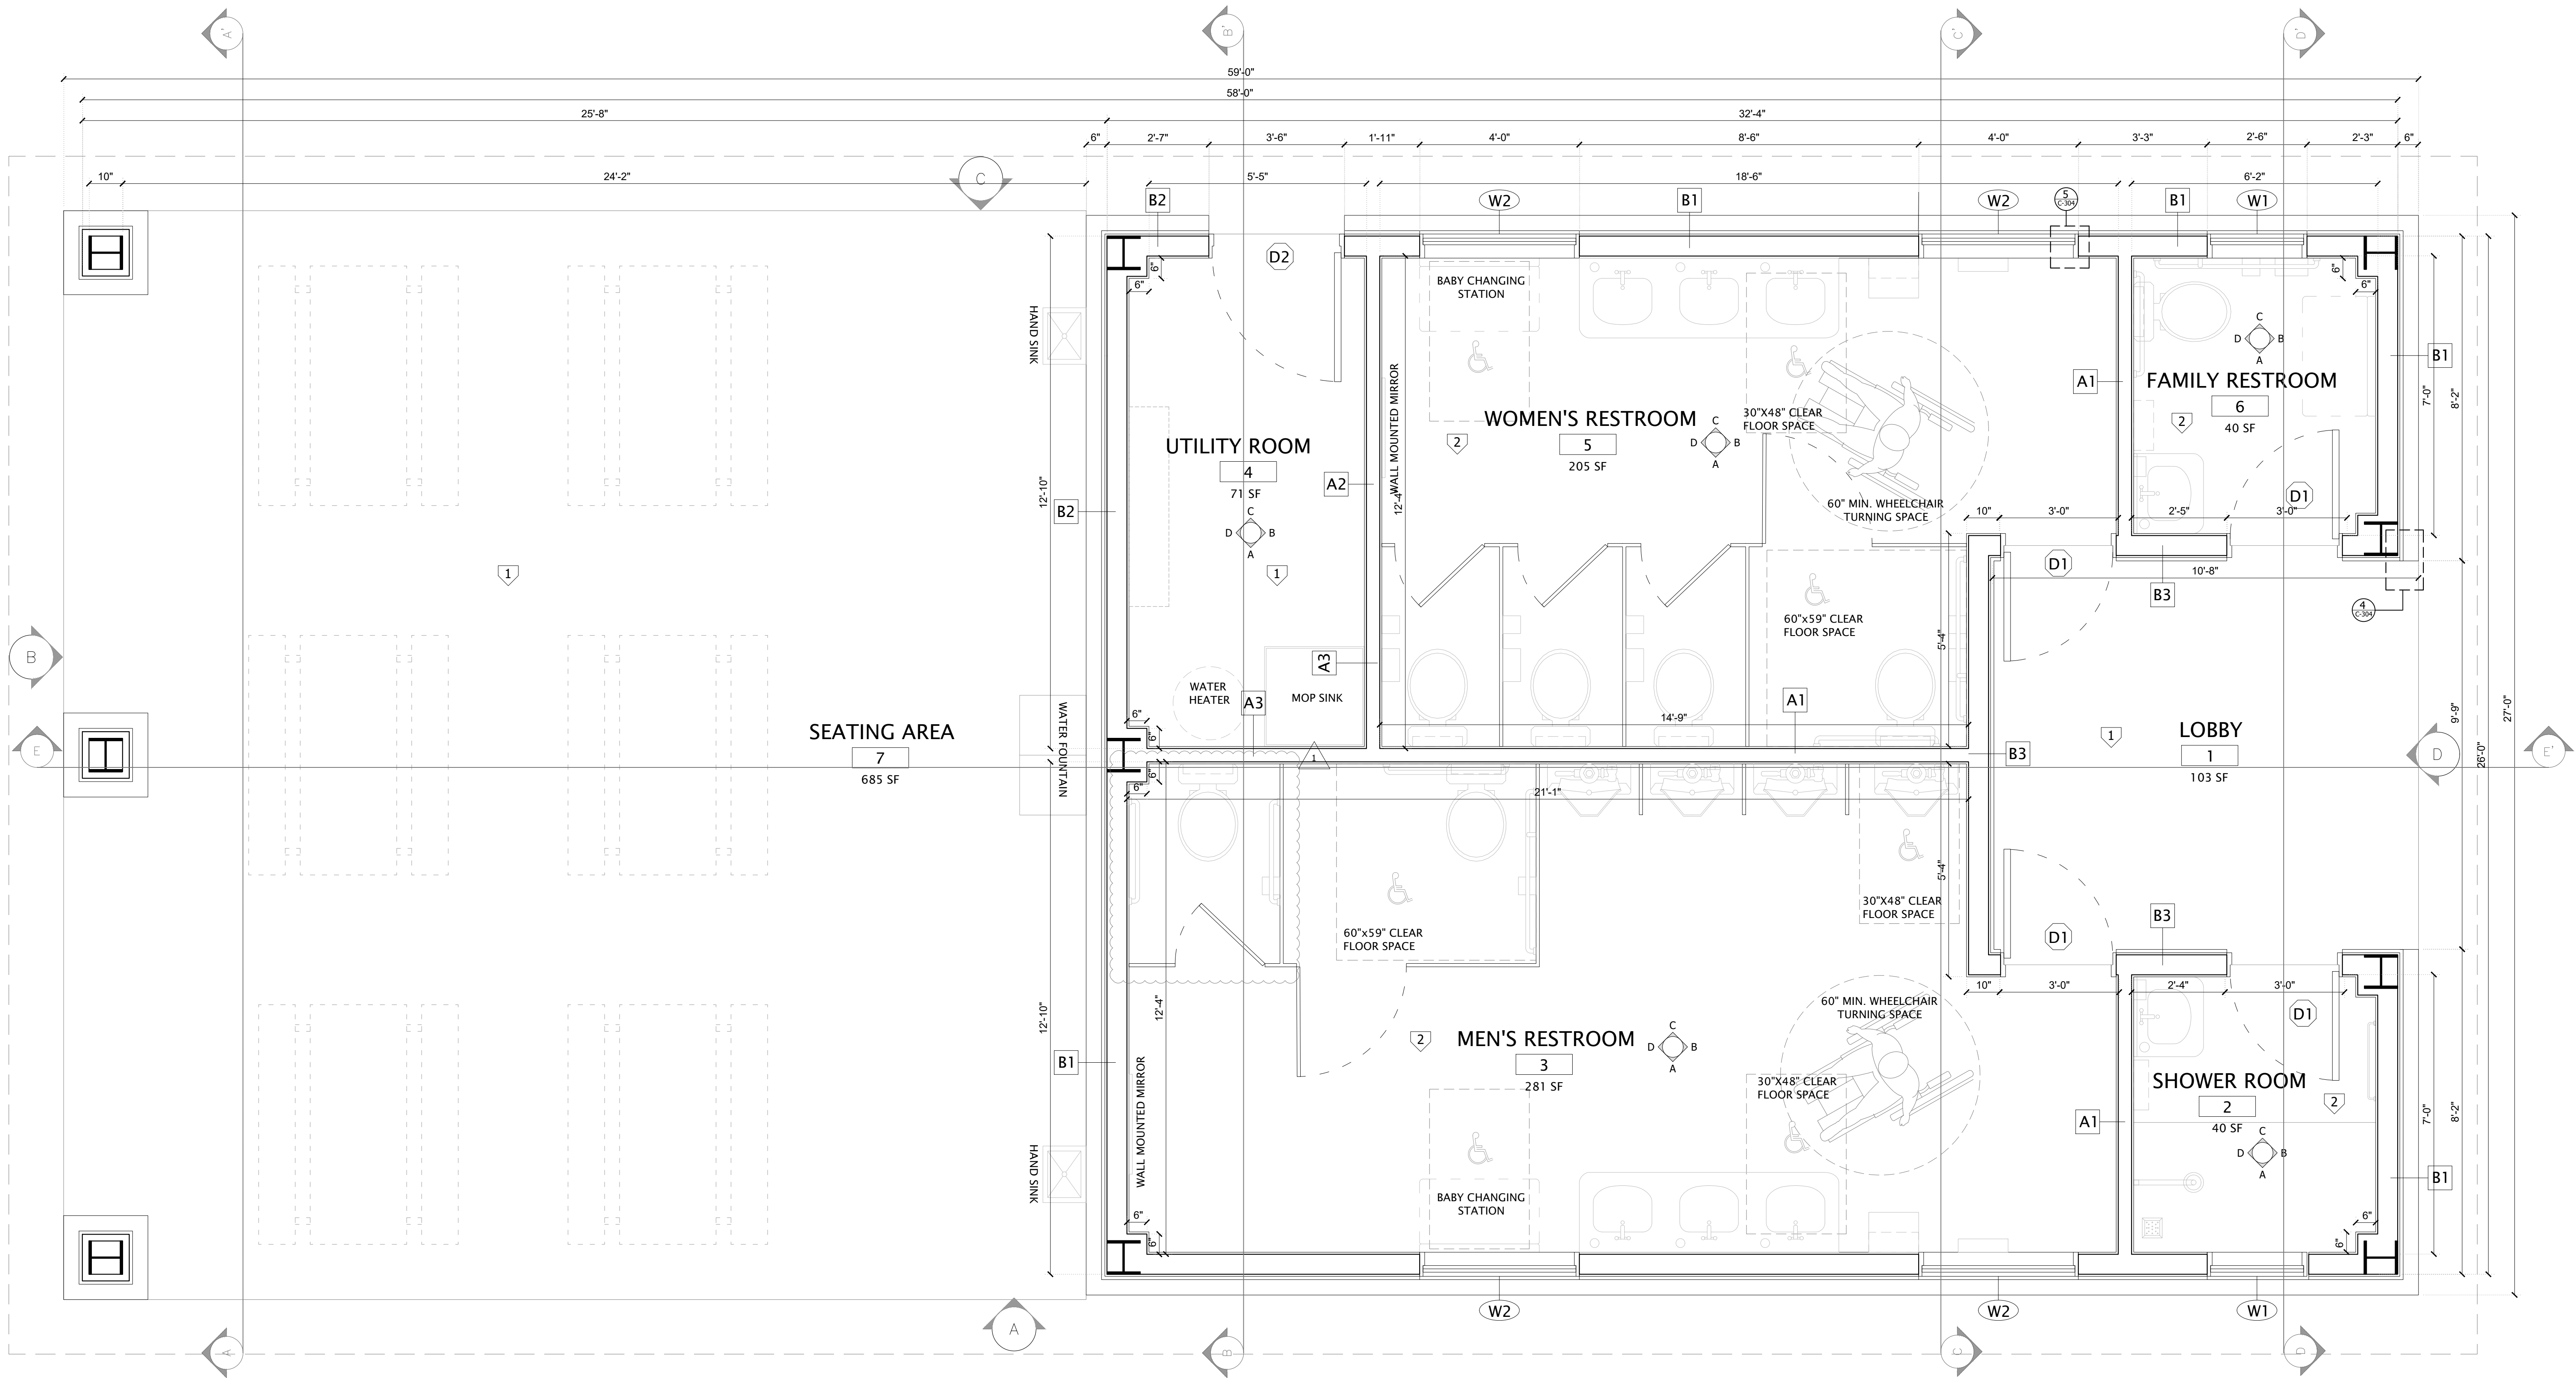

1 FLOOR PLAN
C-201 SCALE: 1/2" = 1'-0"

- KEY NOTES**
- FLOOR FINISHES
- 1 LIGHT GREY SEALED CONCRETE FLOORING OR APPROVED EQUAL
- 2 TRAFFICMASTER BAJA GRAY 12"x12" MATTE CERAMIC FLOOR TILE OR APPROVED EQUAL
- 3 FINE FISSURED - IVORY 24" X 48" MOISTURE RESISTANT CEILING TILE OR APPROVED EQUAL
- FLOOR PLAN AND FINISHES NOTES**
- A. REFER SHEET G-103 FOR SYMBOLS AND ABBREVIATIONS.
- B. REFER SHEET G-104 FOR ACCESSIBILITY REQUIREMENTS.
- C. REFER SHEET C-301 FOR ROOM FINISH SCHEDULE, SHEET C-302 FOR DOOR AND WINDOW SCHEDULE AND SHEET C-303 FOR PARTITION TYPES.
- D. REFER SHEET C-210 FOR INTERIOR ELEVATIONS.
- E. STUD SPACING TO BE AT 16" O.C. TYP. UNO.
- F. PROVIDE CONTROL JOINTS IN THE PARTITIONS LONGER THAN 30 FEET FOR STRAIGHT AND CONTINUOUS WALLS AND AT OPENING LOCATIONS. WHERE NOT SPECIFICALLY INDICATED, GC TO SUBMIT PROPOSED CONTROL JOINT LOCATIONS TO ENGINEER FOR APPROVAL.
- G. ALL RESTROOM WALLS TO HAVE CEMENTITIOUS BACKER BOARD TO 72" AFF AND WATER RESISTANT GYPSUM BOARD ABOVE, UNO.
- H. SHOWER ROOM WALLS TO HAVE CEMENTITIOUS BACKER BOARD UPTO 96" AFF AND WATER RESISTANT GYPSUM BOARD ABOVE, UNO.
- I. FLOOR FINISH CHANGES BETWEEN ROOMS OCCUR AT DOOR CENTERLINES, TYP.
- J. ALL DIMENSIONS ARE TO FINISH MATERIALS OR OPENINGS UNO, EXCEPT CERAMIC TILE.

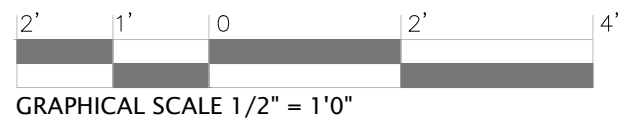

RESTROOMS
CAROLINA MURUGAN TEMPLE - PHASE 1
CLIENT: CAROLINA MURUGAN TEMPLE
100 MURUGAN CIR, MONCURE, NC 27559


DATE: 6/13/2025
SSN JOB ID: 1021-02-2024
DESIGNED BY: MK
DRAWN BY: BM
CHECKED BY: MK
REVIEWED BY: MN



#	REVISIONS	DATE
1	REV-1	6/11/2025
2	NORTH SIGN UPDATED AS PER COUNTY'S REVIEW.	5/30/2025


FLOOR PLAN

C - 201

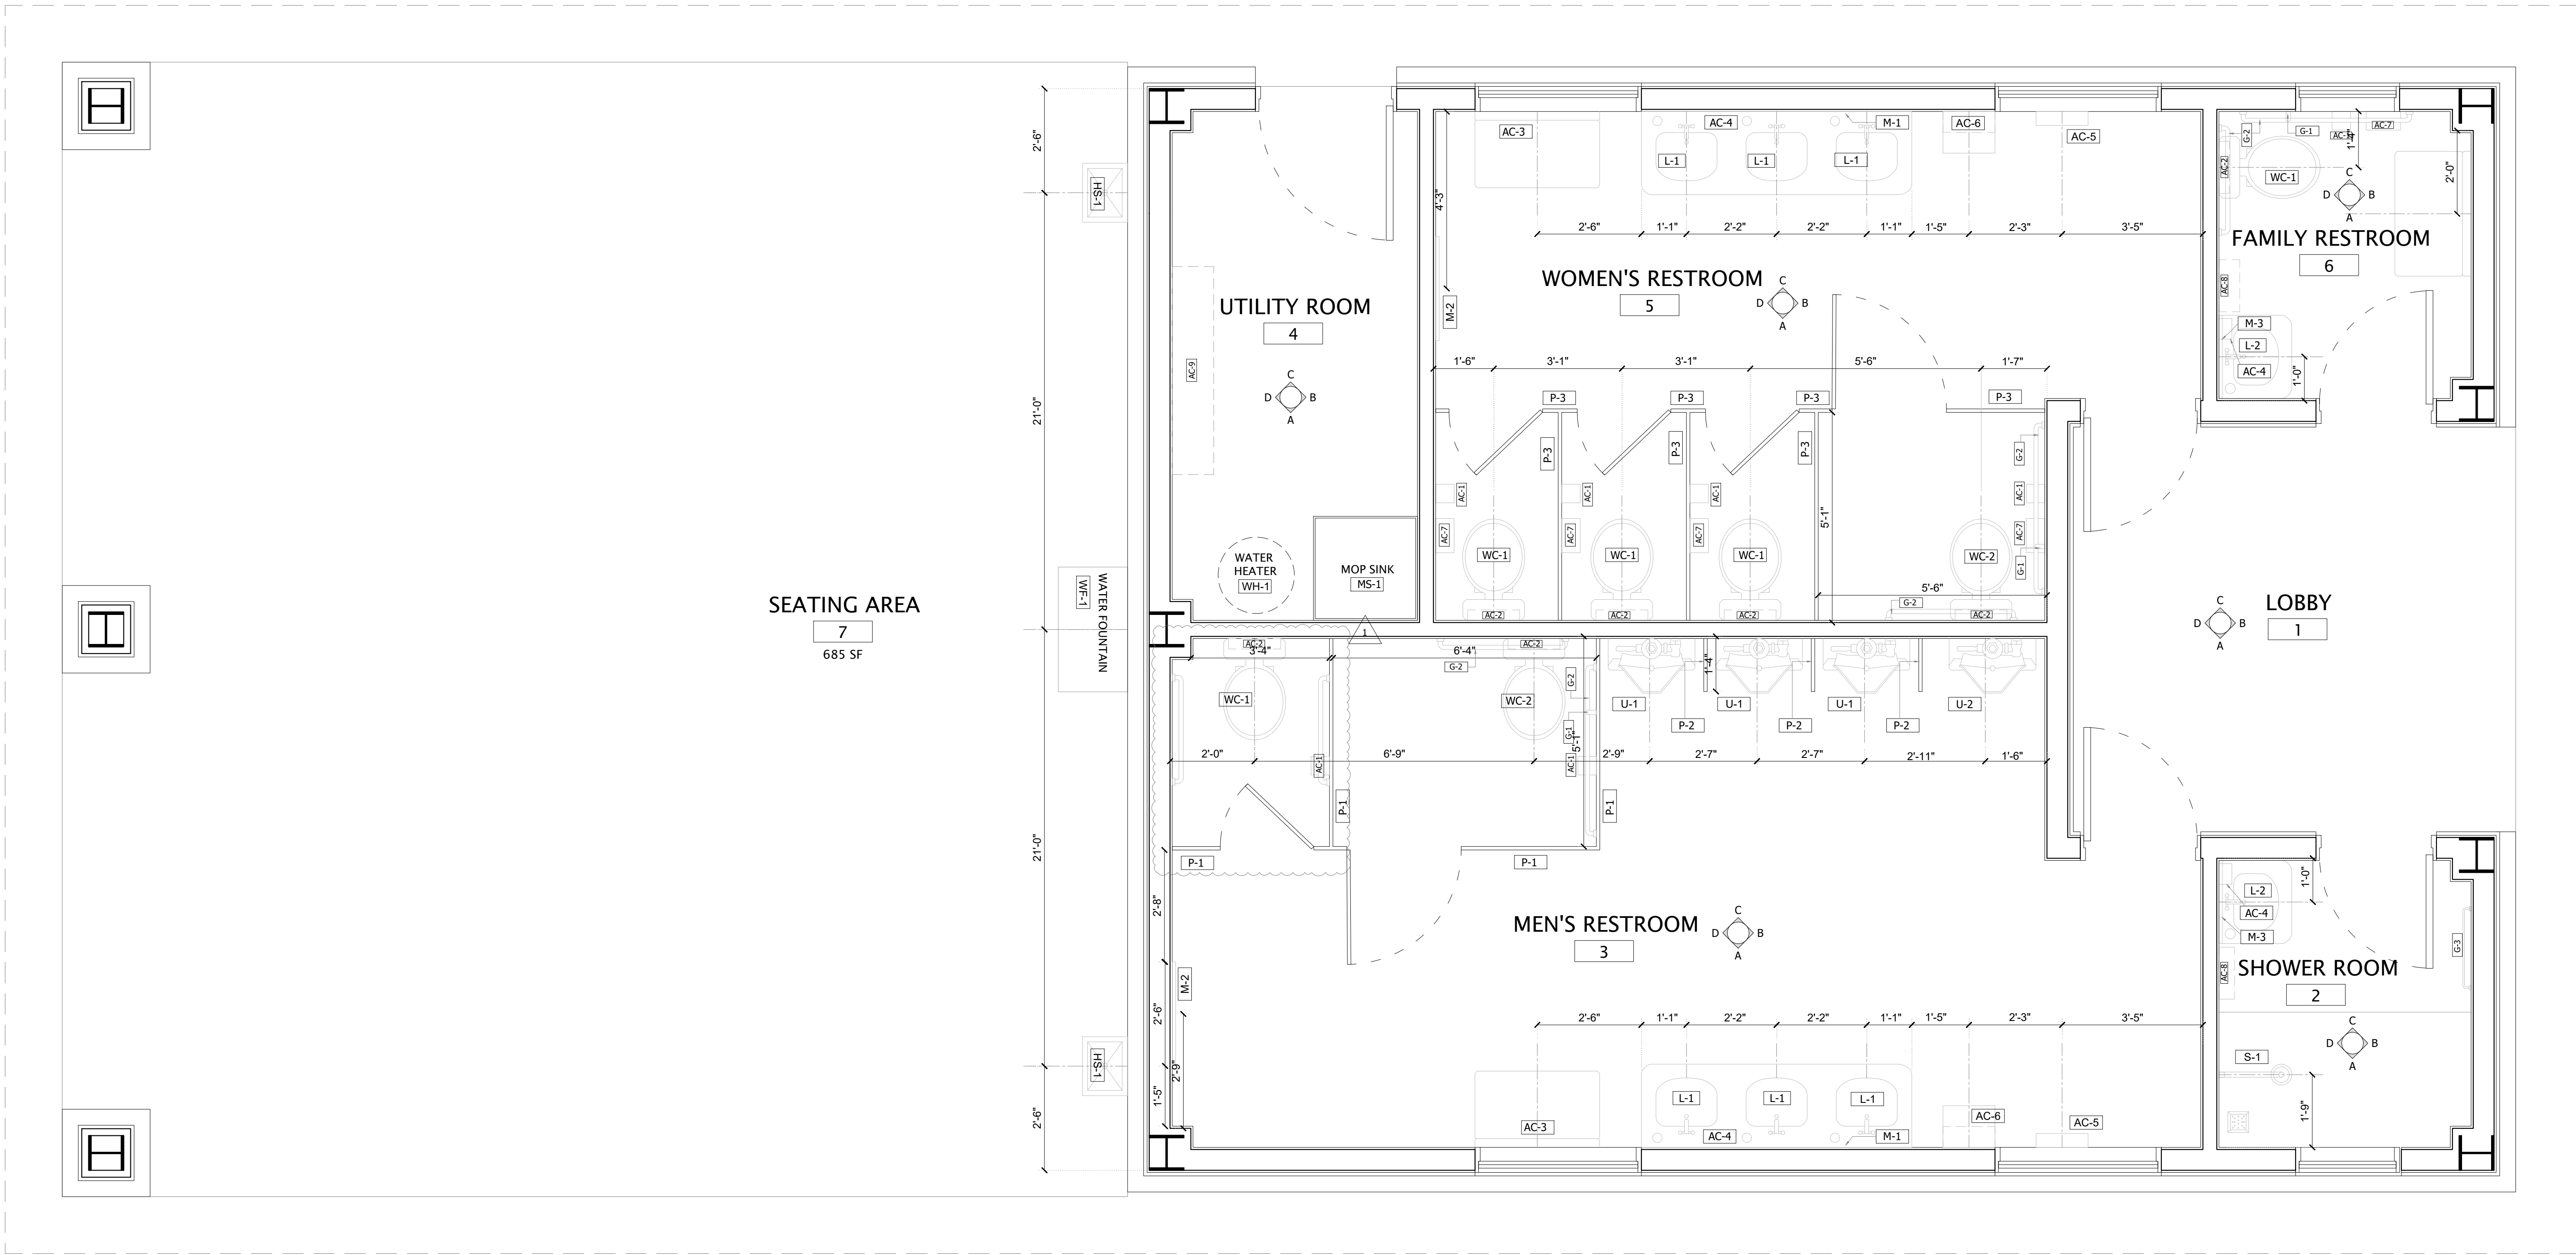

1 FIXTURES PLAN
C-202 / SCALE: 1/2" = 1'0"

- FIXTURES PLAN NOTES**
- A. REFER SHEET G-104 FOR ACCESSIBILITY REQUIREMENTS.
 - B. REFER SHEET C-301 FOR MOUNTING HEIGHTS, FITTINGS AND ACCESSORIES SCHEDULE.
 - C. REFER SHEET C-210 FOR INTERIOR ELEVATIONS.
 - D. ALL DIMENSIONS ARE TO THE CENTER LINE OF THE FIXTURES, UNO.
 - E. GC TO MARK AND VERIFY LOCATION OF ALL FITTINGS, ACCESSORIES WITH ENGINEER/ OWNER BEFORE INSTALLATION AT SITE.
 - F. PROVIDE 20 GAUGE METAL BLOCKING OR MANUFACTURER RECOMMENDED ATTACHMENT FOR WALL MOUNTED LAVATORY HARDWARE AND TOILET ACCESSORIES, UNO.
 - G. ALL PARTITIONS TO BE MOUNTED AND SECURED AS PER MANUFACTURER'S RECOMMENDATIONS.

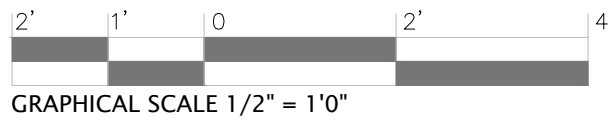


RESTROOMS
CAROLINA MURUGAN TEMPLE - PHASE 1
CLIENT: CAROLINA MURUGAN TEMPLE
100 MURUGAN CIR, MONCURE, NC 27559

DATE: 6/13/2025
SSN JOB ID: 1021-02-2024
DESIGNED BY: MK
DRAWN BY: BM
CHECKED BY: MK
REVIEWED BY: MN

SSN ENGINEERS
SSN ENGINEERS, PLLC
212 HENSLEY HILL PL., HOLLY SPRINGS, NC 27540
PHONE: 919-579-1490 INFO@SSNBUILDERS.COM FIRM LICENSE # P-2998

#	REVISIONS	DATE
1	REV-1	6/11/2025

FIXTURES PLAN

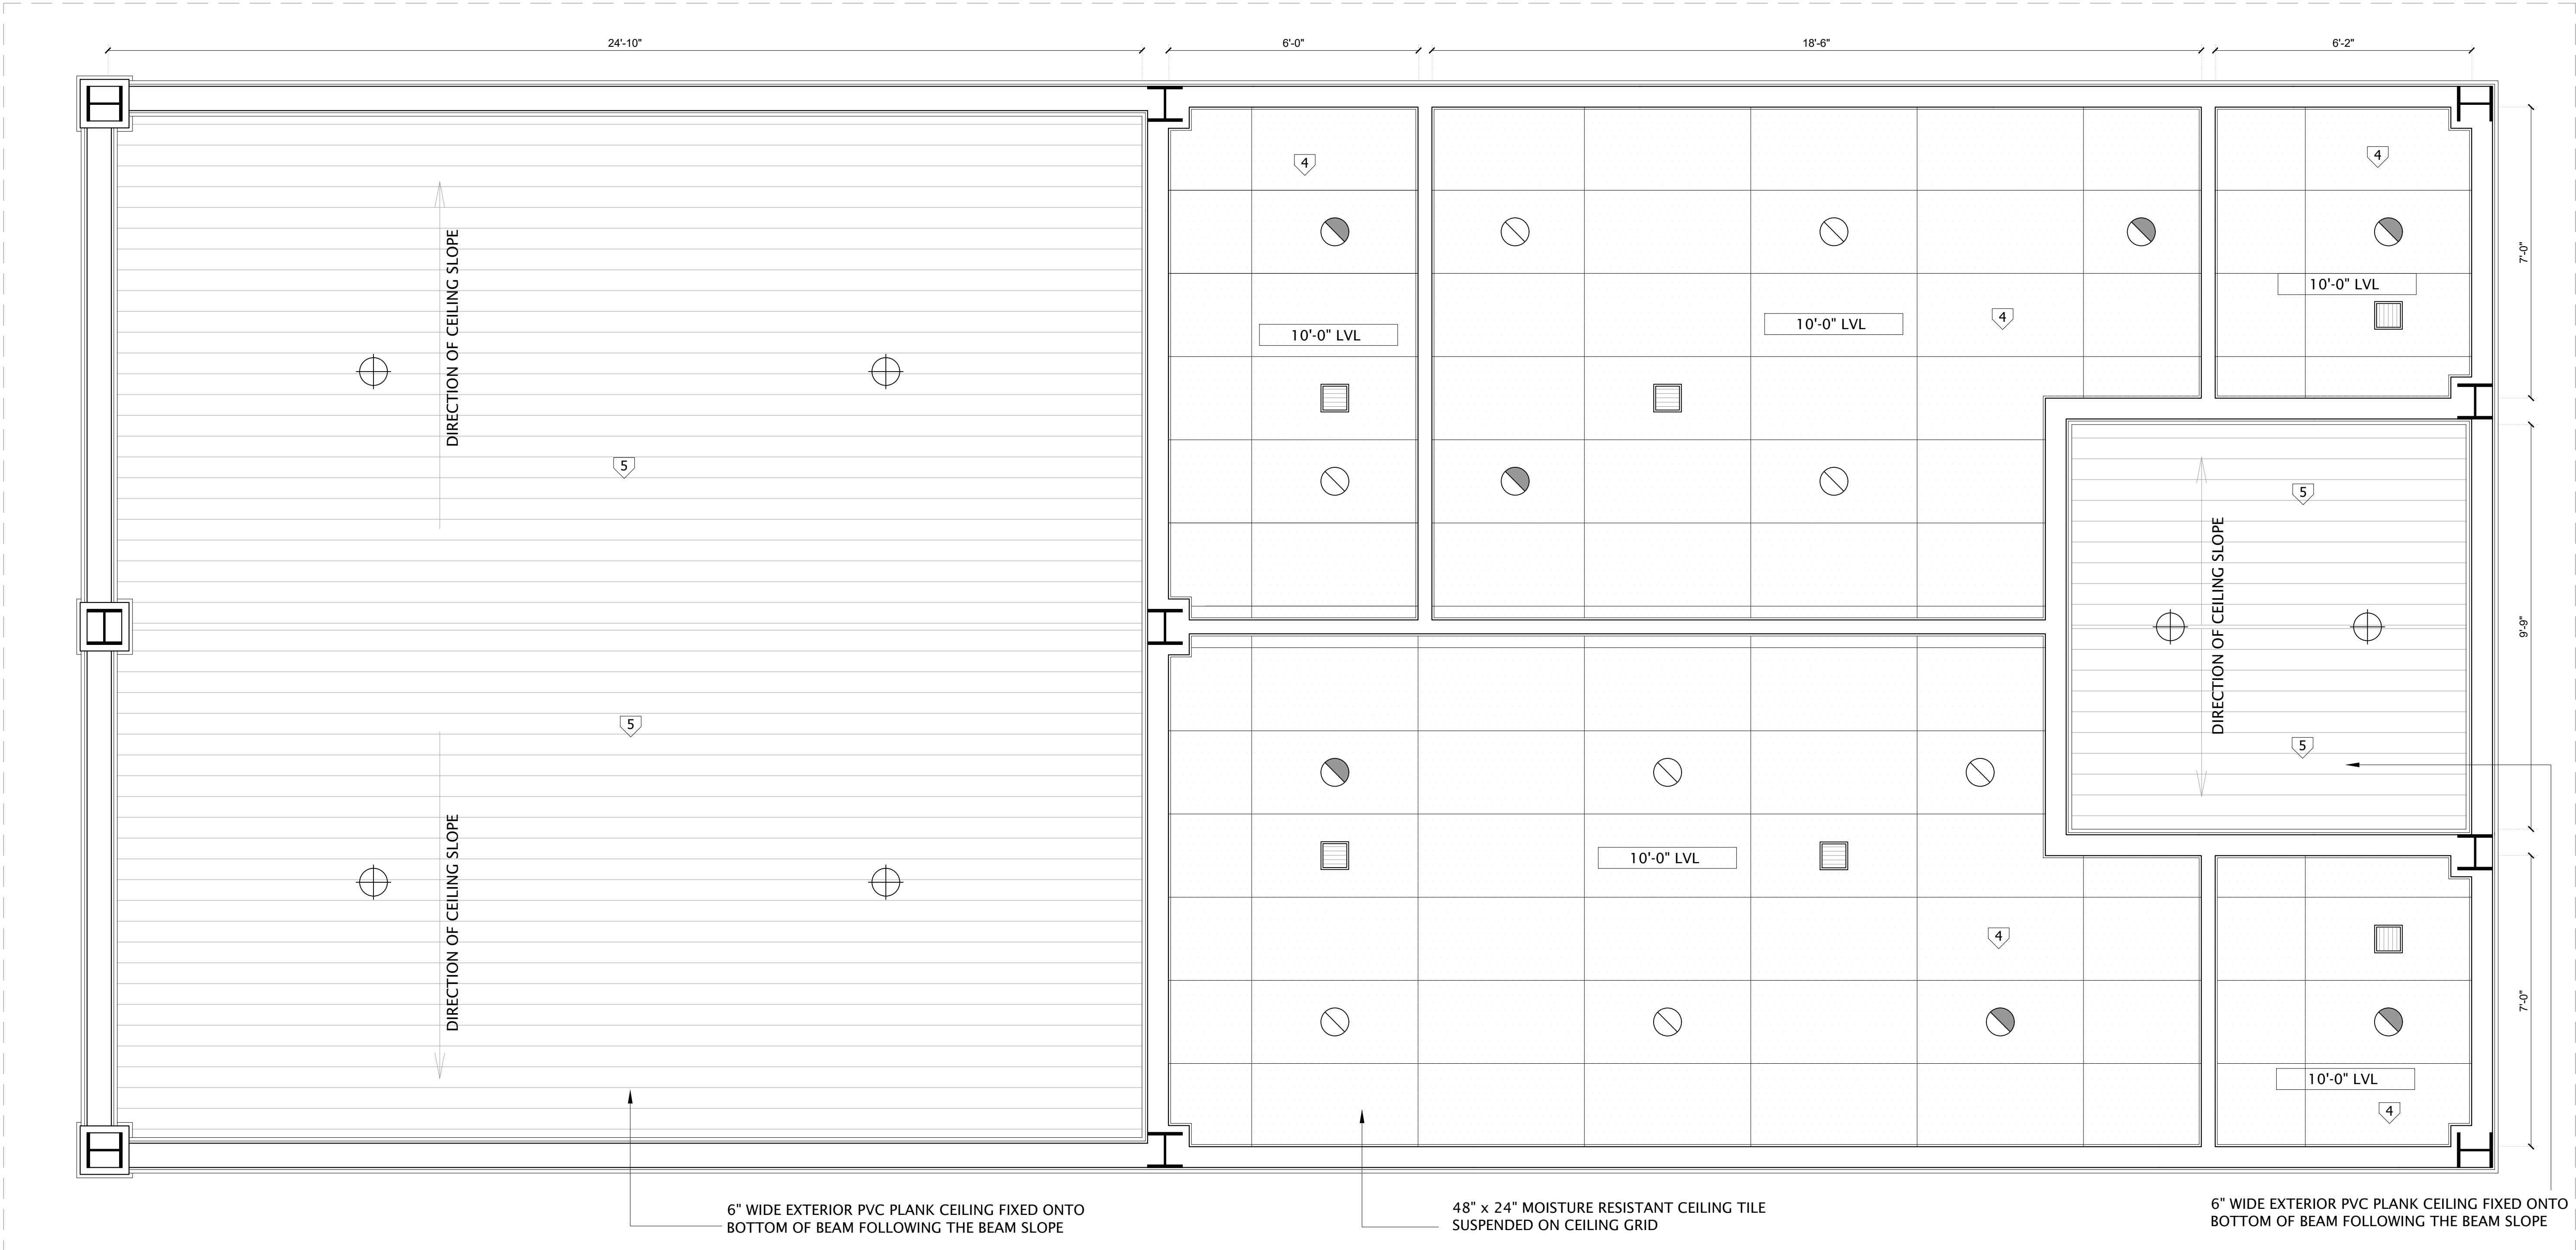

1 REFLECTED CEILING PLAN
C-203 / SCALE: 1/2" = 1'-0"


KEY NOTES

- FALSE CEILING FINISHES
- 4 24"x48" MOISTURE RESISTANT CEILING TILE
ARMSTRONG FINE FISSURED - IVORY - SQUARE
LAY-IN 15/16 OR APPROVED EQUAL.
- 5 GENERIC 1"x6"x8" PVC BEADED CEILING PLANK -
WHITE WITH PRIMED FINISH OR APPROVED EQUAL.
- FITTINGS
5. ALL THE CEILING MOUNTED DOWNLIGHTS TO BE
COMMERCIAL ELECTRIC - 4" LED ROUND CANLESS
RECESSED LIGHT - SOFT WHITE - OR APPROVED
EQUAL.
6. ALL THE CEILING MOUNTED EXHAUST GRILLS TO
BE BROAN-NUTONE 8" EXHAUST GRILLS - WHITE
OR APPROVED EQUAL.
7. ALL THE EXTERIOR PENDANT LIGHTS TO BE
VOLUME LIGHTING - MEDIUM 12" BLACK ALUMINUM
OUTDOOR CYLINDER PENDANT LIGHT OR
APPROVED EQUAL.

REFLECTED CEILING PLAN NOTES

- A. REFER TO ELECTRICAL PLAN FOR LIGHT FIXTURE AND
HEATER LOCATIONS, SIZE, TYPOLOGY AND DETAILS.
- B. REFER TO MECHANICAL PLAN FOR EXHAUST GRILLE
LOCATIONS, SIZE, TYPOLOGY AND DETAILS.
- C. ALL HANGERS AND TIE WIRES SHALL BE ANCHORED TO
BLDG STRUCTURE.

SUSPENSION DETAILS

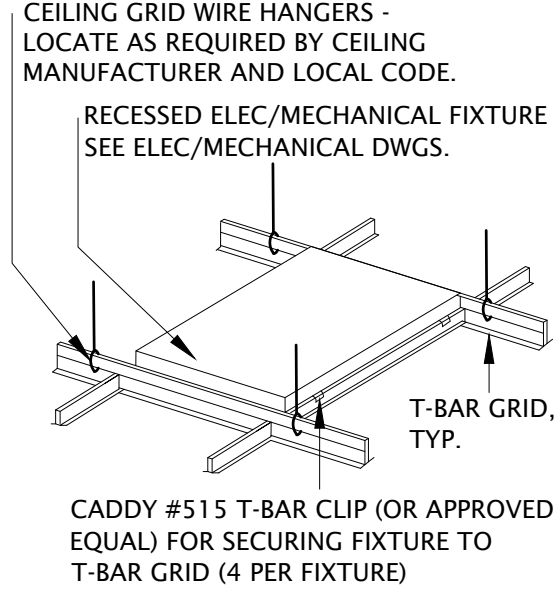

LEGEND

- EXTERIOR PVC PLANK
CEILING
- MOISTURE RESISTANT TILE
CEILING IN 48" x 24" GRID
- EXTERIOR PENDANT LIGHT
WITH INTEGRATED MOTION
SENSOR AND PHOTOCONTROL
- 4" ROUND DOWNLIGHT WET
LISTED WITH 90 MINUTES
BATTERY BACKUP
- 4" ROUND DOWNLIGHT WET
LISTED
- EXHAUST GRILLE

2' 1' 0' 2' 4'
GRAPHICAL SCALE 1/2" = 1'-0"

RESTROOMS
CAROLINA MURUGAN TEMPLE - PHASE 1
CLIENT: CAROLINA MURUGAN TEMPLE
100 MURUGAN CIR, MONCURE, NC 27559

DATE: 6/13/2025
SSN JOB ID: 1021-02-2024
DESIGNED BY: MK
DRAWN BY: BM
CHECKED BY: MK
REVIEWED BY: MN



#	REVISIONS	DATE

REFLECTED CEILING PLAN

C - 203



1

ROOF PLAN

C-204 / SCALE: 1/2" = 1'-0"


METAL ROOF RIDGE

METAL ROOF PANELS ON METAL DECK
ROOFING SYSTEM

6" GUTTER WITH DOWNSPOUTS

- KEY NOTES:**
- 6 STANDING SEAM - GALVALUME COATED METAL ROOF PANEL- REGAL BLUE OR APPROVED EQUAL
 - 7 GALVALUME COATED - BLACK POWDER COATED METAL BOX GUTTER WITH DOWNSPOUT FINISH OR APPROVED EQUAL

- ROOF PLAN NOTES:**
- A. REFER TO MECHANICAL DRAWINGS FOR EXHAUST LOCATIONS AND DETAILS.
 - B. REFER TO PLUMBING DRAWINGS FOR VENT LOCATIONS AND DETAILS.
 - C. REFER TO SHEET C-301 FOR MATERIALS AND FINISHES LEGEND.
 - D. ALL VENT PIPES, EXHAUSTS, ETC. EXTENDING ABOVE THE ROOF SURFACE MUST BE PAINTED TO A COLOR THAT BLENDS WITH THE ROOF COLOR.

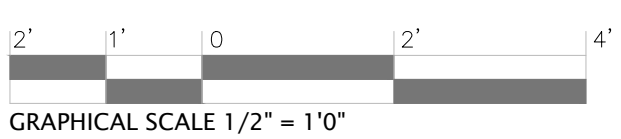



RESTROOMS CAROLINA MURUGAN TEMPLE - PHASE 1	DATE: 6/13/2025	 SSN ENGINEERS, PLLC 212 HENSLEY HILL PL., HOLLY SPRINGS, NC 27540 PHONE: 919-579-1490 INFO@SSNBUILDERS.COM FIRM LICENSE # P-2998		#	REVISIONS	DATE	ROOF PLAN	C - 204
	SSN JOB ID: 1021-02-2024							
DESIGNED BY: MK								
DRAWN BY: BM								
CHECKED BY: MK								
CLIENT: CAROLINA MURUGAN TEMPLE 100 MURUGAN CIR, MONCURE, NC 27559	REVIEWED BY: MN							

EXTERIOR ELEVATION NOTES

- A. REFER TO ELECTRICAL DRAWINGS FOR LIGHT FIXTURE, HEATER LOCATIONS AND DETAILS.
B. REFER TO PLUMBING DRAWINGS FOR EXTERIOR FIXTURE LOCATIONS, MOUNTING HEIGHTS AND DETAILS.
C. ALL EXTERIOR OPENING TRIMS TO BE FIBER CEMENT BOARDS.

KEY NOTES

- 9 EXTERIOR FIBRE CEMENT PANEL BOARD - JAMES HARDIE PANEL SIDING - CEDARMILL - SILVER HERRING OR APPROVED EQUAL
10 EXTERIOR FIBREGLASS COLUMN WRAP - RESINART DURACRAFT WHITE OR APPROVED EQUAL
11 BRICK CLADDING - BRICKWORKS GLEN-GERY MOUNTAIN SHADOW SMOOTH OR APPROVED EQUAL

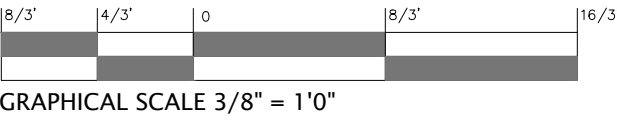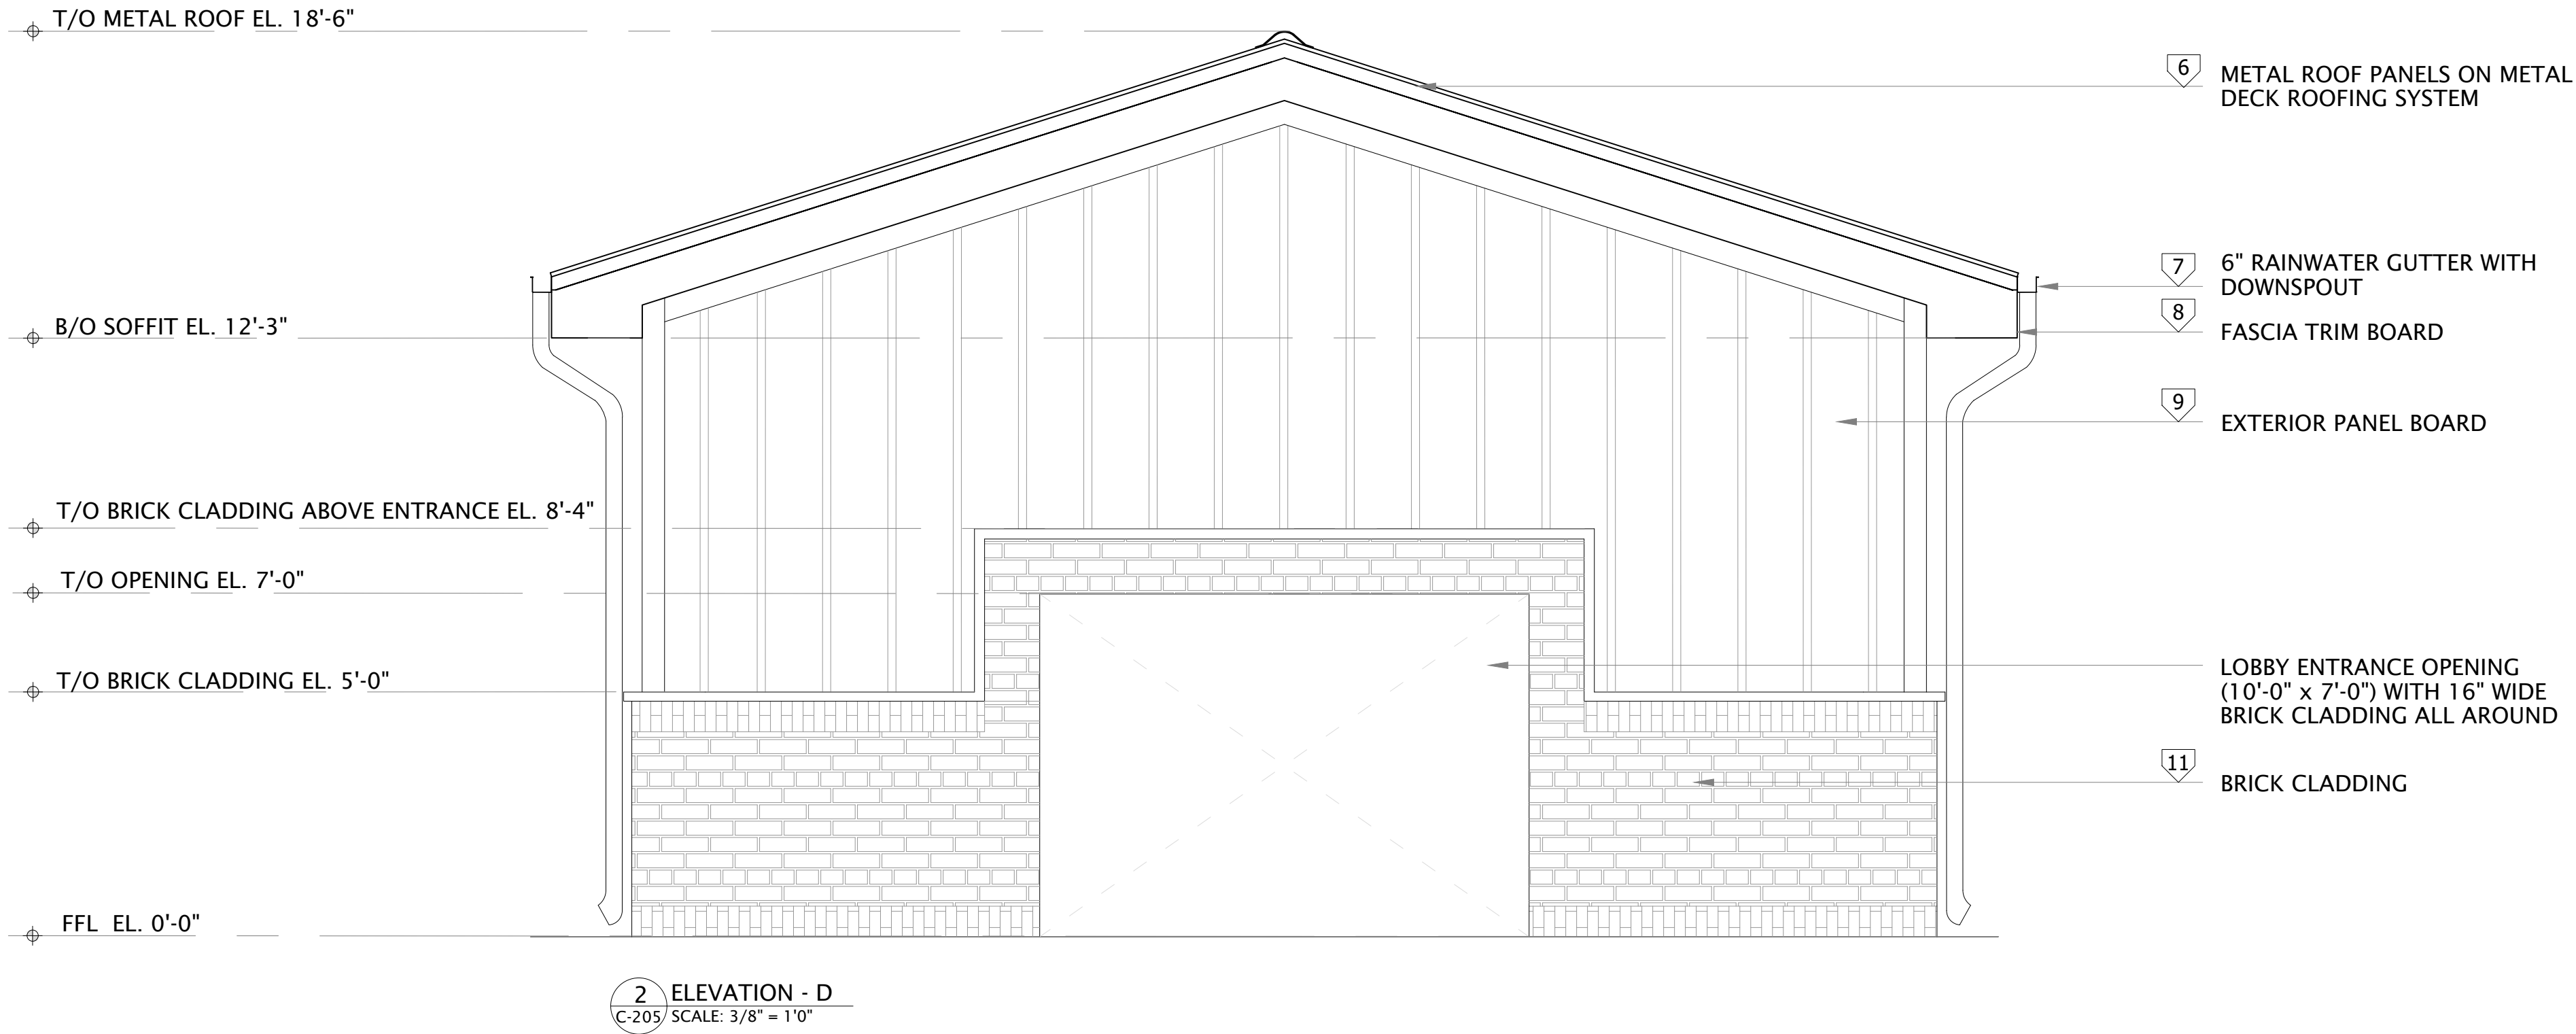

RESTROOMS
CAROLINA MURUGAN TEMPLE - PHASE 1
CLIENT: CAROLINA MURUGAN TEMPLE
100 MURUGAN CIR, MONCURE, NC 27559

DATE: 6/13/2025
SSN JOB ID: 1021-02-2024
DESIGNED BY: MK
DRAWN BY: BM
CHECKED BY: MK
REVIEWED BY: MN



#	REVISIONS	DATE

EXTERIOR ELEVATIONS


C - 205

EXTERIOR ELEVATION NOTES


- A. REFER TO ELECTRICAL DRAWINGS FOR LIGHT FIXTURE, HEATER LOCATIONS AND DETAILS.
B. REFER TO PLUMBING DRAWINGS FOR EXTERIOR FIXTURE LOCATIONS, MOUNTING HEIGHTS AND DETAILS.
C. ALL EXTERIOR OPENING TRIMS TO BE FIBER CEMENT BOARDS.

KEY NOTES


- 9 EXTERIOR FIBRE CEMENT PANEL BOARD - JAMES HARDIE PANEL SIDING - CEDARMILL - SILVER HERRING OR APPROVED EQUAL
10 EXTERIOR FIBREGLASS COLUMN WRAP - RESINART DURACRAFT WHITE OR APPROVED EQUAL
11 BRICK CLADDING - BRICKWORKS GLEN-GERY MOUNTAIN SHADOW SMOOTH OR APPROVED EQUAL
12 EXTERIOR FIBRE CEMENT TRIM - JAMES HARDIE TRIM - SMOOTH TEXTURE - PAINTED TO SW-EXTRA WHITE OR APPROVED EQUAL

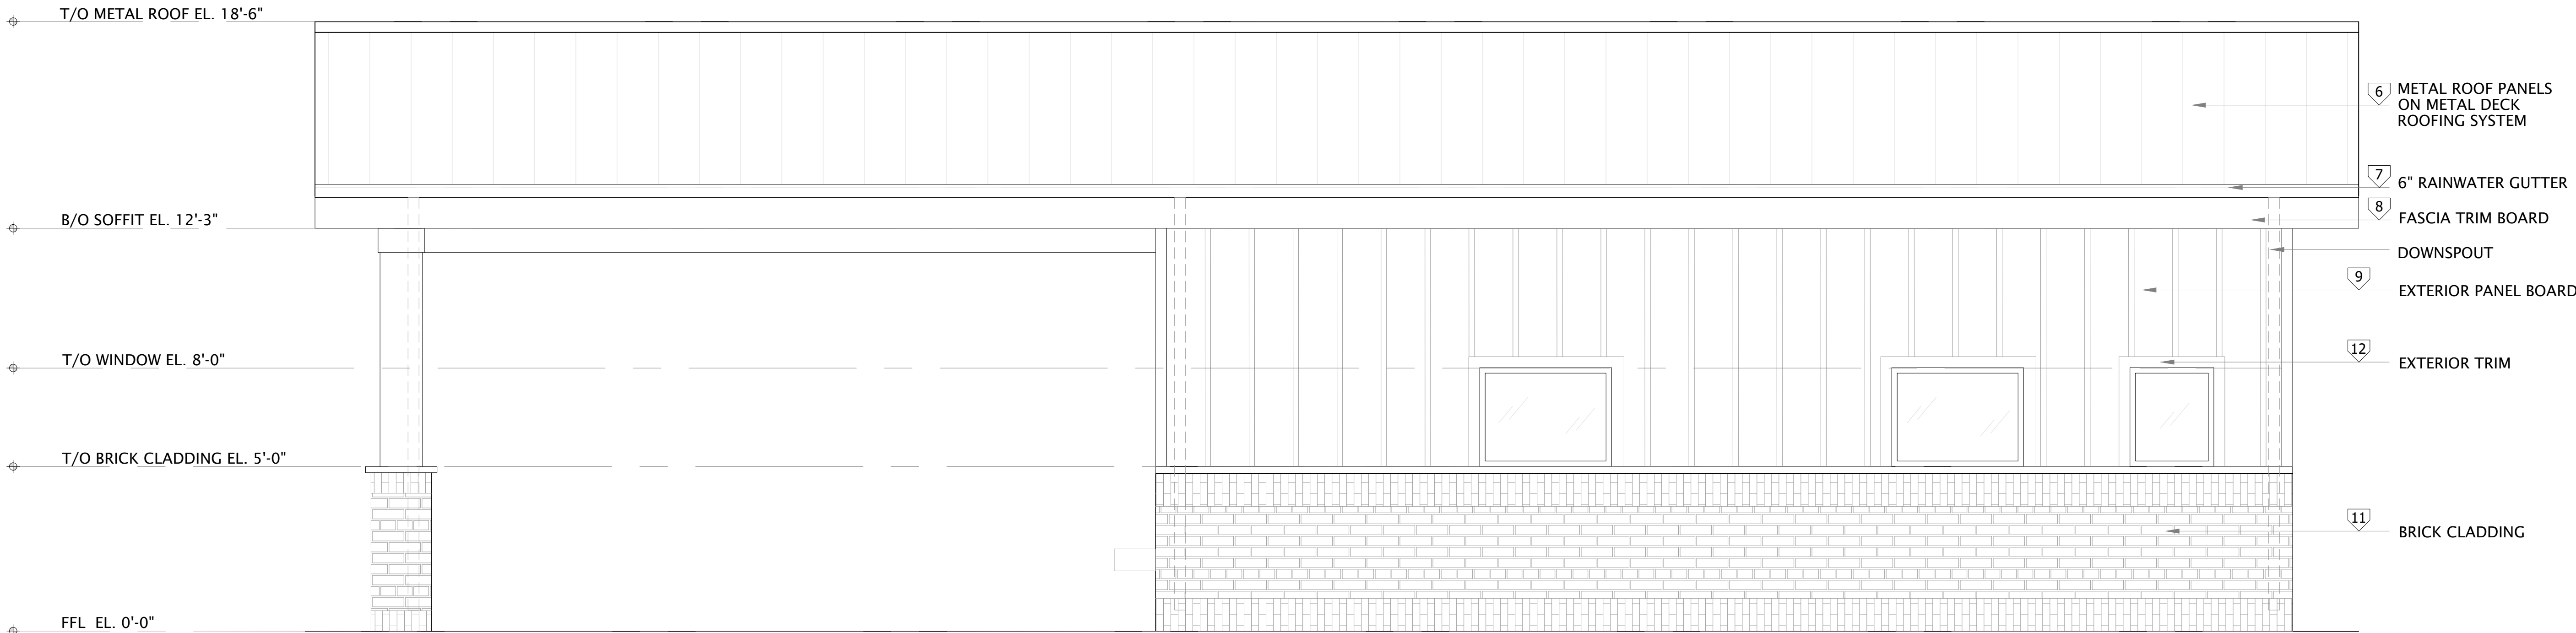

1 ELEVATION - A
C-206 SCALE: 3/8" = 1'-0"

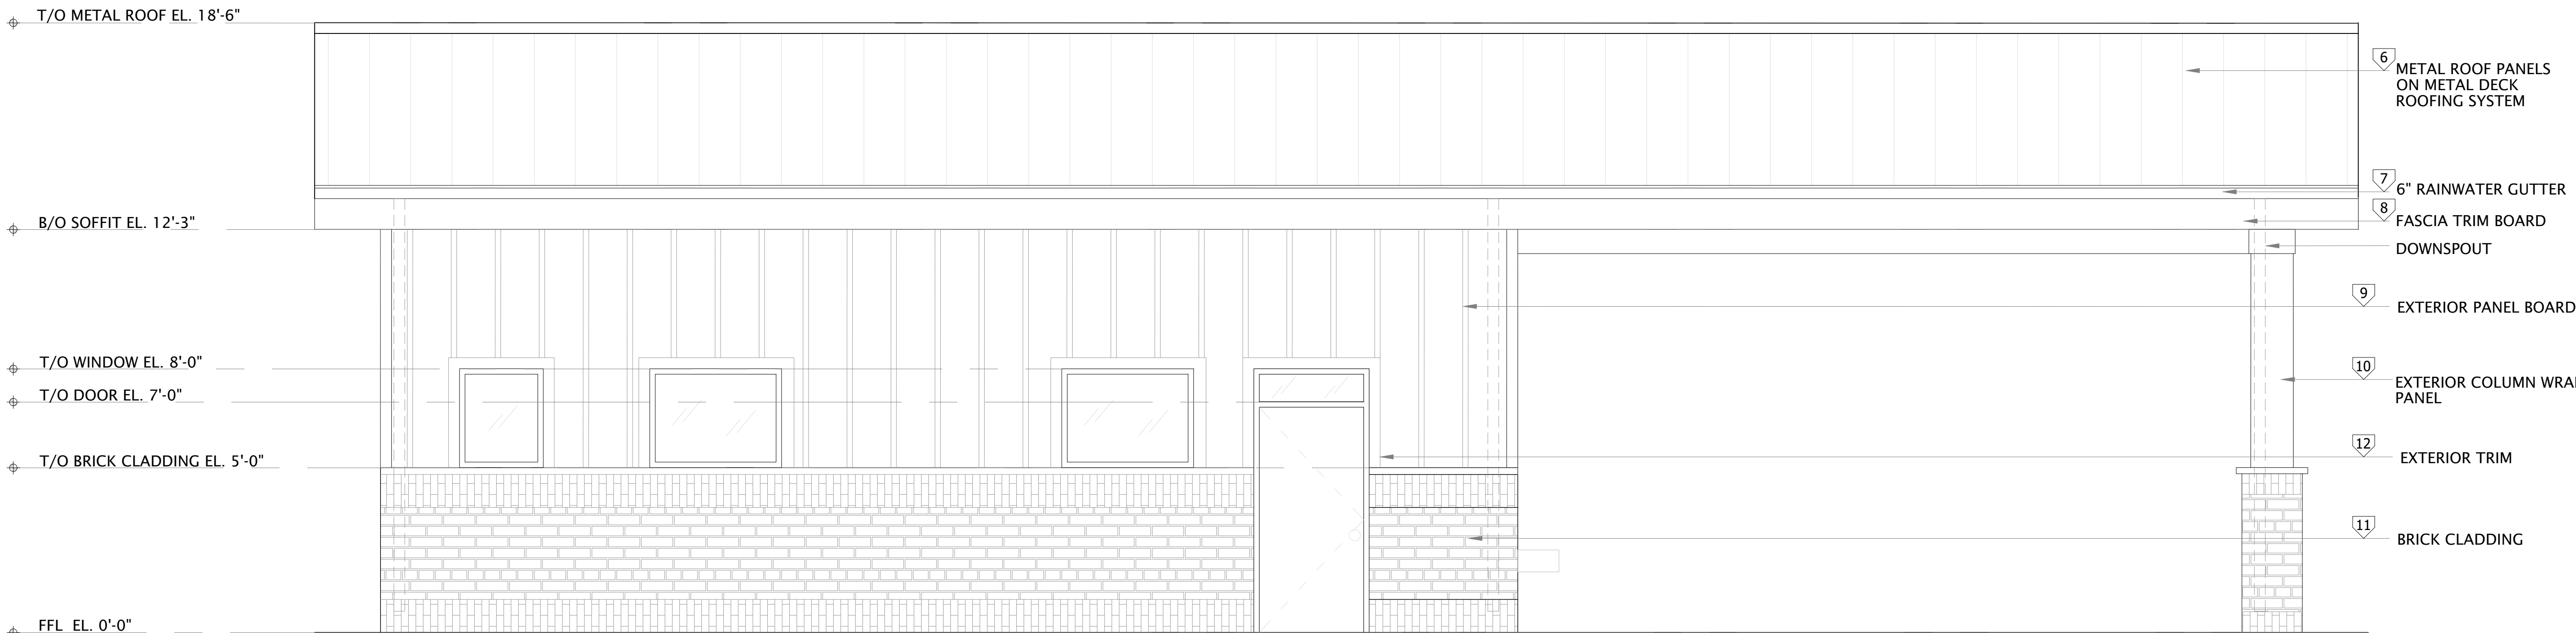

2 ELEVATION - C
C-206 SCALE: 3/8" = 1'-0"

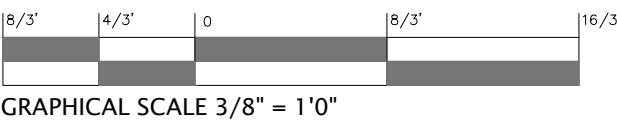

GRAPHICAL SCALE 3/8" = 1'-0"

RESTROOMS
CAROLINA MURUGAN TEMPLE - PHASE 1
CLIENT: CAROLINA MURUGAN TEMPLE
100 MURUGAN CIR, MONCURE, NC 27559




DATE: 6/13/2025
SSN JOB ID: 1021-02-2024
DESIGNED BY: MK
DRAWN BY: BM
CHECKED BY: MK
REVIEWED BY: MN




#	REVISIONS	DATE

EXTERIOR ELEVATIONS

C - 206

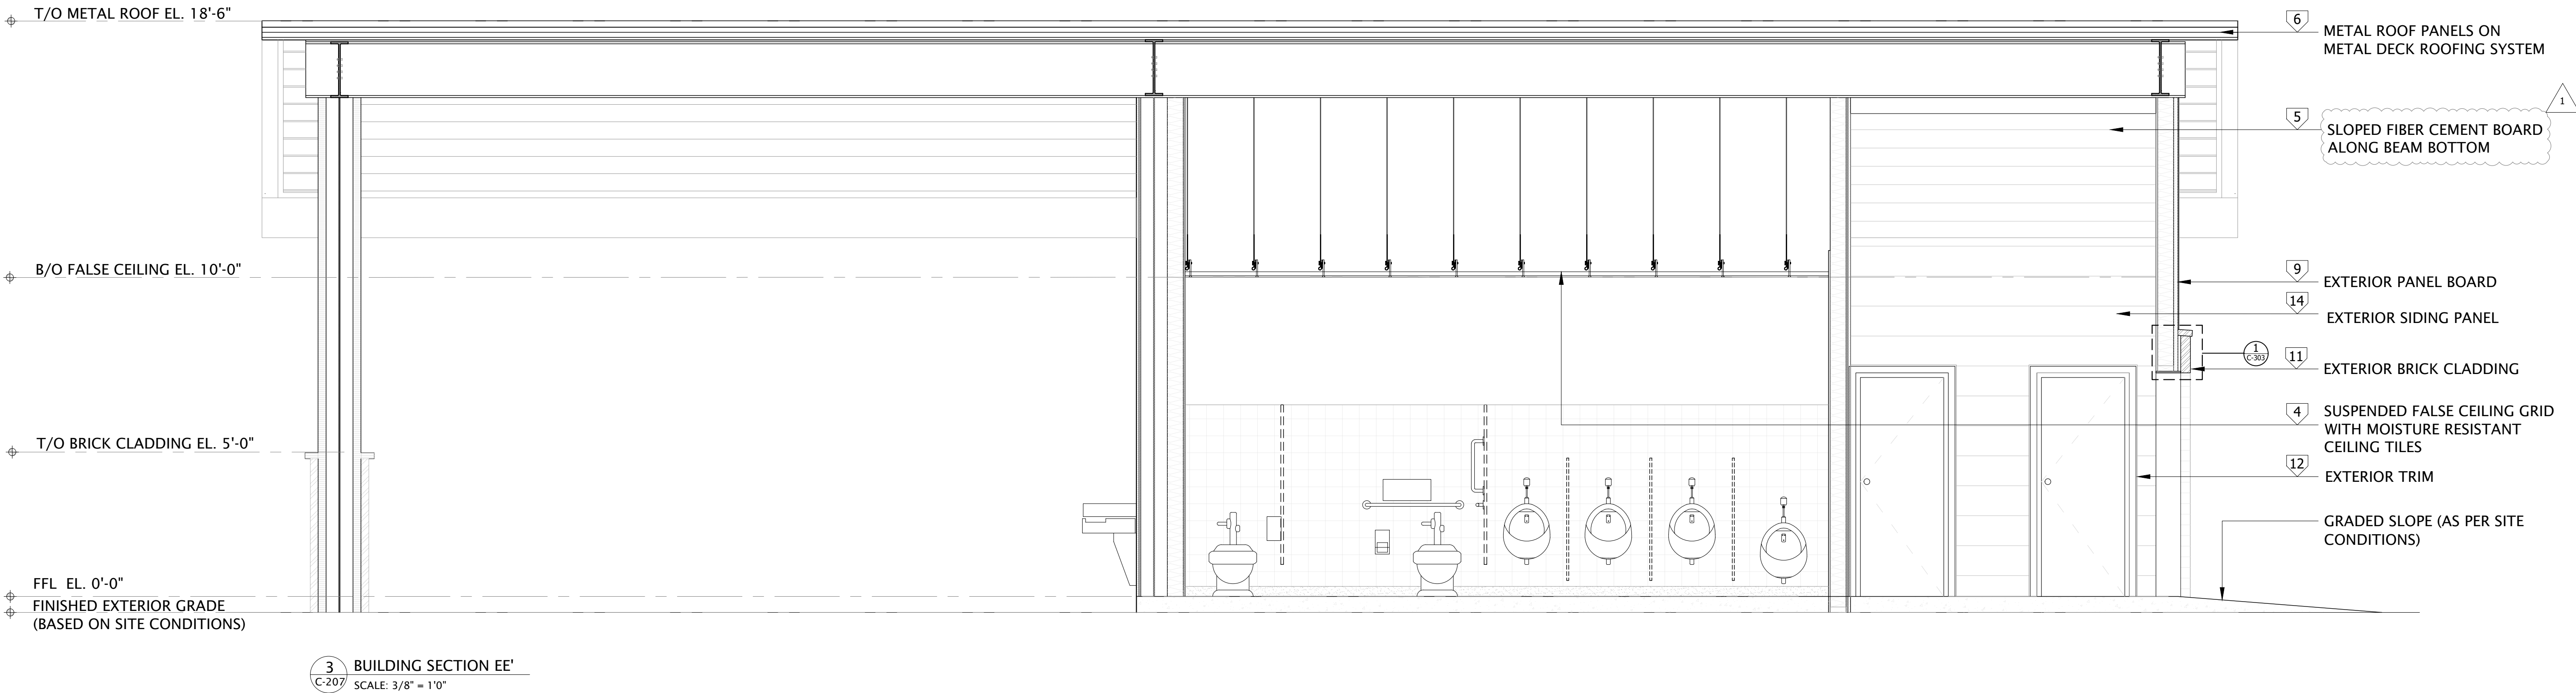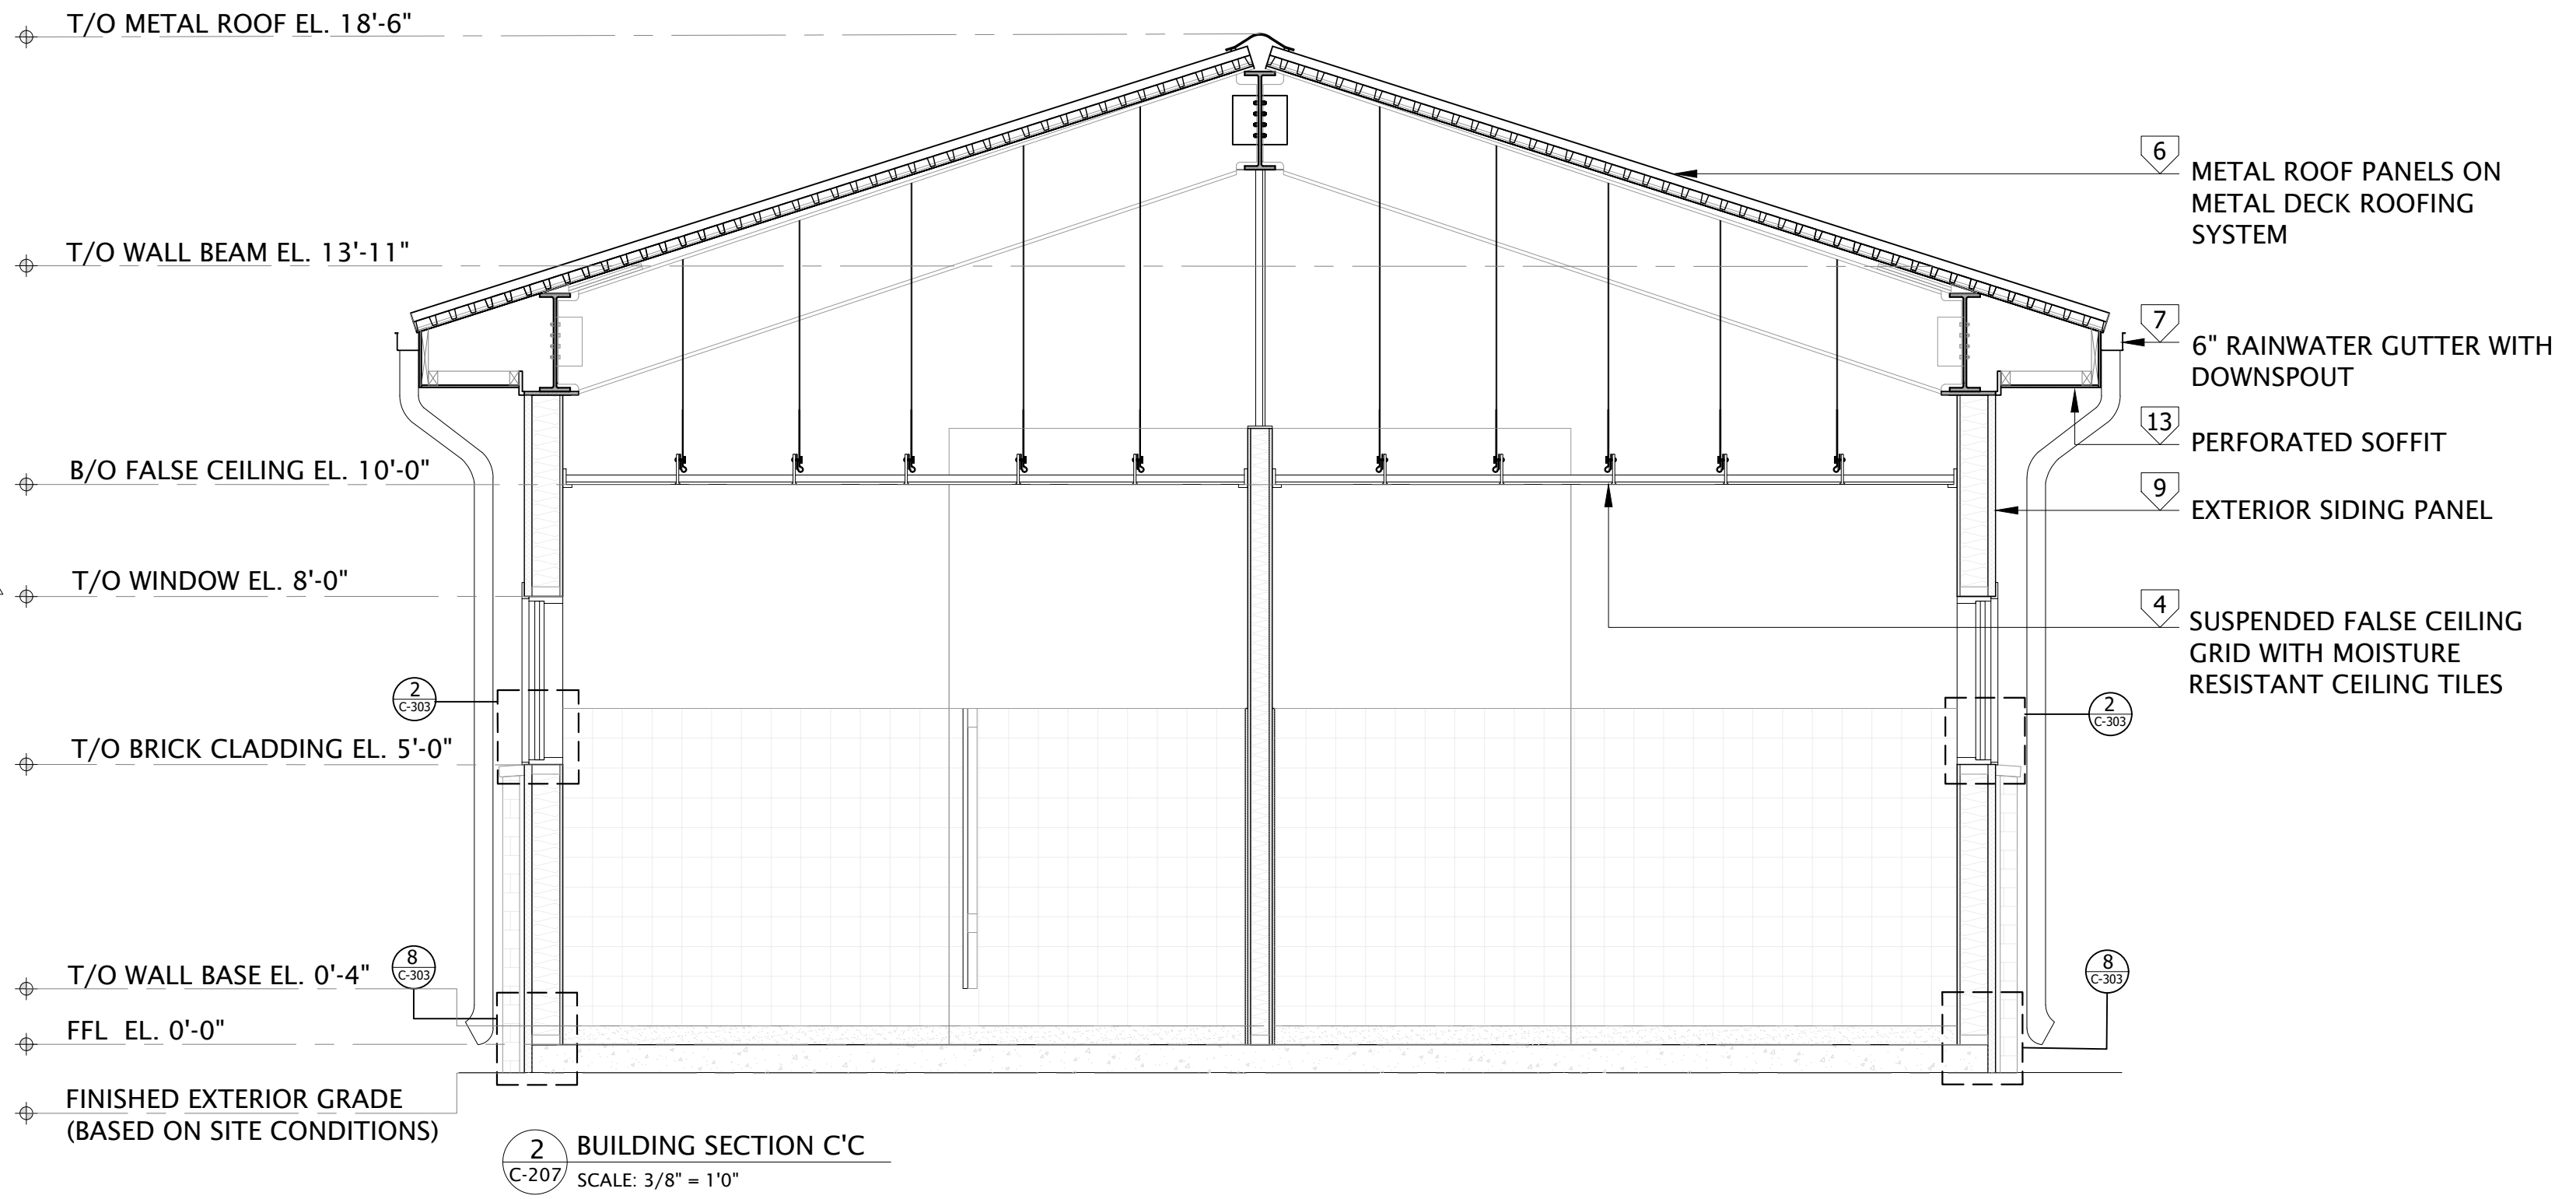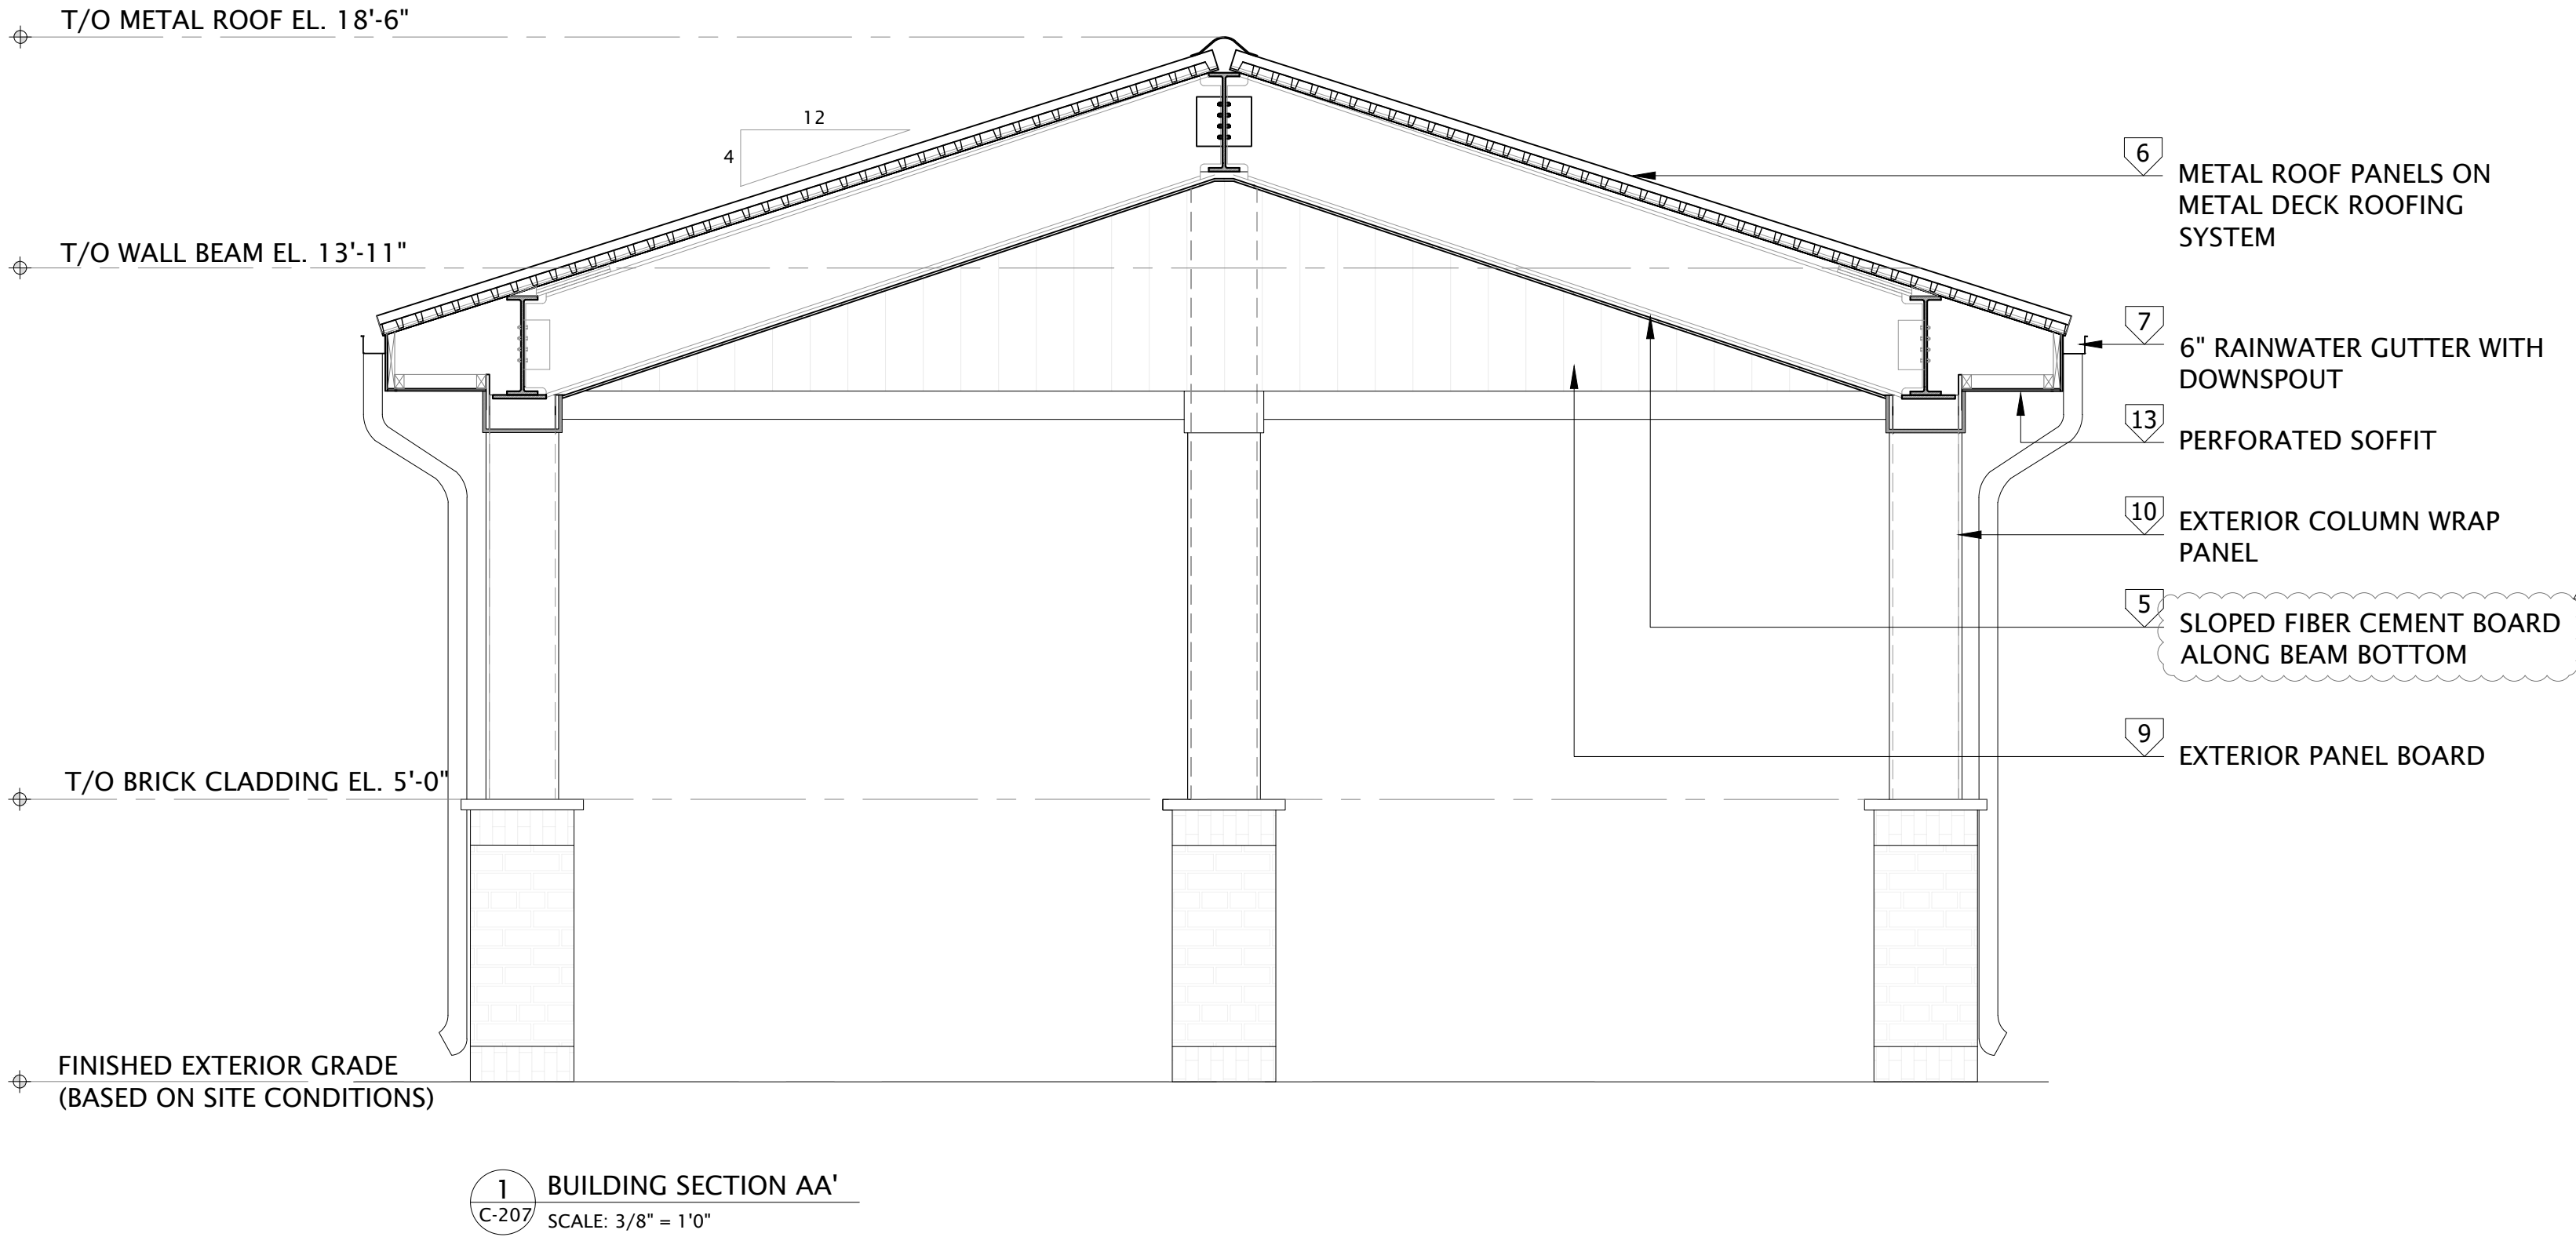

- BUILDING SECTION NOTES**
- A. REFER TO ELECTRICAL DRAWINGS FOR LIGHT FIXTURE LOCATIONS AND DETAILS.
 - B. REFER TO PLUMBING DRAWINGS FOR EXTERIOR FIXTURE LOCATIONS AND DETAILS.
 - C. ALL EXTERIOR OPENING TRIMS TO BE FIBER CEMENT BOARDS.
 - D. ALL INTERIOR OPENING TRIMS TO BE COMPOSITE BOARDS.
- KEY NOTES**
- 4 24"x48"x5/8" MOISTURE RESISTANT CEILING TILE ARMSTRONG FINE FISSURED - IVORY - SQUARE LAY-IN 15/16 OR APPROVED EQUAL
 - 5 ALLURA 16"x12" FIBER CEMENT BOARD - WHITE 12' X 16' OR APPROVED EQUAL
 - 9 EXTERIOR FIBRE CEMENT PANEL BOARD - JAMES HARDIE PANEL SIDING - CEDARMILL - SILVER HERRING OR APPROVED EQUAL
 - 10 EXTERIOR FIBREGLASS COLUMN WRAP - RESINART DURACRAFT WHITE OR APPROVED EQUAL
 - 11 BRICK CLADDING - BRICKWORKS GLEN-GERY MOUNTAIN SHADOW SMOOTH OR APPROVED EQUAL
 - 12 EXTERIOR FIBER CEMENT TRIM - JAMES HARDIE TRIM - SMOOTH - PRIMED FOR PAINT (SW-EXTRA WHITE) OR APPROVED EQUAL
 - 14 EXTERIOR FIBRE CEMENT SIDING - JAMES HARDIE ARTISAN SIDING - V-GROOVE - PRIMED FOR PAINT (SW-OLYMPUS WHITE) OR APPROVED EQUAL

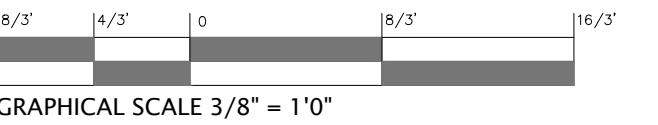

RESTROOMS
CAROLINA MURUGAN TEMPLE - PHASE 1
CLIENT: CAROLINA MURUGAN TEMPLE
100 MURUGAN CIR, MONCURE, NC 27559

DATE: 6/13/2025
SSN JOB ID: 1021-02-2024
DESIGNED BY: MK
DRAWN BY: BM
CHECKED BY: MK
REVIEWED BY: MN



#	REVISIONS	DATE
1	REV-1	6/11/2025

BUILDING SECTIONS




C - 207

BUILDING SECTION NOTES

- A. REFER TO ELECTRICAL DRAWINGS FOR LIGHT FIXTURE LOCATIONS AND DETAILS.
B. REFER TO PLUMBING DRAWINGS FOR FIXTURE LOCATIONS AND DETAILS.
C. ALL EXTERIOR OPENING TRIMS TO BE FIBER CEMENT BOARDS.
D. ALL INTERIOR OPENING TRIMS TO BE COMPOSITE BOARDS.

KEY NOTES

- 4 24"x48"x5/8" MOISTURE RESISTANT CEILING TILE
ARMSTRONG FINE FISSURED - IVORY - SQUARE
LAY-IN 15/16 OR APPROVED EQUAL
- 5 ALLURA 16"x12" FIBER CEMENT BOARD - WHITE 12' X 16'
OR APPROVED EQUAL
- 9 EXTERIOR FIBRE CEMENT PANEL BOARD - JAMES HARDIE
PANEL SIDING - CEDARMILL - SILVER HERRING OR
APPROVED EQUAL
- 12 EXTERIOR FIBRE CEMENT TRIM - JAMES HARDIE TRIM -
SMOOTH - PRIMED FOR PAINT (SW-EXTRA WHITE) OR
APPROVED EQUAL
- 14 EXTERIOR FIBRE CEMENT SIDING - JAMES HARDIE ARTISAN
SIDING - V-GROOVE - PRIMED FOR PAINT (SW-OLYMPUS
WHITE) OR APPROVED EQUAL

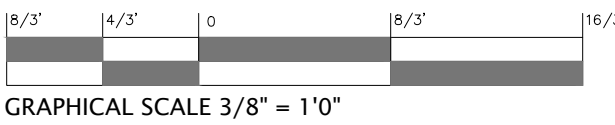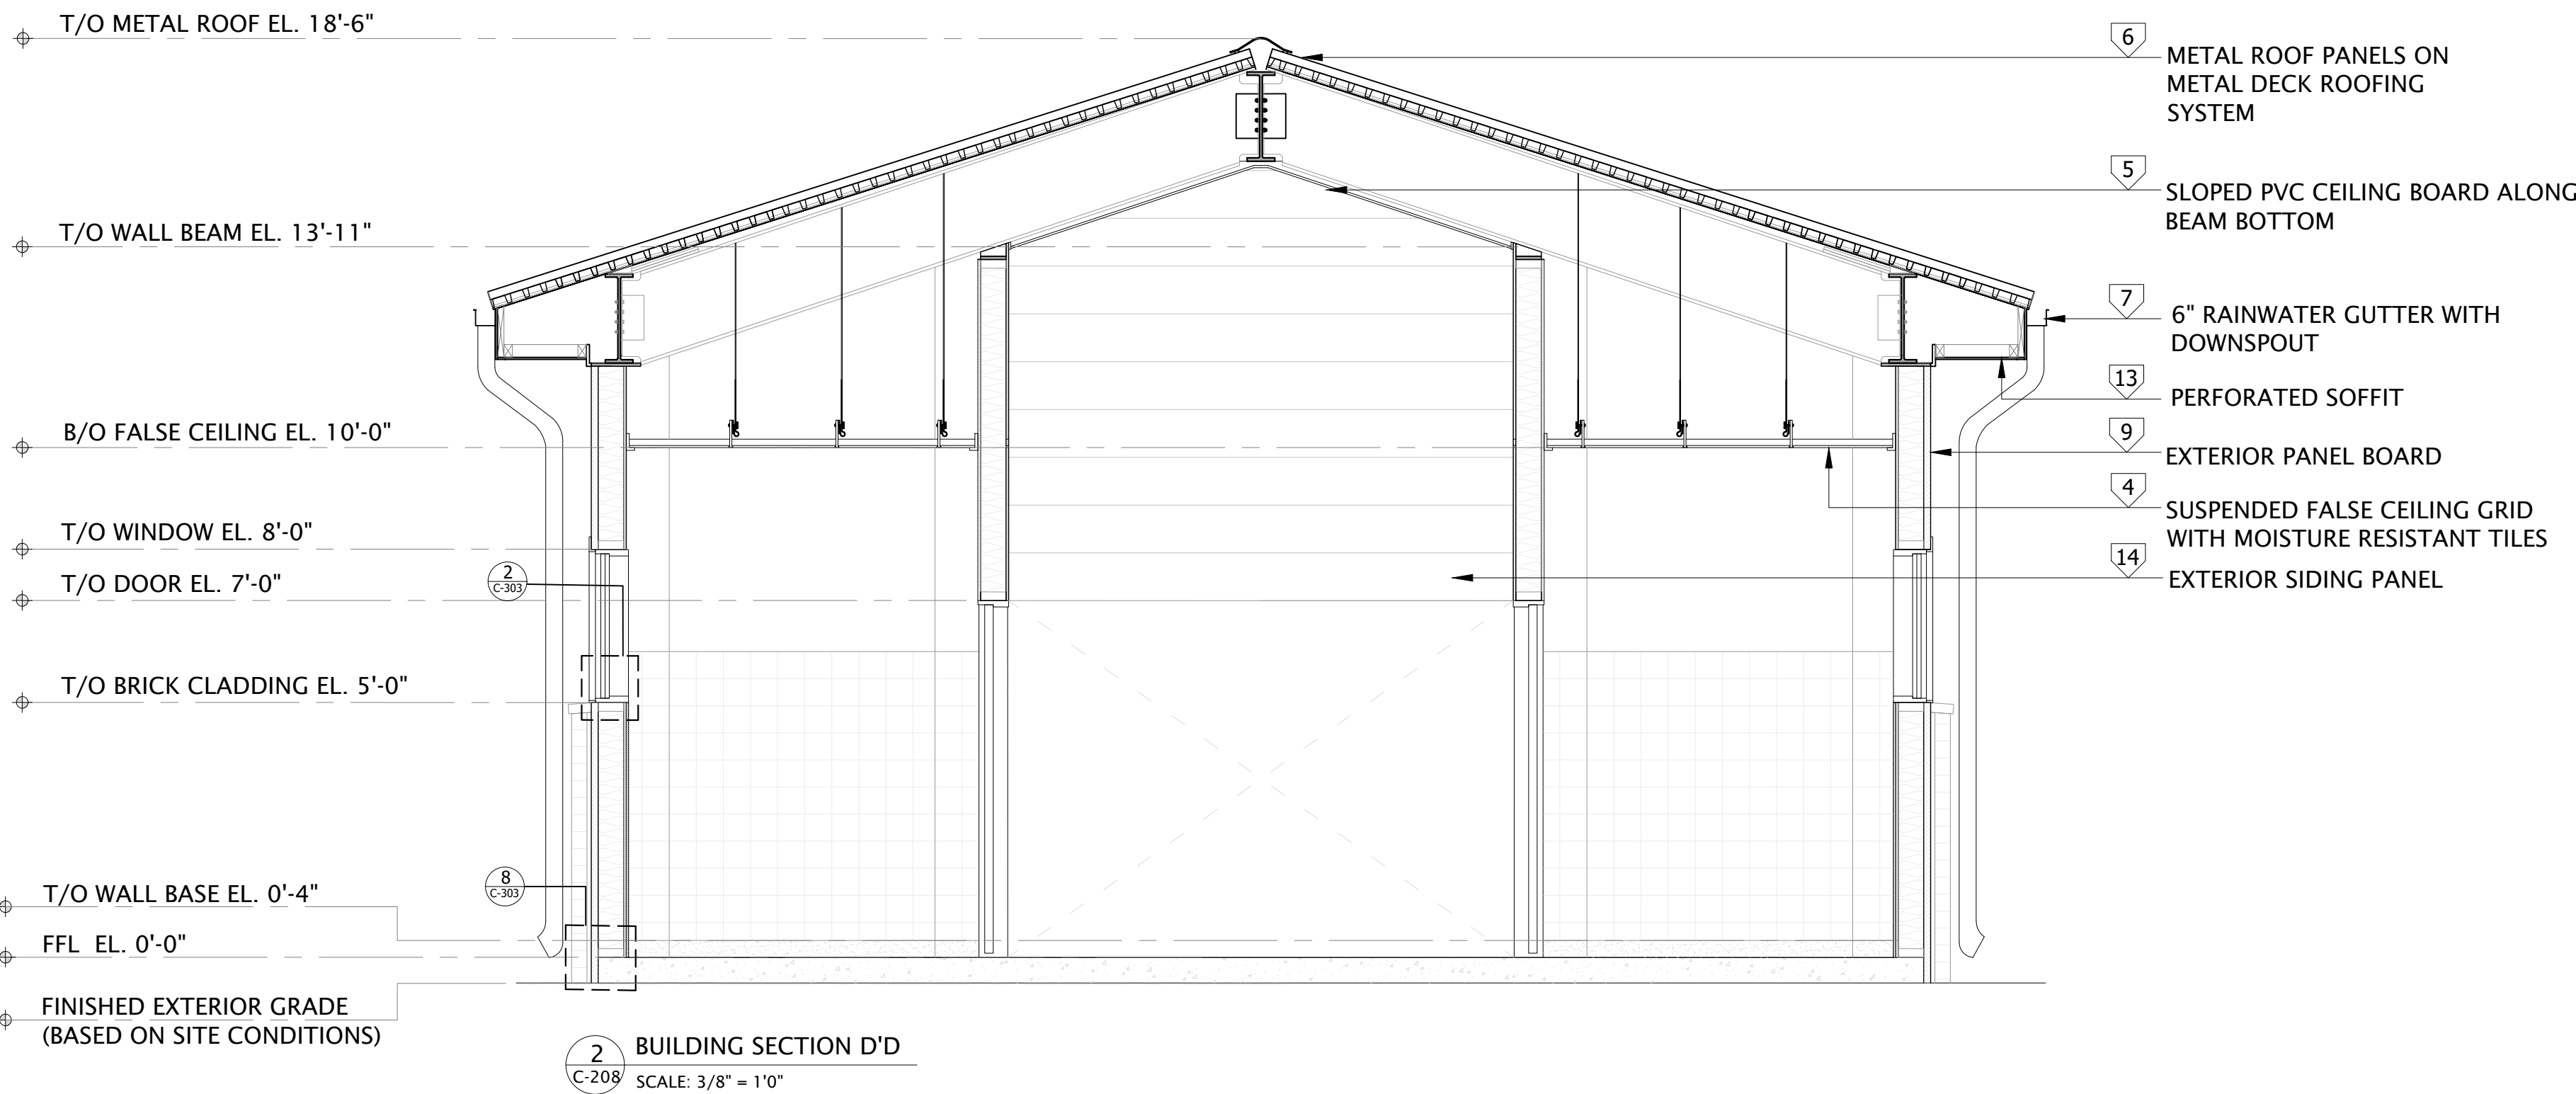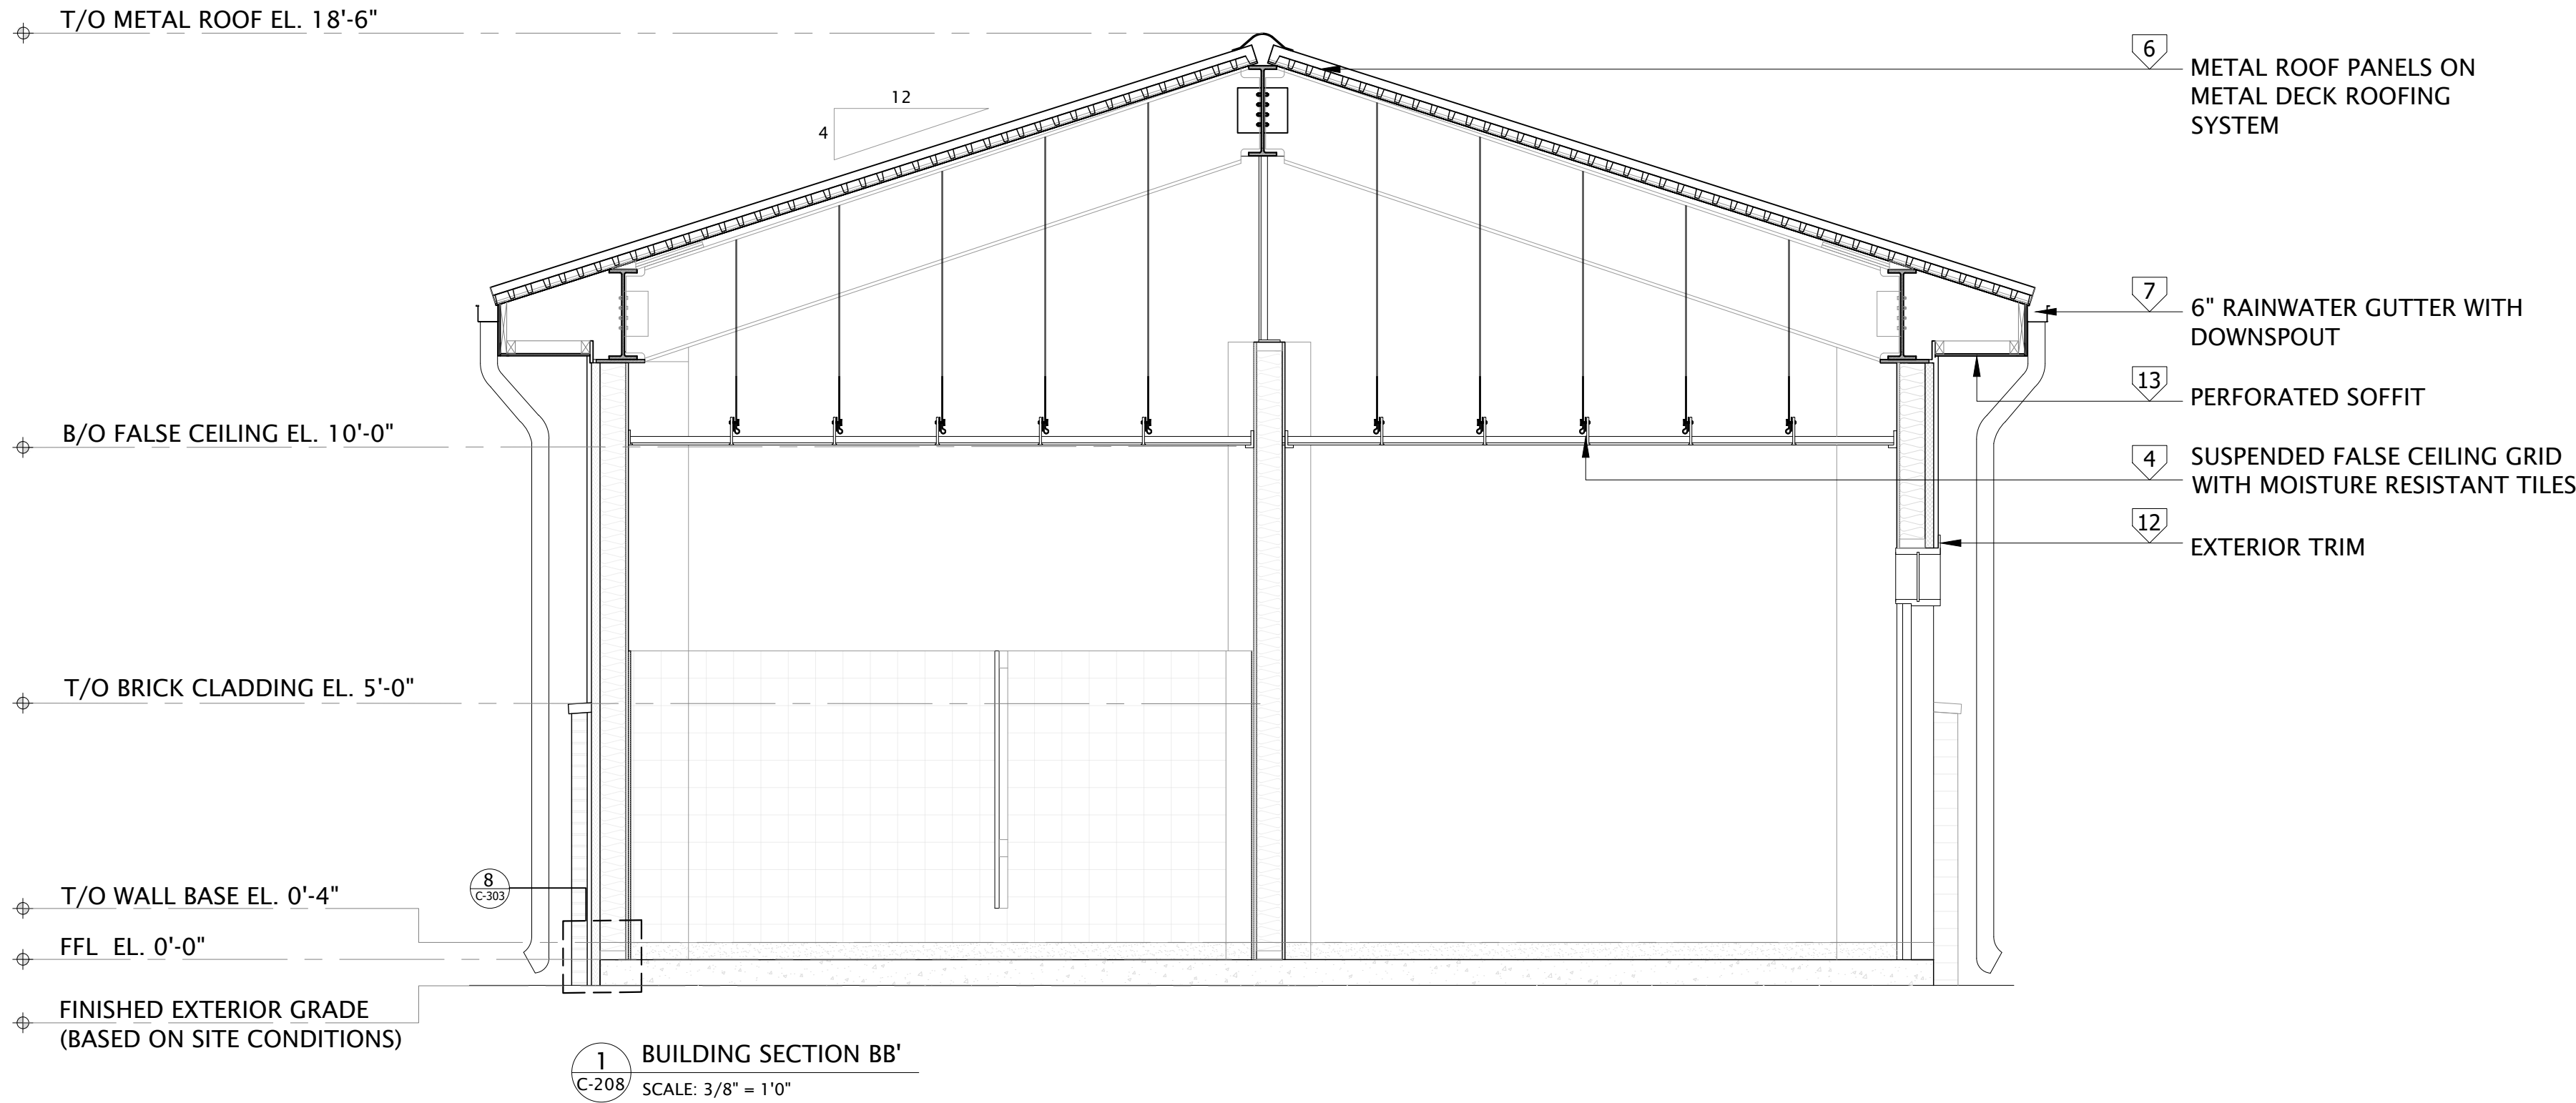

RESTROOMS

CAROLINA MURUGAN TEMPLE - PHASE 1

CLIENT: CAROLINA MURUGAN TEMPLE
100 MURUGAN CIR, MONCURE, NC 27559




DATE: 6/13/2025
SSN JOB ID: 1021-02-2024
DESIGNED BY: MK
DRAWN BY: BM
CHECKED BY: MK
REVIEWED BY: MN




#	REVISIONS	DATE
1	REV-1	6/11/2025

BUILDING SECTIONS

C - 208

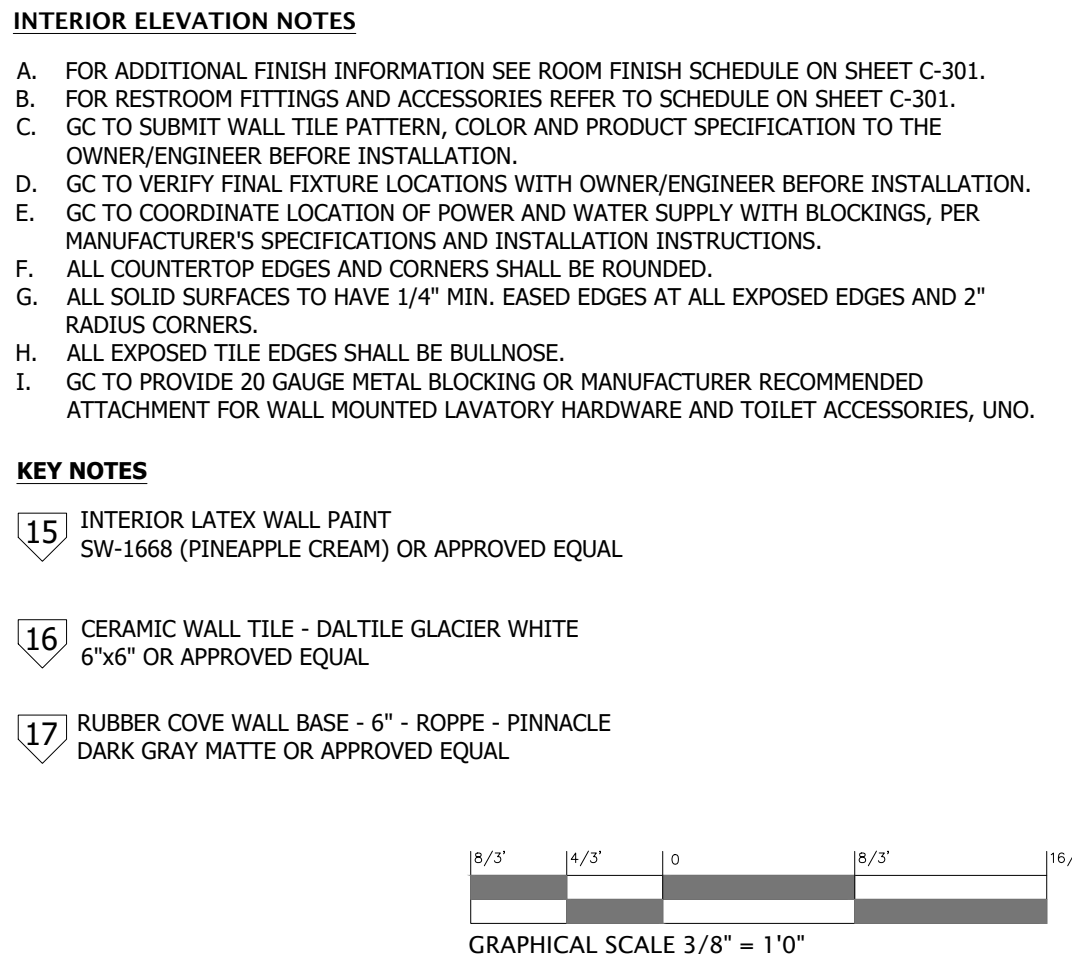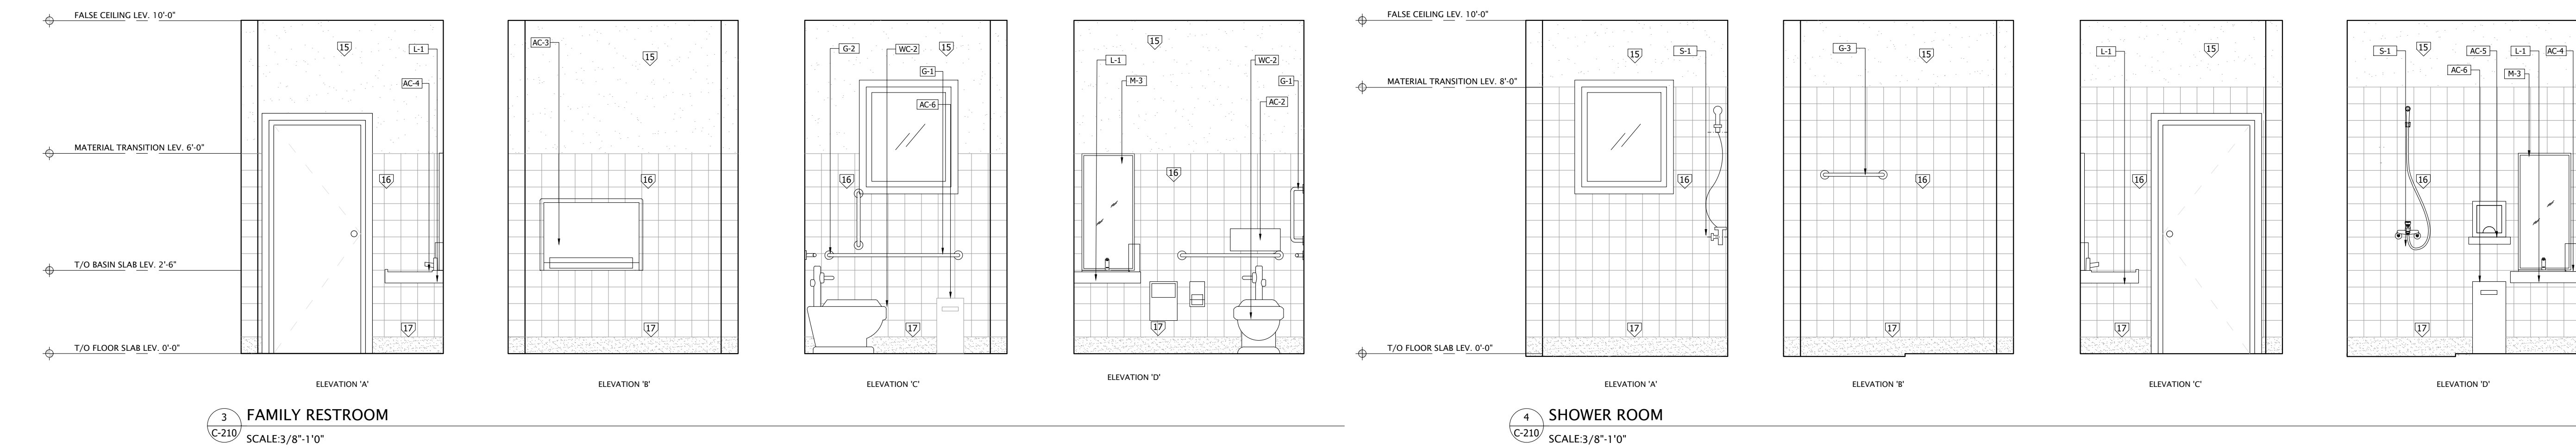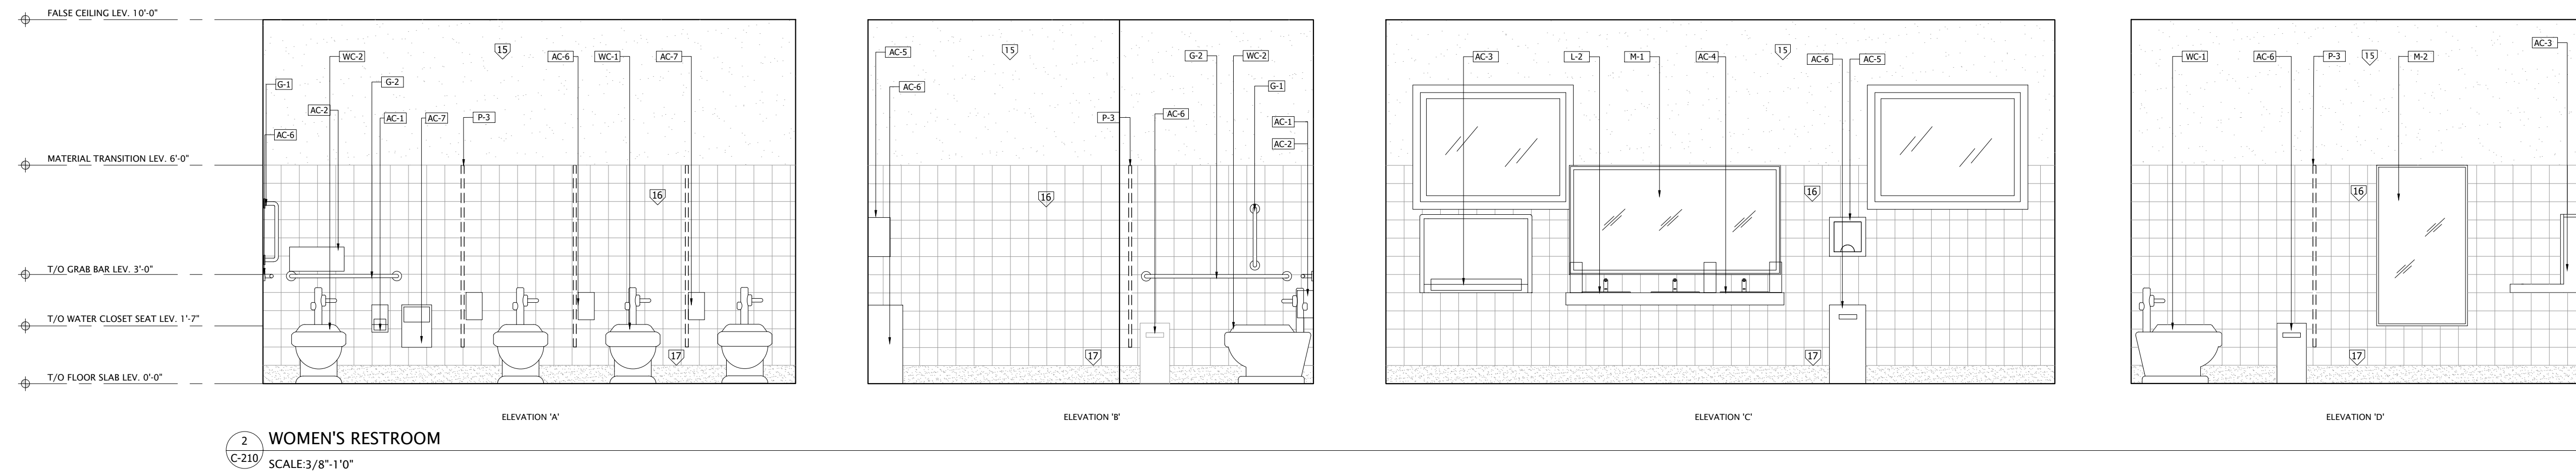

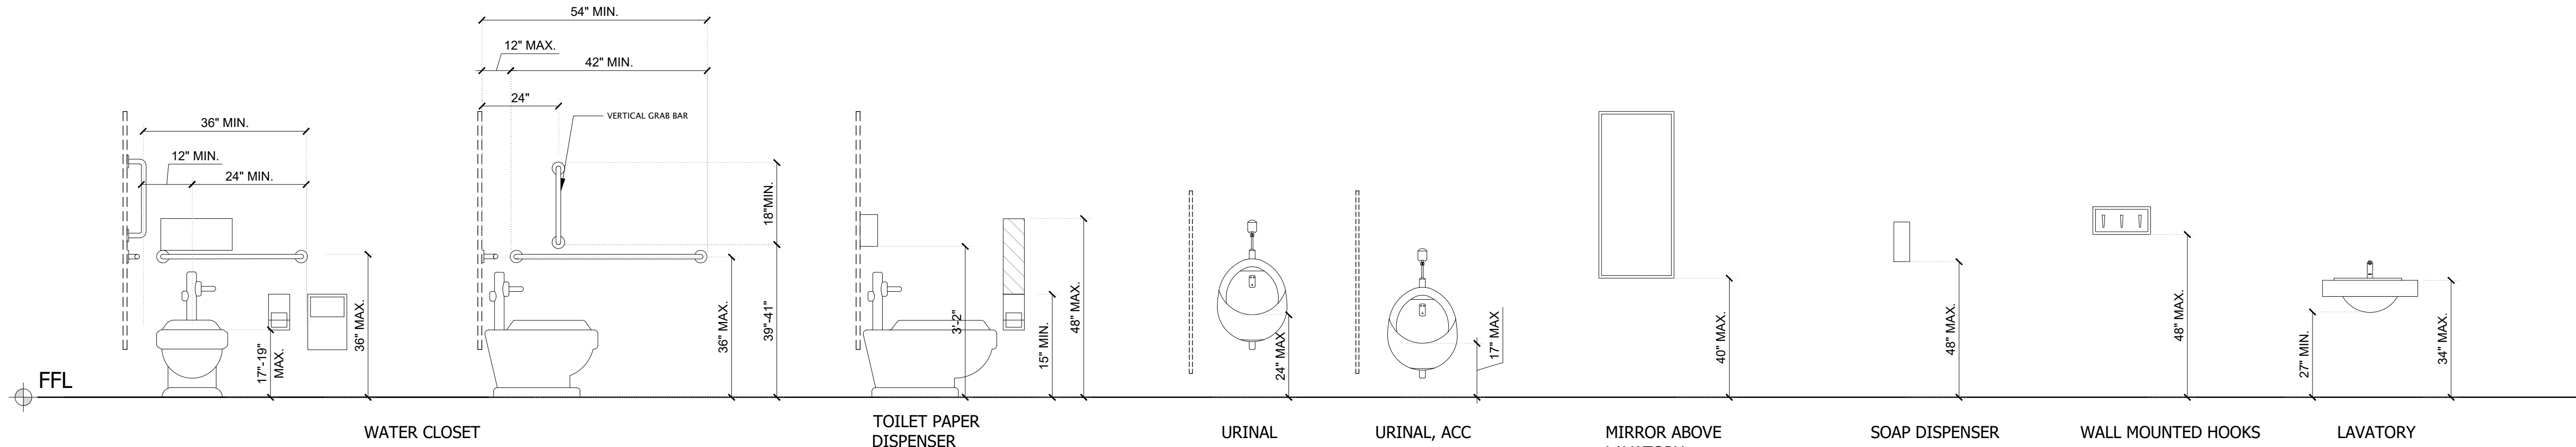

1 MOUNTING HEIGHTS
C-301 SCALE: 1/2" = 1'0"

- NOTE:
- HEIGHT AS PER 2017 ICC A117.1 WITH SUPPLEMENT 1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES, SECTION 602


FITTINGS AND ACCESSORIES SCHEDULE			
S.N.	TAG	ACCESSORY	ITEM SPECIFICATION
1.	AC-1	TOILET PAPER DISPENSER	BOBRICK MODEL: B2888 OR EQUAL
2.	AC-2	TOILET SEAT COVER DISPENSER	KIMBERLY-CLARK MODEL: 09505 OR EQUAL
3.	AC-3	DIAPER CHANGING STATION	ASI MODEL: 10-9012 OR EQUAL
4.	AC-4	SOAP DISPENSER	SAON MODEL: 4034 OR EQUAL
5.	AC-5	HAND DRYER	ASI MODEL: 10-0192-1-93 OR EQUAL
6.	AC-6	PAPER TOWEL DISPENSER W/ TRASH CAN	HARDWARE RESOURCES MODEL: CAN-35GRY OR EQUAL
7.	AC-7	SANITARY NAPKIN DISPENSER	SEACHROME MODEL: SCAL-170 OR EQUAL
8.	AC-8	PAPER TOWEL DISPENSER	ASI MODEL: 10-0210-41 OR EQUAL
9.	AC-9	COMMERCIAL WALL RACK	ROHL MODEL: ROT10APC OR EQUAL
10.	G-1	GRAB BAR VERTICAL	SYSTEM MODEL: 3570.001.10 OR EQUAL
11.	G-2	GRAB BAR HORIZONTAL	POLO MODEL: 0770.001.30 OR EQUAL
12.	G-3	TOWEL BAR	NORM MODEL: WSBC 268610-12 CR OR EQUAL
13.	L-1	LAVATORY TYPE-1	SIMPLE 60.50A MODEL: 60.50A.01 OR EQUAL
14.	L-2	LAVATORY TYPE -2	SLOAN MODEL: ELRF-83000 OR EQUAL
15.	HS-1	HAND SINK -1	SERV-WARE MODEL:HS15-CWP OR EQUAL
16.	M-1	MIRROR TYPE-1	SPECI MODEL:SPECI 5676 OR EQUAL
17.	M-2	MIRROR TYPE-2	Elan Model: 84171 OR EQUAL
18.	M-3	MIRROR TYPE-3	MODO BATH MODEL: T5 T5-R OR EQUAL
19.	MS-1	MOP SINK	PROFLO MODEL: PFMB2424 OR EQUAL
20.	P-1	SS PARTITION WALL UPTO 8'	GLOBAL PARTITIONS MODEL: PCSBW OR EQUAL
21.	P-2	SS PARTITION WALL UPTO 4'-4"	GLOBAL PARTITIONS MODEL: 9SFCSX OR EQUAL
22.	P-3	SS PARTITION WALL UPTO 8'	GLOBAL PARTITIONS MODEL: PCSBW OR EQUAL
23.	S-1	SHOWER HEAD	KOHLER MODEL: K-22170-CP OR EQUAL
24.	U-1	URINAL,STD	TOTO MODEL: UT104E#01 OR EQUAL
25.	U-2	URINAL,ACC	TOTO MODEL: UT104E#01 OR EQUAL
26.	U-3	UTILITY HOOKS	IVES MODEL: 581A92 OR EQUAL
27.	WC-1	WATER CLOSET,STD	SLOAN MODEL: 20231001 OR EQUAL
28.	WC-2	WATER CLOSET,ACC	SLOAN MODEL: 20231001 OR EQUAL
29.	WH-1	WATER HEATER	CYCLONER MXI MODULATING MODEL: BTH-120 MXI OR EQUAL
30.	WF-1	WATER FOUNTAIN	ELKAY MODEL: EZSTL8LC OR EQUAL

MATERIAL AND FINISHES SCHEDULE		LOBBY				SHOWER ROOM				FAMILY RESTROOM				MEN'S RESTROOM				WOMEN'S RESTROOM				UTILITY ROOM				SEATING AREA					
		FLOOR	CEILING	WALL-NORTH	WALL-SOUTH	WALL-EAST	WALL-WEST	FLOOR	CEILING	WALL-NORTH	WALL-SOUTH	WALL-EAST	WALL-WEST	FLOOR	CEILING	WALL-NORTH	WALL-SOUTH	WALL-EAST	WALL-WEST	FLOOR	CEILING	WALL-NORTH	WALL-SOUTH	WALL-EAST	WALL-WEST	FLOOR	CEILING	WALL-NORTH	WALL-SOUTH	WALL-EAST	WALL-WEST
CEILING	EXTERIOR PVC PLANK		X																												
	MOISTURE RESISTANT TILE																				X										
FLOOR	CERAMIC TILE (ANTI SLIP)																														
	SEALED CONCRETE	X																													
WALL	CERAMIC TILE																											X			
	PAINT																														
	EXTERIOR BOARD			X	X	X																									
	BRICK CLADDING																													X	

MATERIALS AND FINISHES LEGEND			
TAG	PRODUCT DESCRIPTION	BRAND / MANUFACTURER	TYPE / COLOR
1	SEALED CONCRETE FLOORING	NA	LIGHT GREY OR APPROVED EQUAL
2	CERAMIC FLOOR TILE (ANTI-SLIP)	TRAFFICMASTER	BAJA GRAY - MATTE FINISH 12" X 12" OR APPROVED EQUAL
4	MOISTURE RESISTANT CEILING TILE	ARMSTRONG	FINE FISSURED - IVORY 24" X 48" OR APPROVED EQUAL
5	FIBER CEMENT BOARD	ALLURA	WHITE 12' X 16" OR APPROVED EQUAL
6	METAL ROOF PANEL	NA	STANDING SEAM - GALVALUME COATED - REGAL BLUE OR APPROVED EQUAL
7	METAL BOX GUTTER WITH DOWNSPOUT	NA	GALVALUME COATED - BLACK POWDER COATED FINISH OR APPROVED EQUAL
8	METAL FASCIA TRIM BOARD	NA	REGAL BLUE OR APPROVED EQUAL
9	EXTERIOR FIBER CEMENT PANEL SIDING	JAMES HARDIE	CEDARMILL TEXTURE - PTD TO SILVER HERRING OR APPROVED EQUAL
10	EXTERIOR FIBER GLASS COLUMN WRAP	RESINART	DURACRAFT - WHITE OR APPROVED EQUAL
11	BRICK MASONRY ANCHORED CLADDING	BRICKWORKS GLEN-GERY	MOUNTAIN SHADOW SMOOTH OR APPROVED EQUAL
12	EXTERIOR FIBER CEMENT TRIM	JAMES HARDIE	SMOOTH TEXTURE - PRIMED FINISH - PTD TO SW - EXTRA WHITE OR APPROVED EQUAL
13	METAL SOFFIT (PERFORATED)	NA	REGAL BLUE OR APPROVED EQUAL
14	EXTERIOR FIBER CEMENT ARTISAN SIDING	JAMES HARDIE	V-GROOVE - PRIMED FINISH - PTD TO SW - OLYMPUS WHITE OR APPROVED EQUAL
15	INTERIOR LATEX WALL PAINT	SHERWIN WILLIAMS	SW-1668 (PINEAPPLE CREAM) OR APPROVED EQUAL
16	CERAMIC WALL TILE	DALTILE	GLACIER WHITE - GLOSSY FINISH 6" X 6" OR APPROVED EQUAL
17	RUBBER COVE BASE	ROPPE	PINNACLE DARK GRAY MATTE - 6" OR APPROVED EQUAL

MATERIALS AND FINISHES NOTES:

- A. ROOF COVERING MATERIAL TO BE A, B OR C CLASSIFICATION PER NCBC SECTION 603.1.
- B. THERMAL AND ACOUSTIC INSULATION TO HAVE A FLAME SPREAD INDEX NOT MORE THAN 25, PER NCBC SECTION 603.1.
- C. INTERIOR FINISHES COMPLIANCE AS PER NCBC CHAPTER 8:
1. ALL INTERIOR WALLS AND CEILING FINISHES SHALL BE CLASS-C WITH FLAME SPREAD INDEX RANGE 76-200 AND SMOKE DEVELOPED INDEX RANGE 0-450. (SECTION 803.1.1.)
2. ALL INTERIOR FLOOR FINISHES AND WALL-BASE FINISHES SHALL BE CLASS-II, 0.22 WATTS/SQ.CM. MINIMUM CRITICAL RADIANT FLUX. (SECTION 804.2, 806.8)

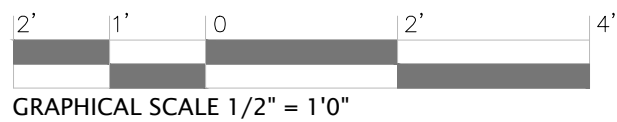

RESTROOMS

CAROLINA MURUGAN TEMPLE - PHASE 1

CLIENT: CAROLINA MURUGAN TEMPLE

100 MURUGAN CIR, MONCURE, NC 27559

DATE: 6/13/2025

SSN JOB ID: 1021-02-2024

DESIGNED BY: MK

DRAWN BY: BM

CHECKED BY: MK

REVIEWED BY: MN



#	REVISIONS	DATE
1	REV-1	6/11/2025

FINISHES, FITTINGS AND ACCESSORIES SCHEDULE


C - 301

DOOR AND WINDOW SCHEDULE


DOOR NO.	NO. OF DOORS	DOOR			PANEL		FRAME			HARDWARE
		W.	H.	T.	MAT'L	TYPE	MAT'L	TYPE	FINISH	
D1	4	3'-0"	7'-0"	0'-1 $\frac{3}{4}$ "	STL	P1	HM	DF1	PTD - PTM1	SATIN CHROME FINISH
D2	1	3'-6"	8'-0"	0'-1 $\frac{3}{4}$ "	STL	P2	HM	DF2	PTD - PTM1	SATIN CHROME FINISH
WINDOW NO.	NO. OF WINDOWS	WINDOW				FRAME			HARDWARE	
		W.	H.	T.	MAT'L	TYPE	MAT'L	TYPE	FINISH	(FIXED GLASS WINDOW HARDWARE PER MANUFACTURER'S REQUIREMENTS)
W1	2	2'-6"	3'-0"	0'-2"	GLASS	W1	ALUM	W1	POWDER COATED	
W2	4	4'-0"	3'-0"	0'-2"	GLASS	W2	ALUM	W2	POWDER COATED	

NOTES


- A. REFER TO FLOOR PLANS FOR LOCATION OF DOORS AND WINDOWS.
- B. ALL WINDOWS AND DOORS SHALL BE SECURELY SHIMMED INTO ROUGH OPENINGS AND SHALL BE TRUE TO LINE, LEVEL, AND PLUMB.
- C. WINDOW HEIGHT SHALL BE SET AT THE SAME HEIGHT THROUGHOUT, FOR PROPER TRIM ALIGNMENT, UNO.
- D. ALL WINDOW FRAMES TO BE POWDER COAT FINISHED TO BLACK OR APPROVED EQUAL.
- E. ALL DOOR FRAMES TO BE PAINTED BLACK (PTM1) OR APPROVED EQUAL.
- F. JAMB WIDTH VARIES. COORDINATE WITH WALL WIDTH AS SHOWN ON FLOOR PLAN.

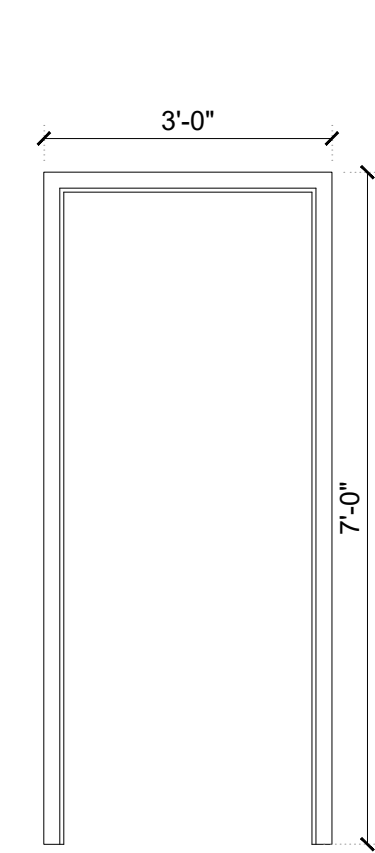


DOOR FRAME TYPE: DF1

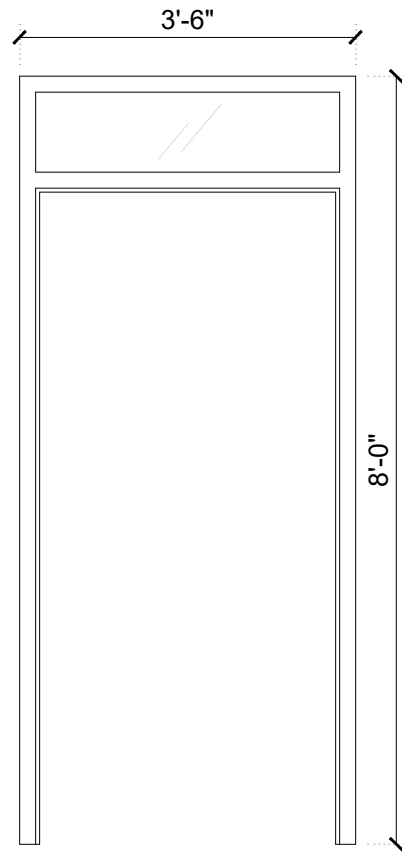


DOOR FRAME TYPE: DF2

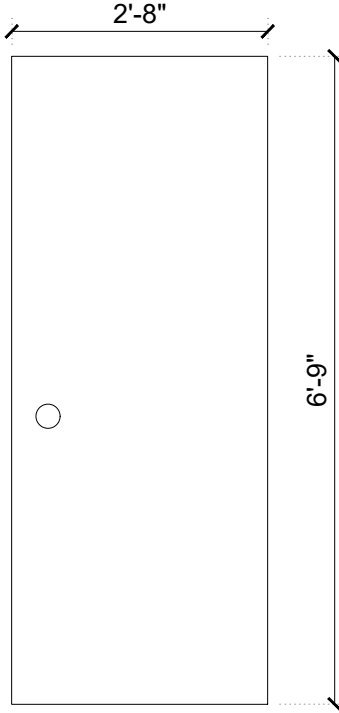


PANEL TYPE: P1

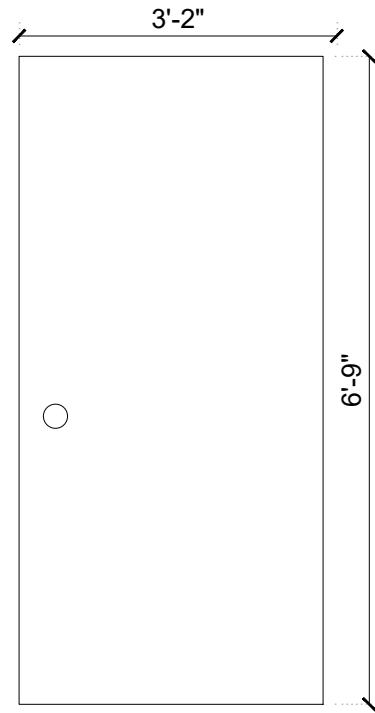


PANEL TYPE: P2

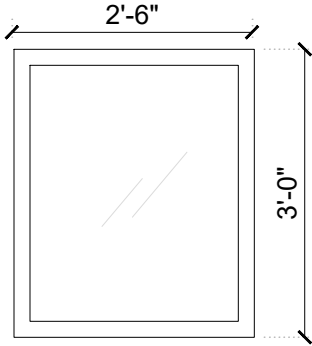

FIXED WINDOW TYPE: W1

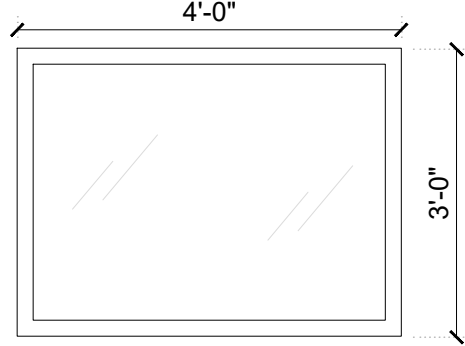

FIXED WINDOW TYPE: W2

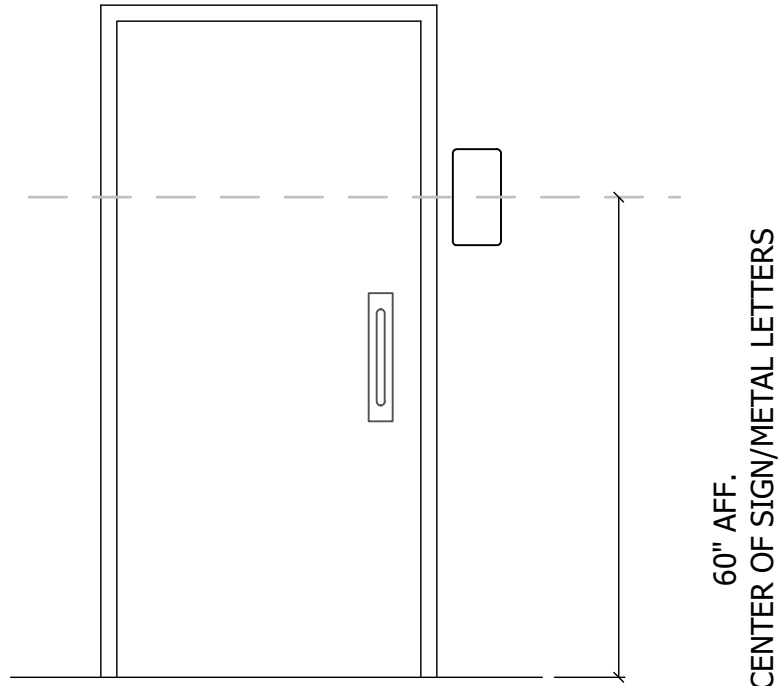

ROOM SIGNS

DOOR FRAME TYPES
SCALE: 1/2"=1'-0"

DOOR PANEL TYPES
SCALE: 1/2"=1'-0"


WINDOW FRAME TYPES
SCALE: 1/2"=1'-0"

PARTITION SCHEDULE


PARTITION WALL TYPE	DESCRIPTION
A1	3 5/8" METAL STUD WITH ONE LAYER OF 5/8" CEMENTITIOUS BACKER BOARD AND CERAMIC TILE UPTO 72" FROM FFL (UNO ON INTERIOR ELEVATIONS) AND PAINTED FINISH ABOVE, ON BOTH SIDE.
A2	3 5/8" METAL STUD WITH ONE LAYER OF 5/8" GYPSUM WALLBOARD WITH PAINTED FINISH ON ONE SIDE AND 5/8" CEMENTITIOUS BACKER BOARD WITH CERAMIC TILE UPTO 72" FROM FFL (UNO ON INTERIOR ELEVATIONS) AND PAINTED FINISH ABOVE, ON OTHER SIDE
B1	6" METAL STUD WITH ONE LAYER OF 5/8" CEMENTITIOUS BACKER BOARD AND CERAMIC TILE UPTO 72" FROM FFL (UNO ON INTERIOR ELEVATIONS) AND PAINTED FINISH ABOVE, ON ONE SIDE AND OTHER SIDE WITH EXTERIOR SHEATHING WITH BRICK CLADDING UPTO BOTTOM OF WINDOW OPENING AND REMAINING HEIGHT OF WALL WITH EXTERIOR SIDING PANEL
B2	6" METAL STUD WITH ONE LAYER OF 5/8" GYPSUM WALLBOARD WITH PAINTED FINISH ON ONE SIDE AND OTHER SIDE WITH EXTERIOR SHEATHING WITH BRICK CLADDING UPTO 5' AND REMAINING HEIGHT OF WALL WITH EXTERIOR SIDING PANEL
B3	6" METAL STUD WITH ONE LAYER OF 5/8" CEMENTITIOUS BACKER BOARD AND CERAMIC TILE UPTO 72" FROM FFL (UNO ON INTERIOR ELEVATIONS) AND PAINTED FINISH ABOVE, ON ONE SIDE AND EXTERIOR SHEATHING WITH EXTERIOR SIDING PANEL ON OTHER SIDE

PARTITION NOTES


- A. EXTEND ALL PARTITION WALLS 10" MIN. ABOVE FALSE CEILING.
- B. PROVIDE ABUSE-RESISTIVE GYPSUM BOARD AND PROVIDE ALL GYPSUM DRYWALL PARTITIONS WITH 3 1/2" SOUND ATTENUATION BATTS.
- C. PROVIDE 5/8" THICK GYPSUM BOARD, UNO.
- D. PROVIDE CONTROL JOINTS AT DRYWALL PARTITIONS LONGER THAN 30 FEET FOR STRAIGHT AND CONTINUOUS WALLS, AND AT OPENING LOCATIONS. WHERE NOT SPECIFICALLY INDICATED ON THE DRAWINGS, CONTRACTOR TO SUBMIT PROPOSED CONTROL JOINT LOCATIONS TO ENGINEER FOR APPROVAL.
- E. PROVIDE 1/2" WIDE SOFT JOINT AT ALL INTERSECTION OF INTERIOR PARTITIONS WITH EXTERIOR WALLS.
- F. DO NOT PLACE MECHANICAL AND/OR ELECTRICAL DEVICES BACK TO BACK IN SOUND BARRIER PARTITIONS. ALL DEVICES TO BE PLACED IN SEPARATE STUD SPACES WITH MINIMUM OF 8" SEPARATION.
- G. PROVIDE PERIMETER SOUND SEAL BETWEEN DUCT AND WALL FRAME ON BOTH SIDES OF PARTITION WALLS WHERE DUCT PENETRATES THROUGH SOUND BARRIER PARTITION WALLS.
- H. PROVIDE CEMENTITIOUS BACKER BOARD OR EQUAL AS THE SUBSTRATE TO RECEIVE CERAMIC TILE.
- I. PROVIDE WATER RESISTANT GYPSUM BOARD OR EQUAL AS THE SUBSTRATE WHERE GYPSUM BOARD IS ADJACENT OR EXPOSED TO HUMID CONDITIONS. PROVIDE THE SUBSTRATE TO RECEIVE HIGH PERFORMANCE PAINT FINISHES. ALL RESTROOM AND KITCHEN INTERIOR WALLS ARE CONSIDERED TO BE HUMID SPACES.
- J. FINISH ALL EXPOSED GYPSUM BOARD CONSTRUCTION. ALL EXPOSED GYPSUM BOARD SHALL BE TAPED, FLOATED AND SANDED SMOOTH TO REMOVE ALL INDICATION OF THE JOINT WITH A VISUAL INSPECTION. FINISH WALL IN ACCORDANCE WITH THE ROOM FINISH SCHEDULE.
- K. PROVIDE 20 GAUGE METAL BLOCKING OR MANUFACTURER RECOMMENDED ATTACHMENT FOR WALL MOUNTED HARDWARE AND TOILET ACCESSORIES.
- L. PROVIDE SOUND ATTENUATION BATTS ABOVE CEILING 4'-0" WIDE ON BOTH SIDES OF WALL.

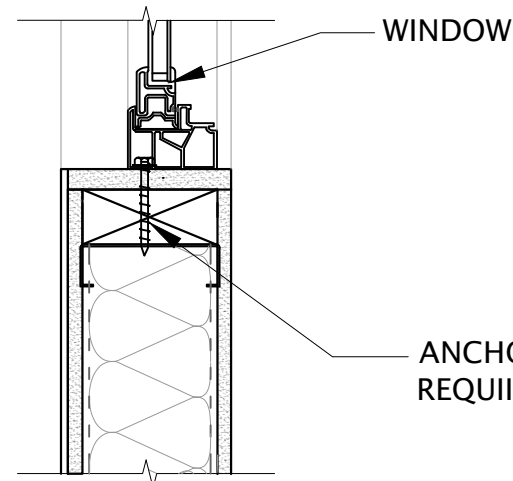


DETAIL- WINDOW (HEAD/JAMB)
SCALE: NA

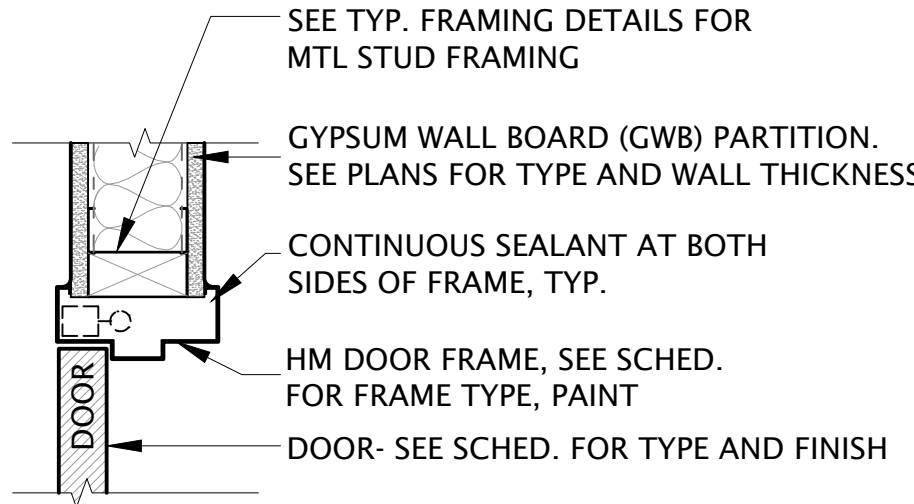


TYP. HM DOOR HEAD
SCALE: NA

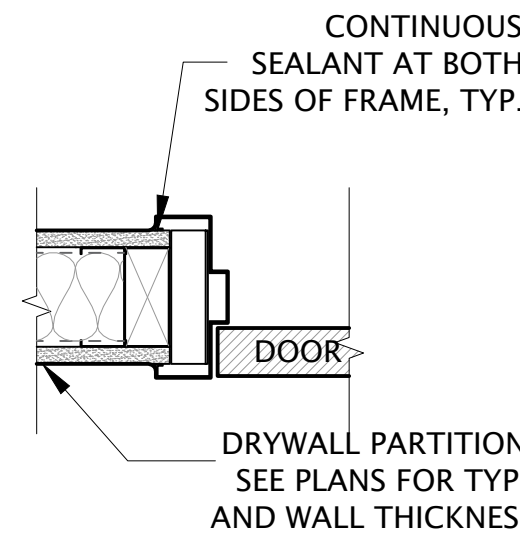


TYP. HM DOOR JAMB
SCALE: NA

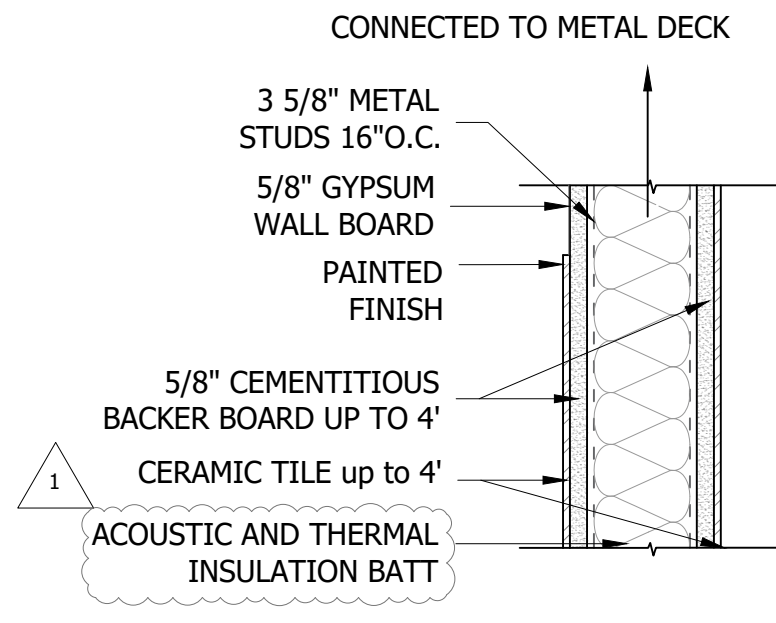


4" PARTITION WALL TYPE A3
SCALE: NTS

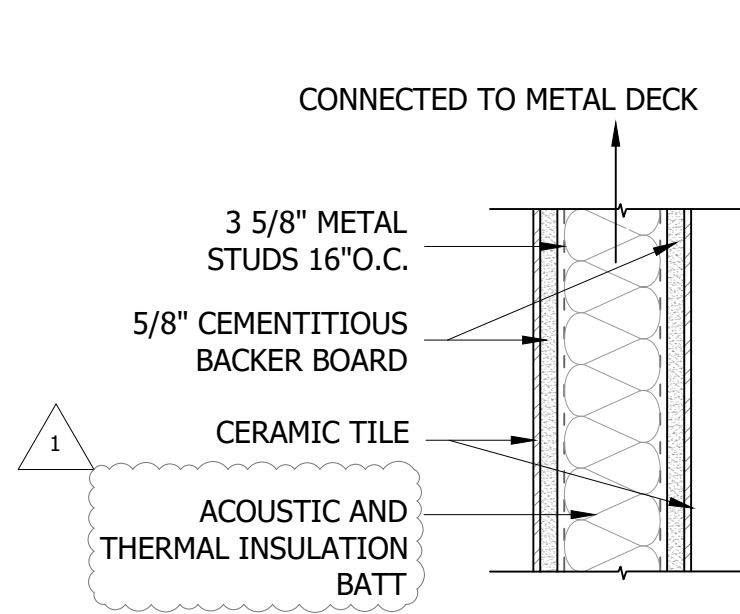


4" PARTITION WALL TYPE A1
SCALE: NTS

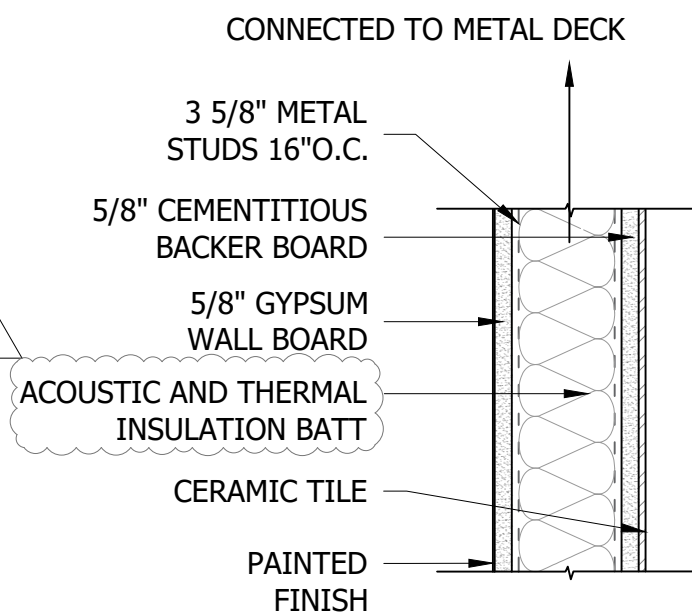


4" PARTITION WALL TYPE A2
SCALE: NTS

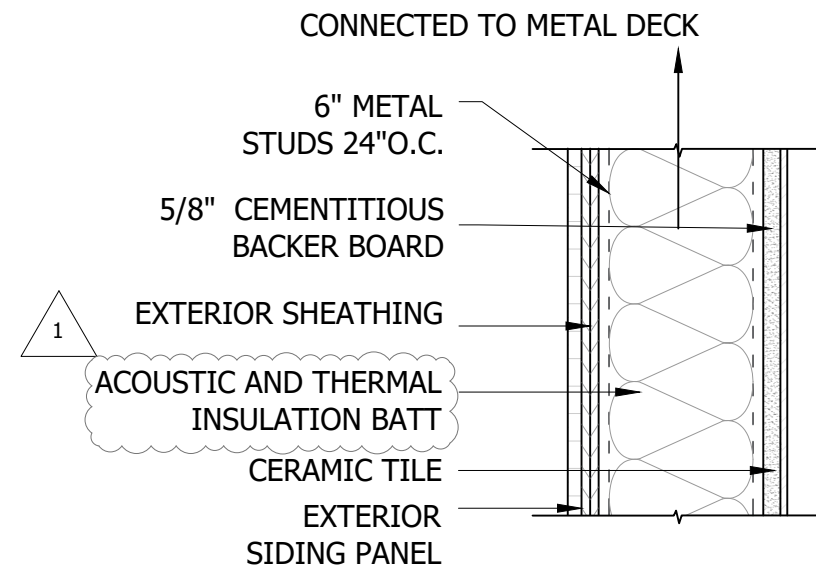

6" PARTITION WALL TYPE B3
SCALE: NTS

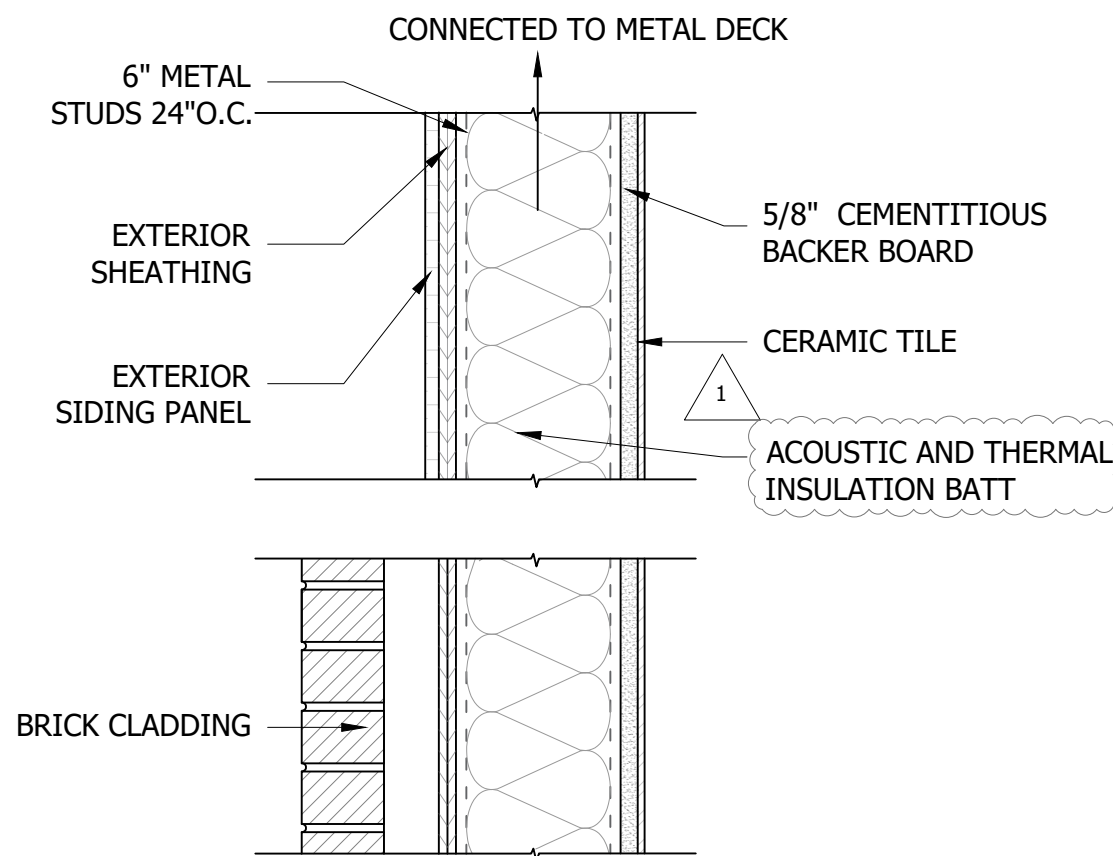

6" PARTITION WALL TYPE B1
SCALE: NTS

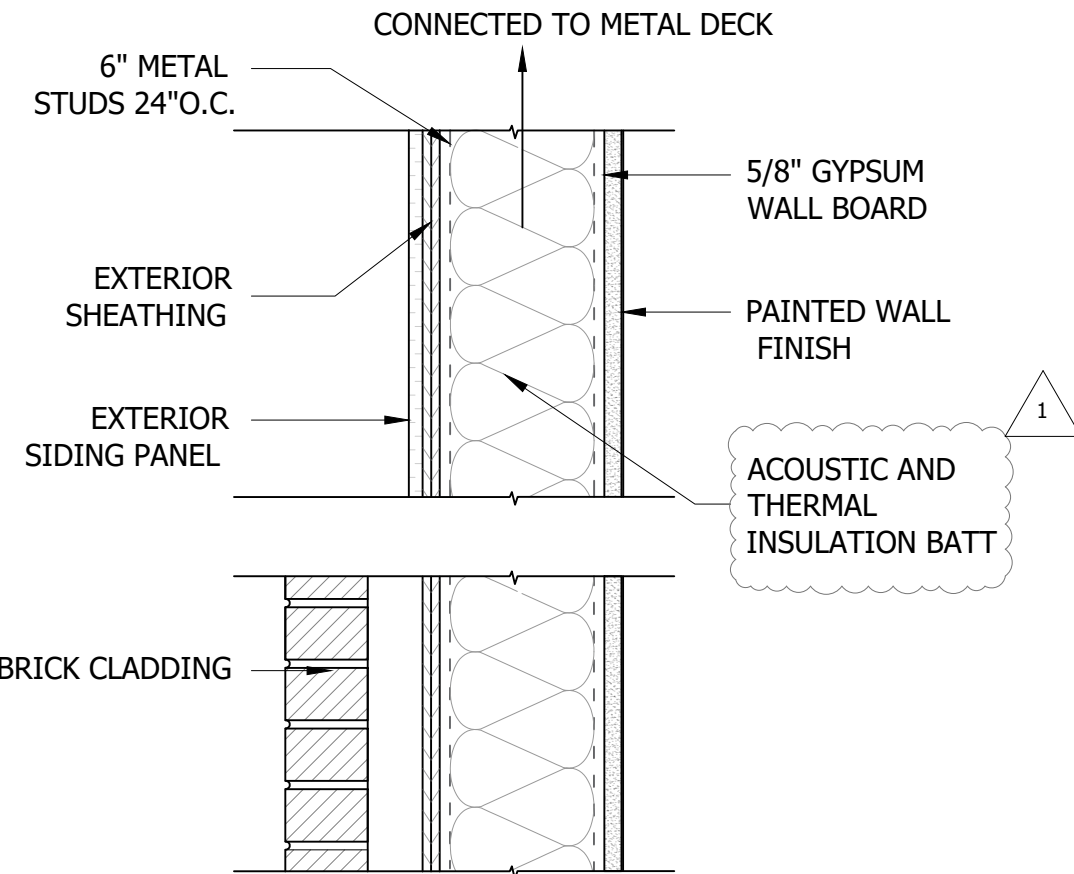

6" PARTITION WALL TYPE B2
SCALE: NTS

RESTROOMS

CAROLINA MURUGAN TEMPLE - PHASE 1

CLIENT: CAROLINA MURUGAN TEMPLE
100 MURUGAN CIR, MONCURE, NC 27559


DATE: 6/13/2025
SSN JOB ID: 1021-02-2024
DESIGNED BY: MK
DRAWN BY: BM
CHECKED BY: MK
REVIEWED BY: MN



#	REVISIONS	DATE
1	REV-1	6/11/2025


DOOR AND WINDOW DETAILS AND
PARTITION TYPE DETAILS

C - 302

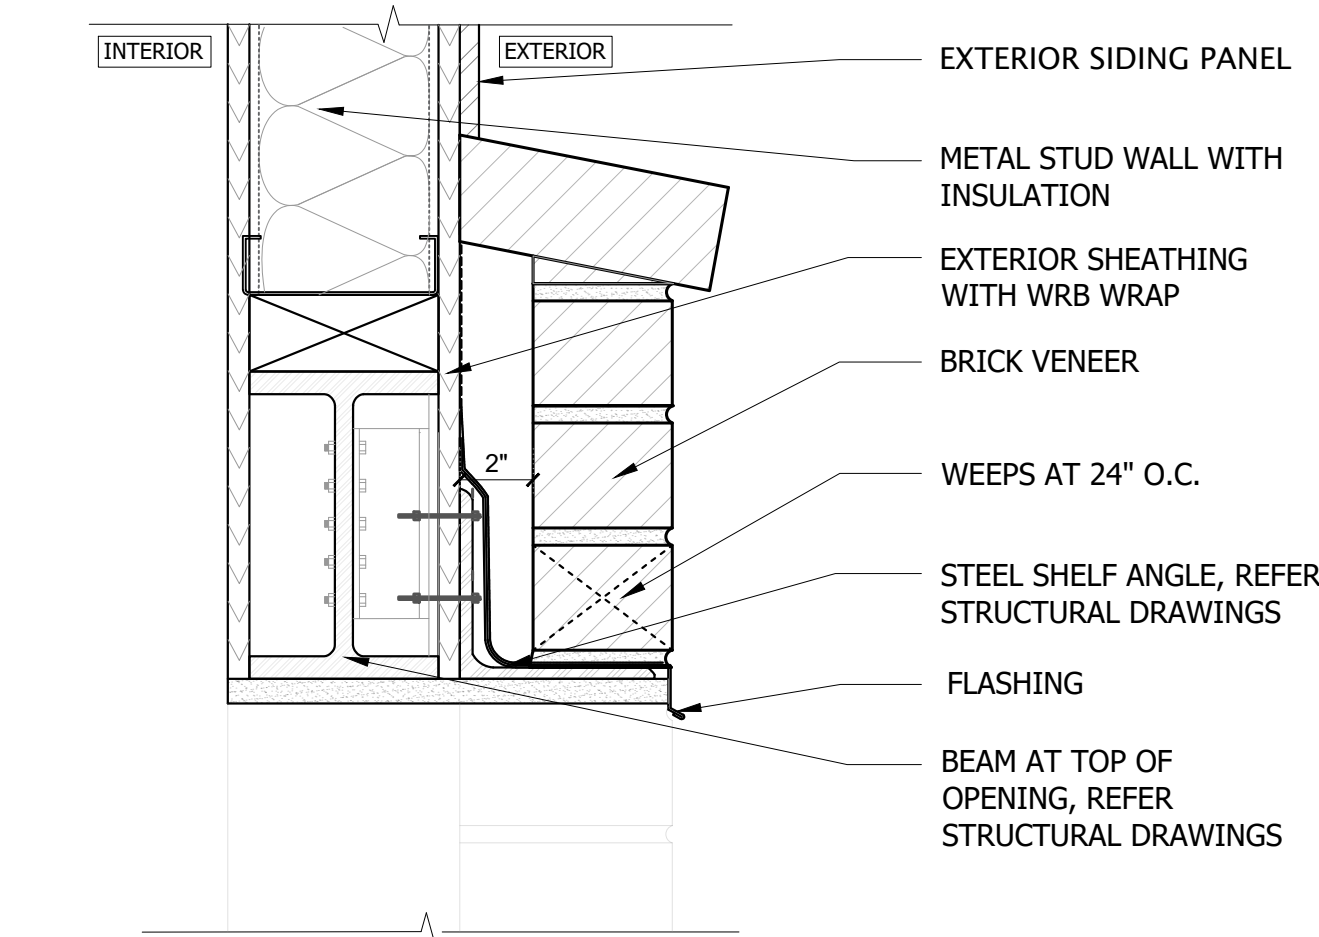


1 OPENING HEAD @ METAL STUD-BRICK
C-303 SCALE: NTS

NOTE:
1. APPLY WATER RESISTIVE BARRIER OVER EXTERIOR SHEATHING.

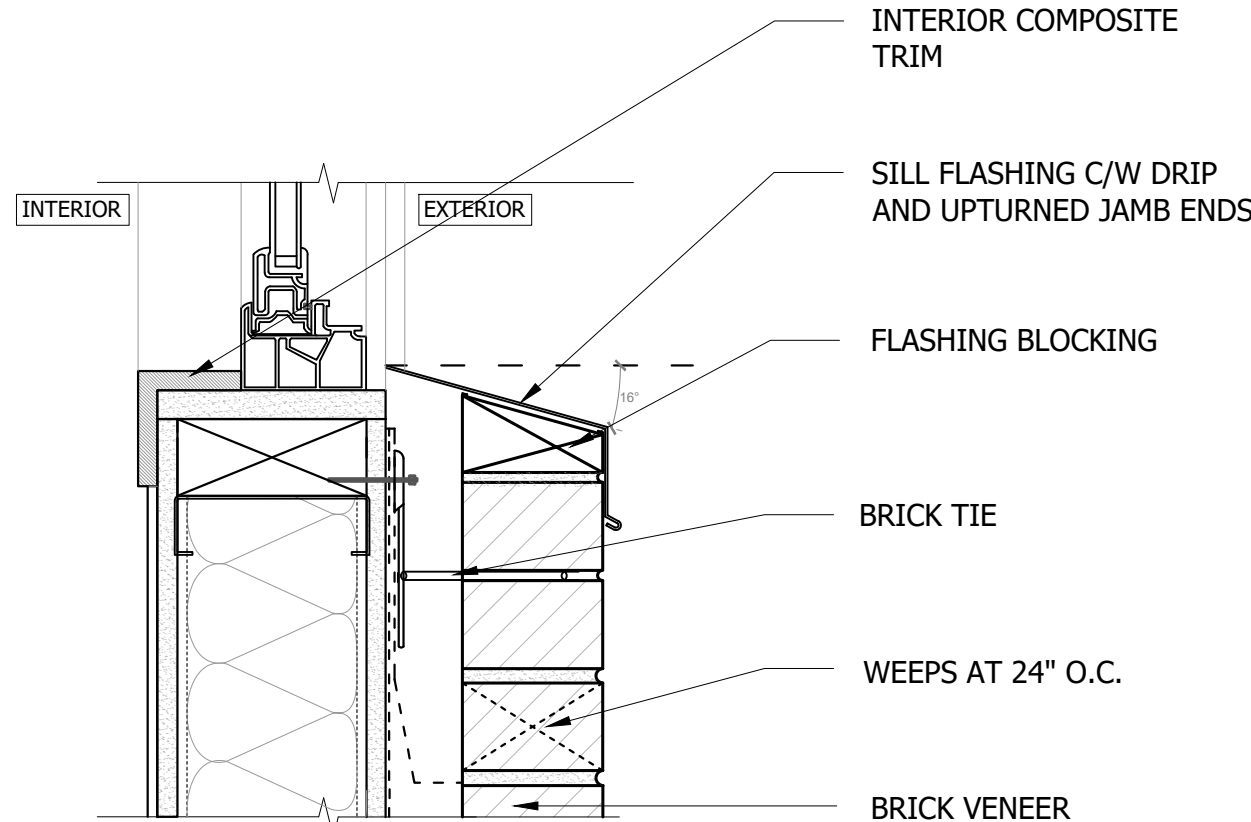


2 WINDOW SILL @ METAL STUD-BRICK
C-303 SCALE: NTS

NOTES:
1. ALL EXTERIOR PENETRATIONS AND INTERFACES BETWEEN DIFFERENT MATERIALS SHALL BE FLASHED AND/OR CAULKED OR OTHERWISE DETAILED TO DIRECT WATER TO THE EXTERIOR AND IN ACCORDANCE WITH THE ACCEPTED INDUSTRY PRACTICES.
2. ALL FLASHING AND MOISTURE PROTECTION ELEMENTS SHALL LAP TO DIRECT WATER TOWARDS THE EXTERIOR OF THE BUILDING.

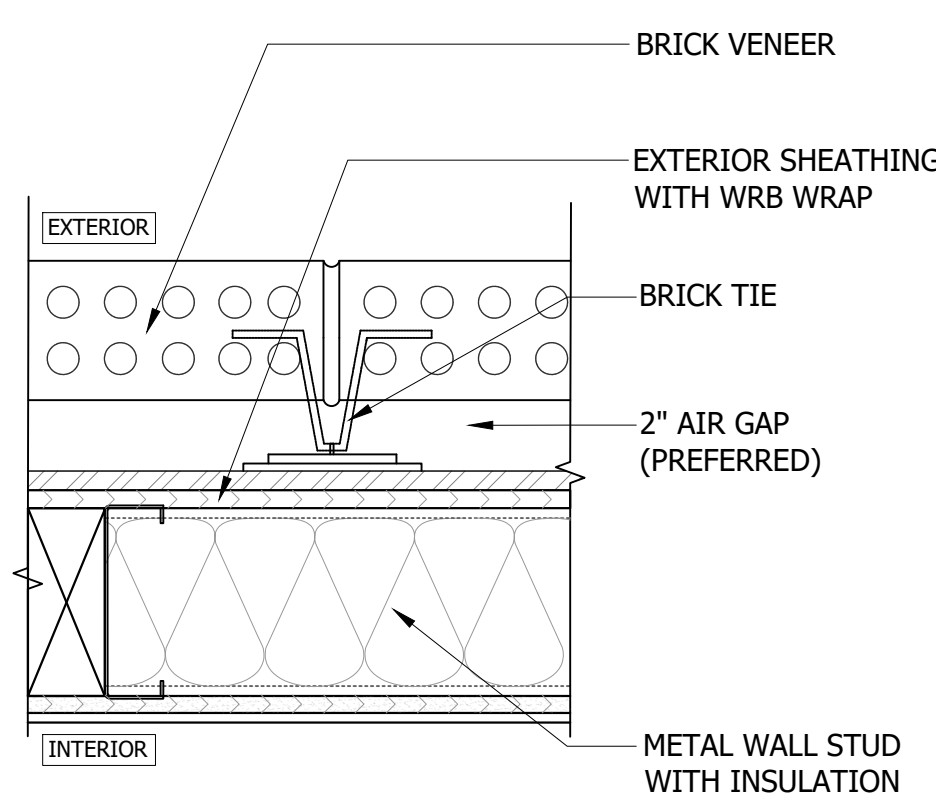


3 WINDOW JAMB AT METAL STUD-F.C. GYPSUM BOARD
C-303 SCALE: NTS

NOTES:
1. PROVIDE 6" MIN. SELF-ADHERING FLASHING LAPPED OVER WINDOW FLANGE AND WATER RESISTIVE BARRIER.
2. PROVIDE CONTINUOUS INTERIOR SEALANT AT ALL WINDOWS, TYP.
3. AN AIR GAP OF MIN. 1" TO BE PROVIDED BETWEEN THE BRICK VENEER AND EXTERIOR SHEATHING.

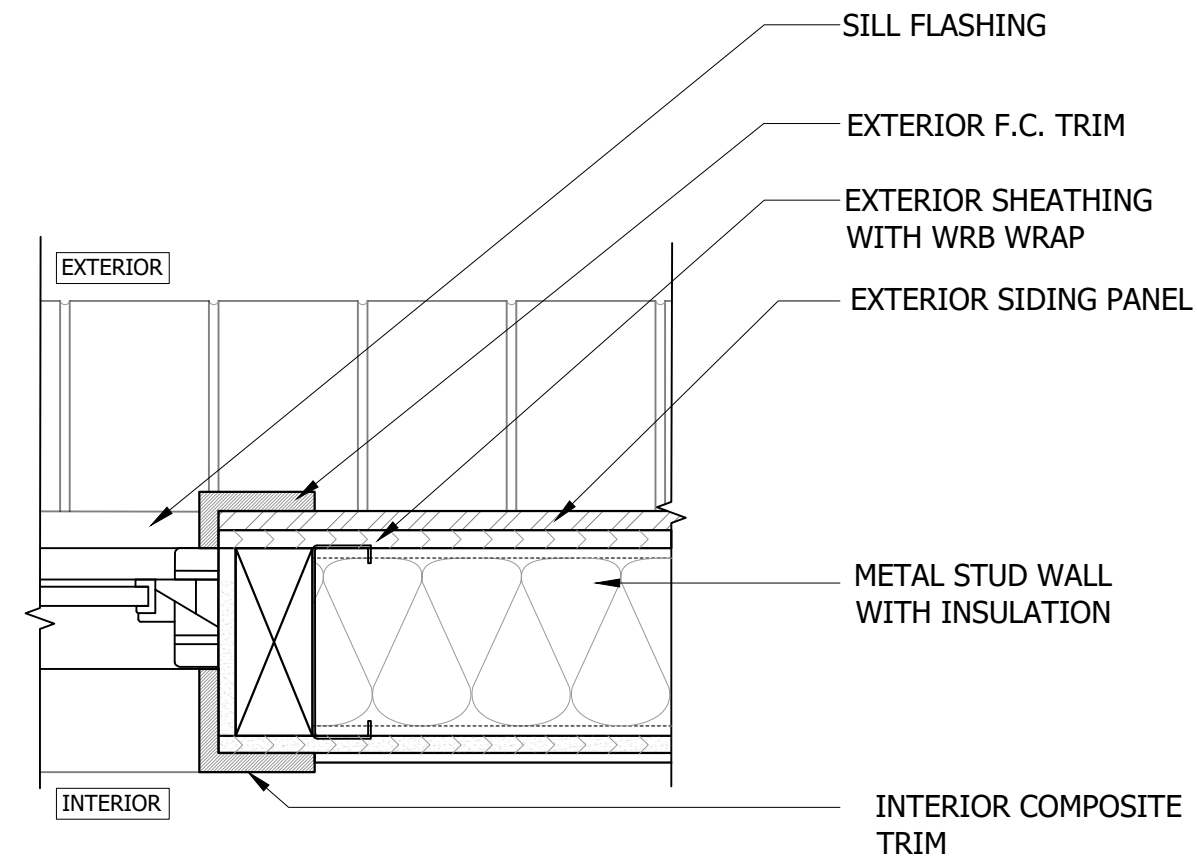


4 WINDOW JAMB AT METAL STUD-F.C. PANEL WITH TRIM
C-303 SCALE: NTS

NOTE:
1. PROVIDE 6" MIN. SELF-ADHERING FLASHING LAPPED OVER WINDOW FLANGE AND WATER RESISTIVE BARRIER.

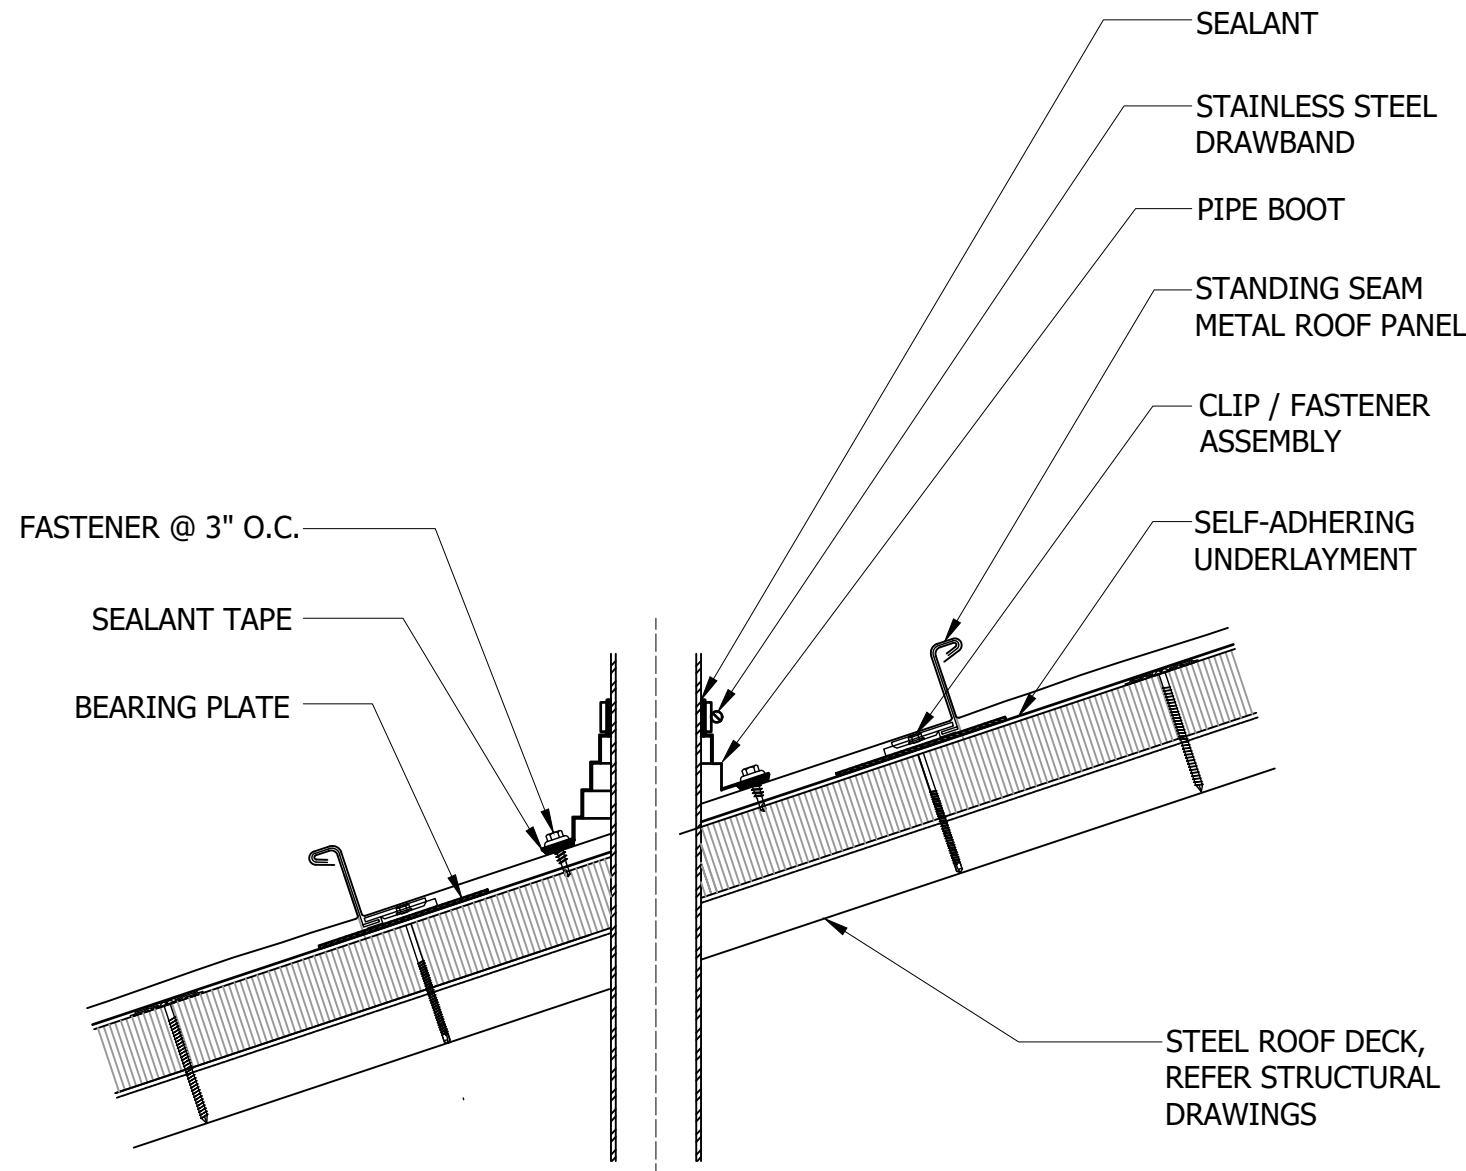


5 PIPE PENETRATION DETAIL
C-303 SCALE: NTS


NOTE:
1. RELOCATE PIPE PENETRATION TO CENTER OF PANEL TO PROVIDE PIPE BOOT. ALTERNATIVELY, PROVIDE FLAT CURB ACROSS TWO PANELS TO PROVIDE PIPE BOOT FLASHING WITHOUT INTERFERENCE WITH STANDING SEAM METAL ROOF PANEL SEAM.

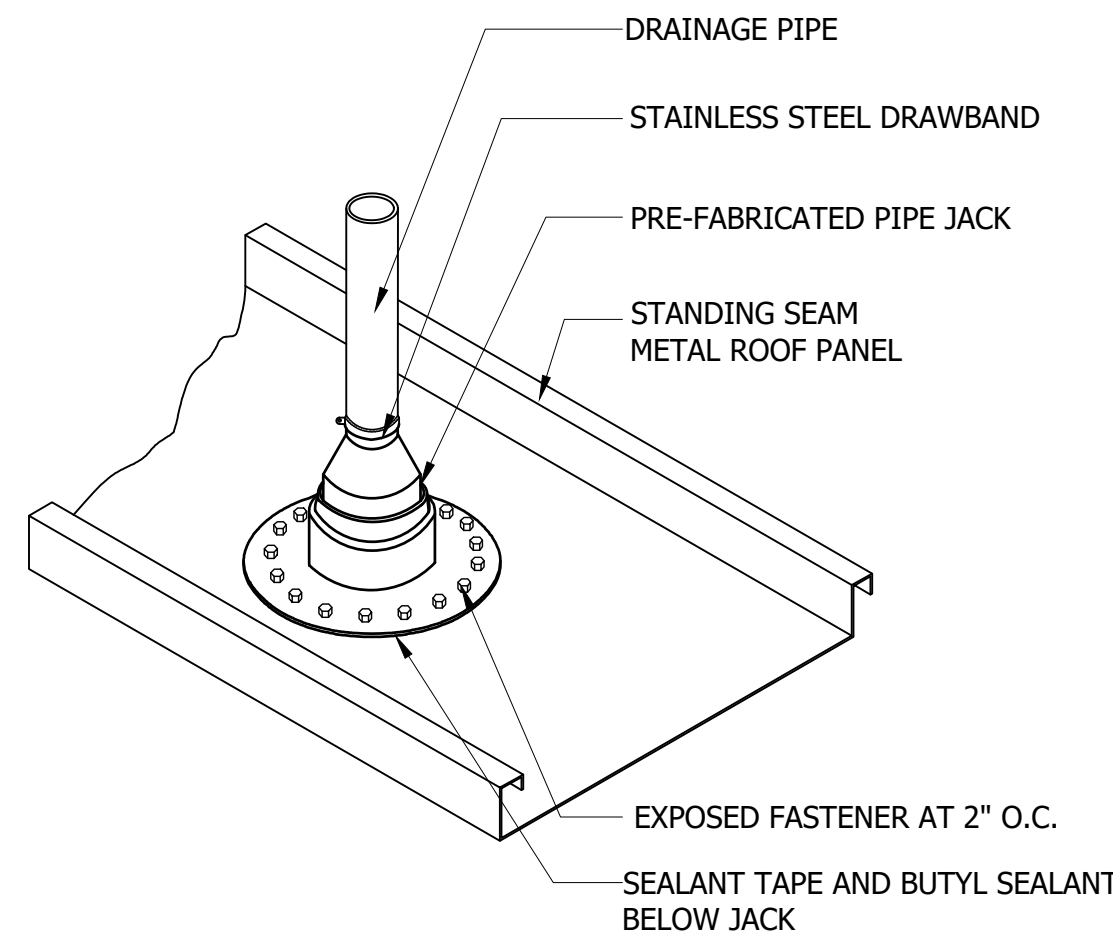

6 PIPE PENETRATION
C-303 SCALE: NTS

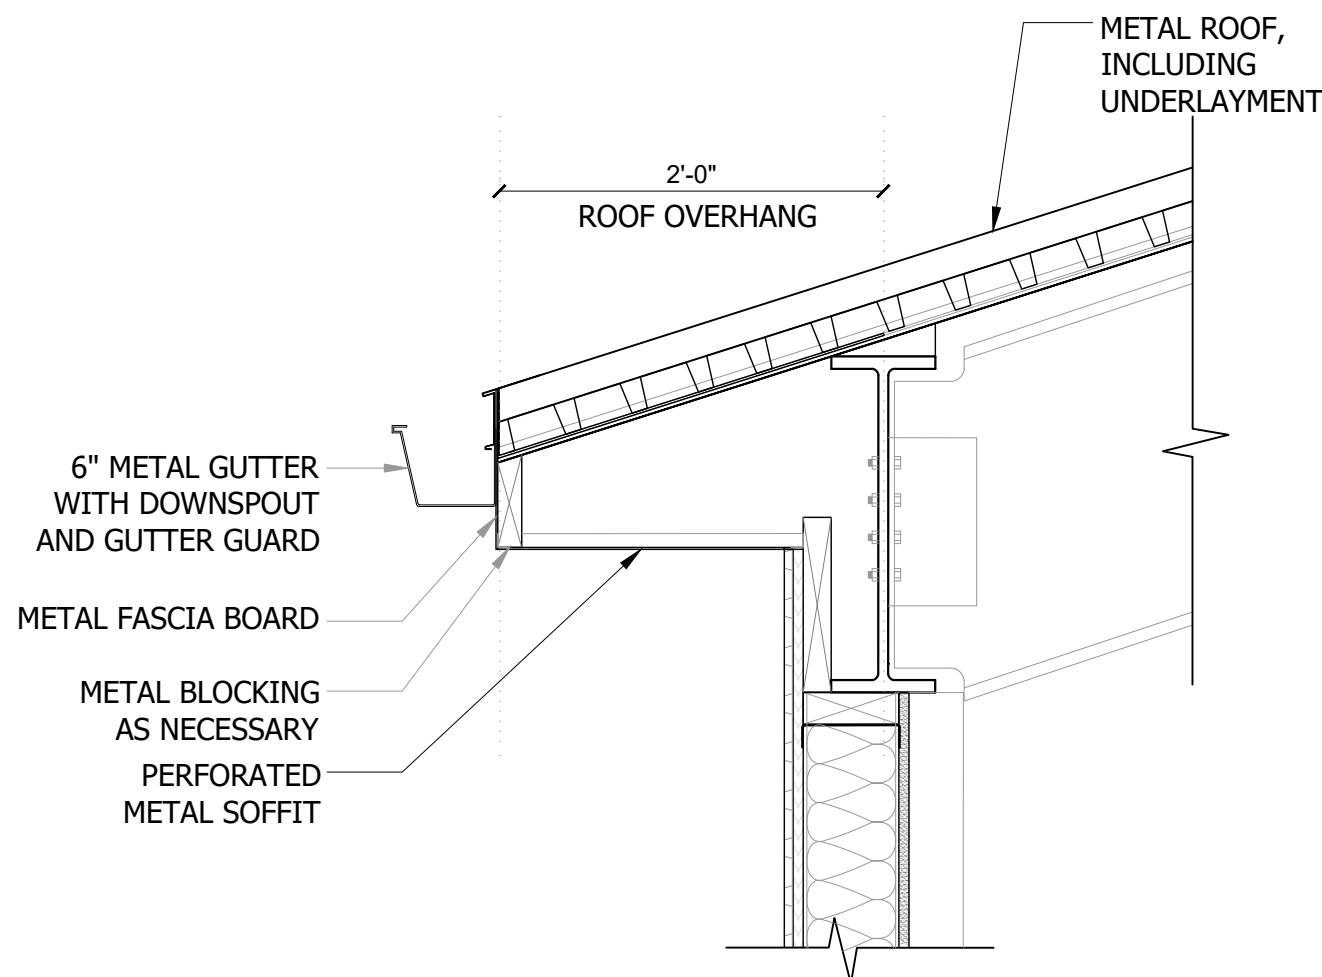

7 ROOF EDGE DETAIL
C-303 SCALE: NTS

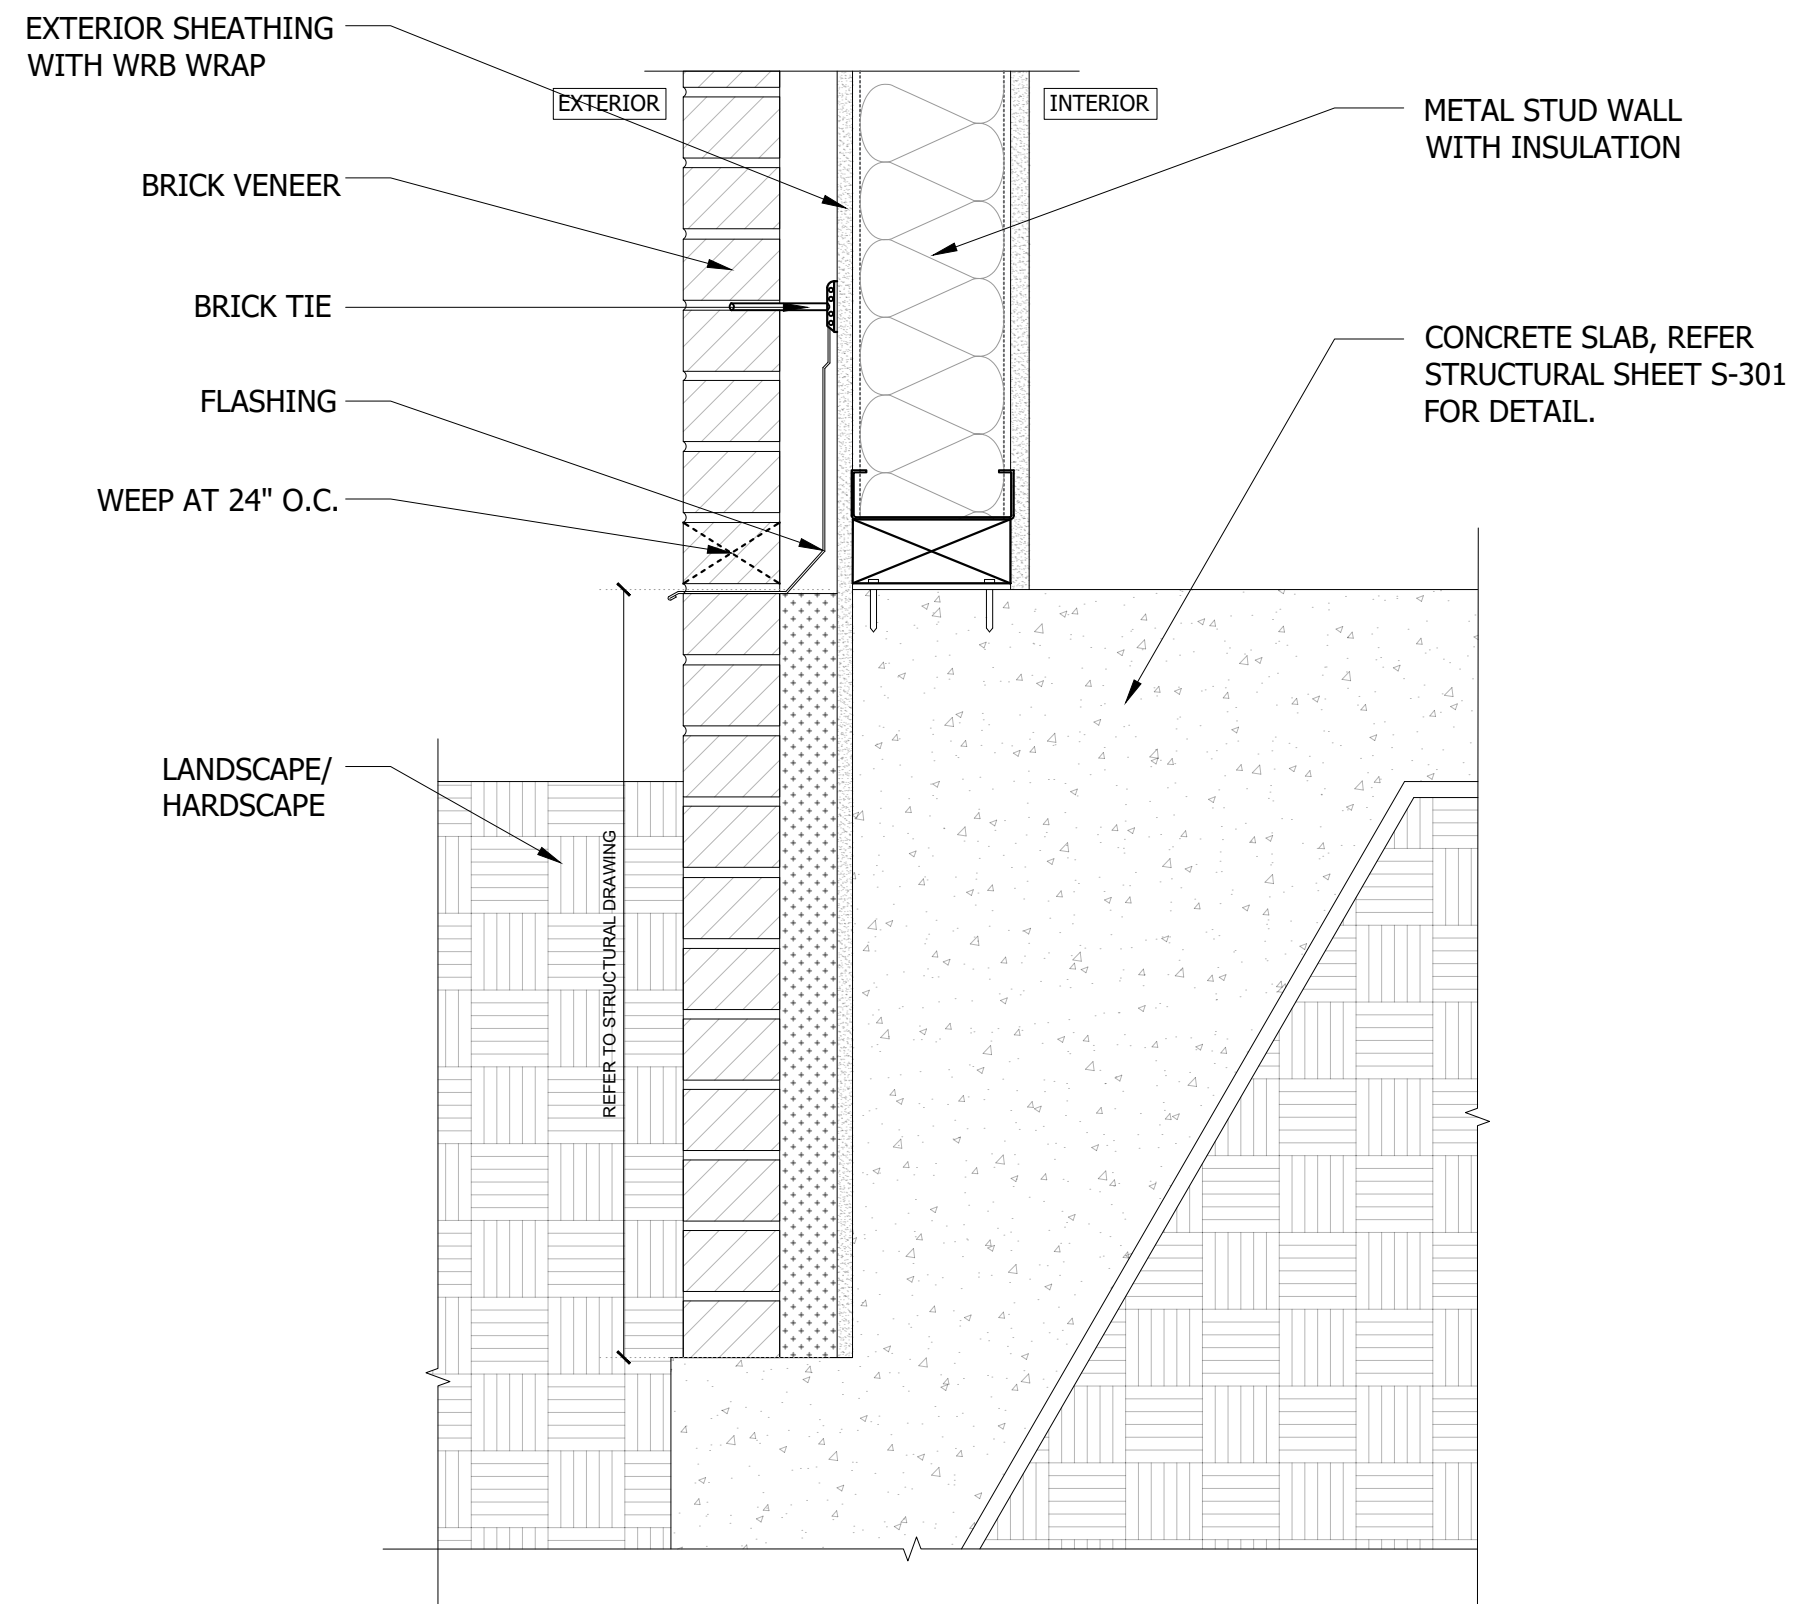

8 BRICK LEDGE DETAIL
C-303 SCALE: NTS

RESTROOMS
CAROLINA MURUGAN TEMPLE - PHASE 1
CLIENT: CAROLINA MURUGAN TEMPLE
100 MURUGAN CIR, MONCURE, NC 27559

DATE: 6/13/2025
SSN JOB ID: 1021-02-2024
DESIGNED BY: MK
DRAWN BY: MS
CHECKED BY: MK
REVIEWED BY: MN



#	REVISIONS	DATE

TYPICAL DETAILS

C - 303