

STANDARD ABBREVIATIONS

@	- AT	GA	- GAUGE	QT	- QUARRY TILE
ACT	- ACOUSTIC CEILING TILE	GALV	- GALVANIZED	QTY	- QUANTITY
ADD'N	- ADDITION	GC	- GENERAL CONTRACTOR		
ADJ	- ADDITIONAL	GDW	- GYPSUM DRY WALL	R OR RAD	- RADIUS
ADJ	- ADJACENT	GYP BD	- GYPSUM WALL BOARD	RD	- ROOF DRAIN
AFF	- ABOVE FINISH FLOOR			REF	- REFERENCE
AL	- ALUMINUM	HL	- HOSE BIB	REINF	- REINFORCING
ALT	- ALTERNATE	HDW	- HARDWARE	REQ'D	- REQUIRED
APPROX	- APPROXIMATE	HDWRE	- HARDWARE	REV	- REVERSED
AUTO	- AUTOMATIC	HGT	- HEIGHT	RFG	- ROOFING
		HM	- HOLLOW METAL	RH	- RIGHT HAND
BLDG	- BUILDING	HORIZ	- HORIZONTAL	RLC	- RECESSED LOCKABLE CABINET
BRG	- BEARING	HVAC	- HEATING / VENTILATING / AIR CONDITIONING	RM	- ROOM
BSMT	- BASEMENT			RO	- ROUGH OPENING
BTM	- BOTTOM	ID	- INSIDE DIAMETER		
BTWN	- BETWEEN	IN	- INCH	SCHED	- SCHEDULE
		INSUL	- INSULATION OR INSULATING	SF	- SQUARE FOOT
CAB	- CABINET	INT	- INTERIOR	SHT	- SHEET
CB	- CHALK BOARD	INV	- INVERT	SI	- SQUARE INCH
CG	- CORNER GUARD			SIM	- SIMILAR
CFS	- CLEAR FLOOR SPACE	JC	- JANITORS CLOSET	SPEC	- SPECIFICATION(S)
CJ	- CONTROL JOINT			SQ	- SQUARE
CL	- CENTER LINE	L	- LONG	SS	- STAINLESS STEEL
CLG	- CEILING	LAM	- LAMINATE(D)	ST	- STORAGE
CLR	- CLEAR	LAV	- LAVATORY	STD	- STANDARD
CMU	- CONCRETE MASONRY UNIT	LRV	- LIGHT REFLECTANCE VALUE	STRG	- STORAGE
CO	- CLEAN OUT	LVL	- LEVEL	STRUCT	- STRUCTURAL OR STRUCTURE
COL	- COLUMN			SUSP	- SUSPENDED
CONC	- CONCRETE	MAX	- MAXIMUM	SYM	- SYMMETRICAL
CONT	- CONTINUOUS	MECH	- MECHANICAL		
CPT	- CARPET	MFG	- MANUFACTURER	TB	- TACK BOARD
CT	- CERAMIC TILE	MIN	- MINIMUM	TS	- TACK STRIP
		MISC	- MISCELLANEOUS	TYP	- TYPICAL
		MO	- MASONRY OPENING		
DF	- DRINKING FOUNTAIN	MR	- MOISTURE RESISTANT	UNO	- UNLESS NOTED OTHERWISE
DIA	- DIAMETER	MTL	- METAL		
DIM	- DIMENSION			VCT	- VINYL COMPOSITION TILE
DIR	- DIRECTOR	NIC	- NOT IN CONTRACT	VERT	- VERTICAL
DN	- DOWN	NO	- NUMBER	VOC	- VOLATILE ORGANIC COMPOUND
DR	- DOCTOR	NOM	- NOMINAL	VTR	- VENT THROUGH ROOF
DS	- DOWNSPOUT	NTS	- NOT TO SCALE		
DTL	- DETAIL			W	- WIDE OR WIDTH
DWG'S	- DRAWINGS	OC	- ON CENTER	W/	- WITH
		OD	- OUTSIDE DIAMETER	W/O	- WITHOUT
EA	- EACH	OCF	- OFFICE	WD	- WOOD
EJ	- EXPANSION JOINT	OPP	- OPPOSITE	WWF	- WELDED WIRE FABRIC
EL	- ELEVATION	OPP HD	- OPPOSITE HAND		
ELEC	- ELECTRIC / ELECTRICAL	OVHD	- OVERHEAD		
ELEV	- ELEVATION	OS	- OVERFLOW SCUPPER		
EPDM	- ETHYLENE PROPYLENE DIENE MONOMER				
EQ	- EQUAL	PC	- PIECE		
EX	- EXISTING	PED	- PEDIATRICIAN		
EXIST	- EXISTING	PLAM	- PLASTIC LAMINATE		
EXP	- EXPANSION	PM	- PROJECTOR MOUNT		
EXT	- EXTERIOR	PS	- PROJECTOR SCREEN		
		PT	- PORCELAIN TILE		
FD	- FLOOR DRAIN	PVC	- POLYVINYL CHLORIDE		
FE	- FIRE EXTINGUISHER				
FEC	- FIRE EXTINGUISHER CABINET				
FFD	- FLUSHING FLOOR DRAIN				
FFE	- FINISH FLOOR ELEVATION				
FIN	- FINISH				
FLR	- FLOOR				
FTG	- FOOTING				

SHEET INDEX

GENERAL	
G1.01	INDEX
CIVIL	
C1.0	SURVEY
C2.1	PROPOSED SITE PLAN
ARCHITECTURAL	
A1.11	FLOOR AND ROOF PLANS
A2.01	EXTERIOR ELEVATIONS
A3.01	BUILDING & WALL SECTIONS AND INTERIOR ELEVATIONS
A6.01	FINISH, DOOR, & WINDOW SCHEDULES
STRUCTURAL	
S1	STRUCTURAL PLAN VIEWS
S2	STRUCTURAL DETAILS
S3	GENERAL STRUCTURAL NOTES
PLUMBING	
P0.1	GENERAL INFORMATION
MECHANICAL	
M0.1	GENERAL INFORMATION
M1.0	FLOOR PLANS
ELECTRICAL	
E1.0	FLOOR PLAN

GENERAL CONSTRUCTION NOTES

- | | | | |
|-----|---|-----|---|
| 1. | THE CONTRACTOR SHALL VERIFY THE JOB SITE TO REVIEW THE SCOPE OF WORK AND CONFIRM THAT THE WORK MAY BE ACCOMPLISHED AS SHOWN. | 23. | RAZE EXISTING STRUCTURE AS REQUIRED, PROPERLY DISPOSING OF DEBRIS WITH A LEGAL DUMPSTER ON SITE. |
| 2. | PLANS ARE NOT TO BE SCALED AND ARE INTENDED TO BE A DIAGRAMMATIC OUTLINE, UNLESS OTHERWISE NOTED. | 24. | REMOVE SIDEWALKS, DRIVEWAYS, AND OTHER FLATWORK ON SITE AS REQUIRED. |
| 3. | FURNISH ALL MATERIALS, EQUIPMENT, AND LABOR NECESSARY TO AFFECT ALL INSTALLATIONS INDICATED ON THE DRAWINGS, INCLUDING DETAILS AND LABOR NECESSARY FOR SUCCESSFUL INSTALLATION OF THE WORK. | 25. | REMOVE EXISTING SHRUBS, TREE ROOTS, ETC WHERE NEW FLATWORK, DRAINLINES, AND HOUSE SLABS WILL BE LOCATED AS REQUIRED. |
| 4. | INSTALL ALL EQUIPMENT AND MATERIALS IN STRICT ACCORDANCE WITH MANUFACTURERS' RECOMMENDATIONS UNLESS SPECIFICALLY INDICATED OTHERWISE OR WHERE LOCAL CODES OR REGULATIONS TAKE PRECEDENCE. | 26. | COORDINATE TREE REMOVAL WITH MUNICIPALITY. PROTECT TREES TO REMAIN. |
| 5. | DETAILS ARE INTENDED TO SHOW END RESULT OF DESIGN. MINOR MODIFICATIONS MAY BE REQUIRED TO SUIT JOB DIMENSIONS OR CONDITIONS. | 27. | FILL HOLES CAUSED BY REMOVAL OF EXISTING OBSTRUCTIONS WITH SOIL SIMILAR TO EXISTING ADJACENT SOILS. |
| 6. | WORK SHOWN OR REFERRED TO ON ANY DRAWING SHALL BE PROVIDED AS THOUGH SHOWN ON ALL RELATED DRAWINGS. | 28. | SLOPE ALL CONCRETE PAVING AWAY FROM BUILDING AT MINIMUM 1%. |
| 7. | EVERY EFFORT HAS BEEN MADE TO PROVIDE THE COMPLETE SCOPE OF WORK. MINOR OMISSIONS AND DISCREPANCIES IN THE DRAWINGS SHALL NOT DIMINISH THE EXPECTATION OF A COMPLETED FACILITY AND IMPROVEMENTS IN ACCORDANCE WITH THE INTENT OF THESE DOCUMENTS. IN THE EVENT OF DISCREPANCIES, PRICE THE MORE EXPENSIVE OR EXTENSIVE WORK, UNLESS DIRECTED OTHERWISE. | 29. | SLOPE ALL CONCRETE WALKS AWAY FROM BUILDING AT MINIMUM 2%. |
| 8. | GENERAL CONTRACTOR SHALL PROVIDE AT THE JOB SITE A FULL SET OF CONSTRUCTION DOCUMENTS ANNOTATED WITH THE LATEST REVISIONS AND CLARIFICATIONS FOR THE USE BY ALL. | 30. | SLOPE ALL FINAL GRADING AWAY FROM BUILDING TO ENSURE POSITIVE DRAINAGE TO AREA DRAINS OR CULVERTS, NOT TO ADJACENT PROPERTIES. |
| 9. | GENERAL CONTRACTOR SHALL COORDINATE, APPLY, AND PAY FOR ALL PERMITS, INSPECTIONS, AND/OR CERTIFICATES FROM THE APPROPRIATE AGENCIES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO CALL FOR LOCAL INSPECTIONS AND OBTAIN APPROVAL FROM THE STATE FIRE MARSHAL IF REQUIRED. | 31. | ALL DRIVEWAY AND SIDEWALKS SHALL MEET LOCAL DEPARTMENT OF PUBLIC WORKS STANDARD DETAILS IF APPLICABLE. |
| 10. | THE CONTRACTOR SHALL VERIFY THE MINIMUM FINISH FLOOR ELEVATION WITH THE CITY/PARISH FEMA BASE FLOOD ELEVATION AND BENCHMARK CERTIFICATE. | 32. | THE CONTRACTOR SHALL COORDINATE ALL UTILITIES INSTALLATION AND CONNECTION WITH LOCAL UTILITY COMPANY. |
| 11. | THE CONTRACTOR SHALL HAVE THE WORK SITE CLEANED ON A DAILY BASIS. THE DISPOSAL OF ANY WASTE SHALL BE OFF SITE AND IN A MANNER PRESCRIBED UNDER THE LAW. | 33. | CONTRACTOR SHALL PROVIDE CLEAN OUT LOCATIONS, TIE-IN LOCATIONS, AND WATER AND SEWER LINE LOCATIONS ON SITE TO PERMIT DEPARTMENT FOR REVIEW. |
| 12. | COORDINATE WITH UTILITY PROVIDERS TO LOCATE, CAP, AND/OR DISCONNECT UTILITIES AS REQUIRED. | 34. | LAY NEW SOD TO COVER ALL AREAS OF YARD DISTURBED BY CONSTRUCTION ACTIVITIES. SOD MUST BE BAHIA, ZOYSIA, OR BERMUDA. |
| | | 35. | CONTRACTOR SHALL PROVIDE ALL PLUMBING FIXTURES, ELECTRICAL FIXTURE, DOOR HARDWARE, BATHROOM HARDWARE, AND BATHROOM ACCESSORIES IN A CONSISTENT MATERIAL FINISH. |
| | | 36. | APPLIANCES SHALL BE ENERGY STAR CERTIFIED - CLOTHES WASHER, CLOTHES DRYER, RANGE HOOD, DISHWASHER, REFRIGERATOR. SUPPLY HOSES TO WATER USING FIXTURES AND APPLIANCES MUST BE ARMORED PEX OR METAL (NOT COPPER). |

A. BUILDING DATA

TYPE OF WORK	: NEW CONSTRUCTION
CONSTRUCTION TYPE	: SINGLE FAMILY RESIDENTIAL
FIRE ALARM	: NO
SPRINKLERS	: NO
STANDPIPPES	: NO
FIRE/SMOKE RATED WALLS	: NO
FIRE DISTRICT	: TBD
FLOOD HAZARD AREA	: TBD
RISK CATEGORY	: TBD
SEISMIC DESIGN CATEGORY	: TBD (FIGURE R301.2.2(2))
BUILDING HEIGHT	: 17'-2" (HEIGHT OF PIERS IF APPLICABLE)
GROSS NEW BUILDING AREA	: 102 SF
FRONT PORCH	: 108 SF
REAR PORCH	: 23 SF

B. ENERGY SUMMARY

CLIMATE ZONE		: 2
IECC REQUIREMENTS:		
TABLE R402.1.2		
CEILING	REQUIRED	/ PROVIDED
	R-38 Blown	/ R-38 Blown
WALLS ABOVE GRADE (WOOD FRAMED)	R-19 Blanket	/ R-19 Blanket
FLOOR	R-13	/ R-13
SLAB	R-13	/ R-13
	R-0	/ R-0
TABLE R402.1.2		
PENETRATION REQUIREMENTS		
MAXIMUM U-FACTOR	0.4	
SHGC	0.25	

C. BUILDING CODE SUPPORTING DATA

**2018 WOOD FRAME CONSTRUCTION MANUAL
AMERICANS WITH DISABILITIES ACT GUIDELINES**

R302.7 ENCLOSED SPACE UNDER STAIRS THAT IS ACCESSED BY A DOOR OR ACCESS PANEL SHALL HAVE WALLS, UNDER-STAIR SURFACE AND ANY SOFFITS PROTECTED ON THE ENCLOSED SIDE WITH 1/2-INCH GYPSUM BOARD

R302.11 IN COMBUSTIBLE CONSTRUCTION, FIREBLOCKING SHALL BE PROVIDED TO CUT OFF BOTH VERTICAL AND HORIZONTAL CONCEALED DRAFT OPENINGS AND TO FORM AN EFFECTIVE FIRE BARRIER BETWEEN STORIES, AND BETWEEN A TOP STORY AND THE ROOF SPACE

R304.1 HABITABLE ROOMS SHALL HAVE AN AGGREGATE GLAZING AREA OF NOT LESS THAN 8 PERCENT OF THE FLOOR AREA OF SUCH ROOMS

R304.1 HABITABLE ROOMS SHALL HAVE A ROOM AREA OF NOT LESS THAN 70 SQUARE FEET
EXCEPTION: KITCHENS

R304.2 HABITABLE ROOMS SHALL BE NOT LESS THAN 7 FEET IN ANY HORIZONTAL DIMENSION
EXCEPTION: KITCHENS

R310.1 EVERY SLEEPING ROOM SHALL HAVE NOT LESS THAN ONE OPERABLE EMERGENCY ESCAPE AND RESCUE OPENING

R310.2.1 EMERGENCY ESCAPE AND RESCUE OPENINGS SHALL HAVE A NET CLEAR OPENING OF NOT LESS THAN 5.7 SQUARE FEET

R311.2 NOT LESS THAN ONE EGRESS DOOR SHALL BE PROVIDED FOR EACH DWELLING UNIT, AND SHALL PROVIDE A CLEAR WIDTH OF NOT LESS THAN 32 INCHES.

R311.3 THERE SHALL BE A LANDING OR FLOOR ON EACH SIDE OF EACH EXTERIOR DOOR. THE WIDTH OF THE LANDING SHALL BE NOT LESS THAN THE DOOR SERVED, LANDINGS SHALL HAVE A DIMENSION OF NOT LESS THAN 36 INCHES MEASURED IN THE DIRECTION OF TRAVEL.

R311.6 THE WIDTH OF A HALLWAY SHALL BE NOT LESS THAN 3 FEET

R311.7.3 A FLIGHT OF STAIRS SHALL NOT HAVE A VERTICAL RISE LARGER THAN 151 INCHES BETWEEN LANDINGS

R311.7.5.1 THE MAXIMUM RISER HEIGHT SHALL BE 7 3/4 INCHES

R311.7.5.2 THE TREAD DEPTH SHALL BE NOT LESS THAN 10 INCHES

R314.3 SMOKE ALARMS SHALL BE INSTALLED IN EACH SLEEPING ROOM, OUTSIDE EACH SEPARATE SLEEPING AREA IN THE IMMEDIATE VICINITY OF THE BEDROOMS, NOT LESS THAN 3 FEET HORIZONTALLY FROM THE DOOR OR OPENING OF A BATHROOM THAT CONTAINS A BATHTUB OR SHOWER

R319.1 BUILDINGS SHALL BE PROVIDED WITH APPROVED ADDRESS IDENTIFICATION. THE ADDRESS IDENTIFICATION SHALL BE LEGIBLE AND PLACED IN A POSITION THAT IS VISIBLE FROM THE STREET OR ROAD FRONTING THE PROPERTY. EACH CHARACTER SHALL BE NOT LESS THAN 4 INCHES IN HEIGHT

R408.1 THE UNDER-FLOOR SPACE BETWEEN THE BOTTOM OF THE FLOOR JOISTS AND THE EARTH UNDER ANY BUILDING SHALL HAVE VENTILATION OPENINGS THROUGH FOUNDATION WALLS OR EXTERIOR WALLS. THE MINIMUM NET AREA OF VENTILATION OPENINGS SHALL BE NOT LESS THAN 1 SQUARE FOOT FOR EACH 140 SQUARE FEET OF UNDER-FLOOR SPACE AREA. ONE SUCH VENTILATING OPENING SHALL BE WITHIN 3 FEET OF EACH CORNER OF THE BUILDING

2 BEDROOM / 2 BATH WIDE SLAB

SEAL

SCALE

As indicated

[illegible]


No.	Description	Date
REVISIONS		
DRAWN BY	_____	
APPROVED BY	_____	
CHECKED BY	_____	
DATE	_____	
TITLE		

INDEX

PROJECT NO.

SHEET NO.



G1.01

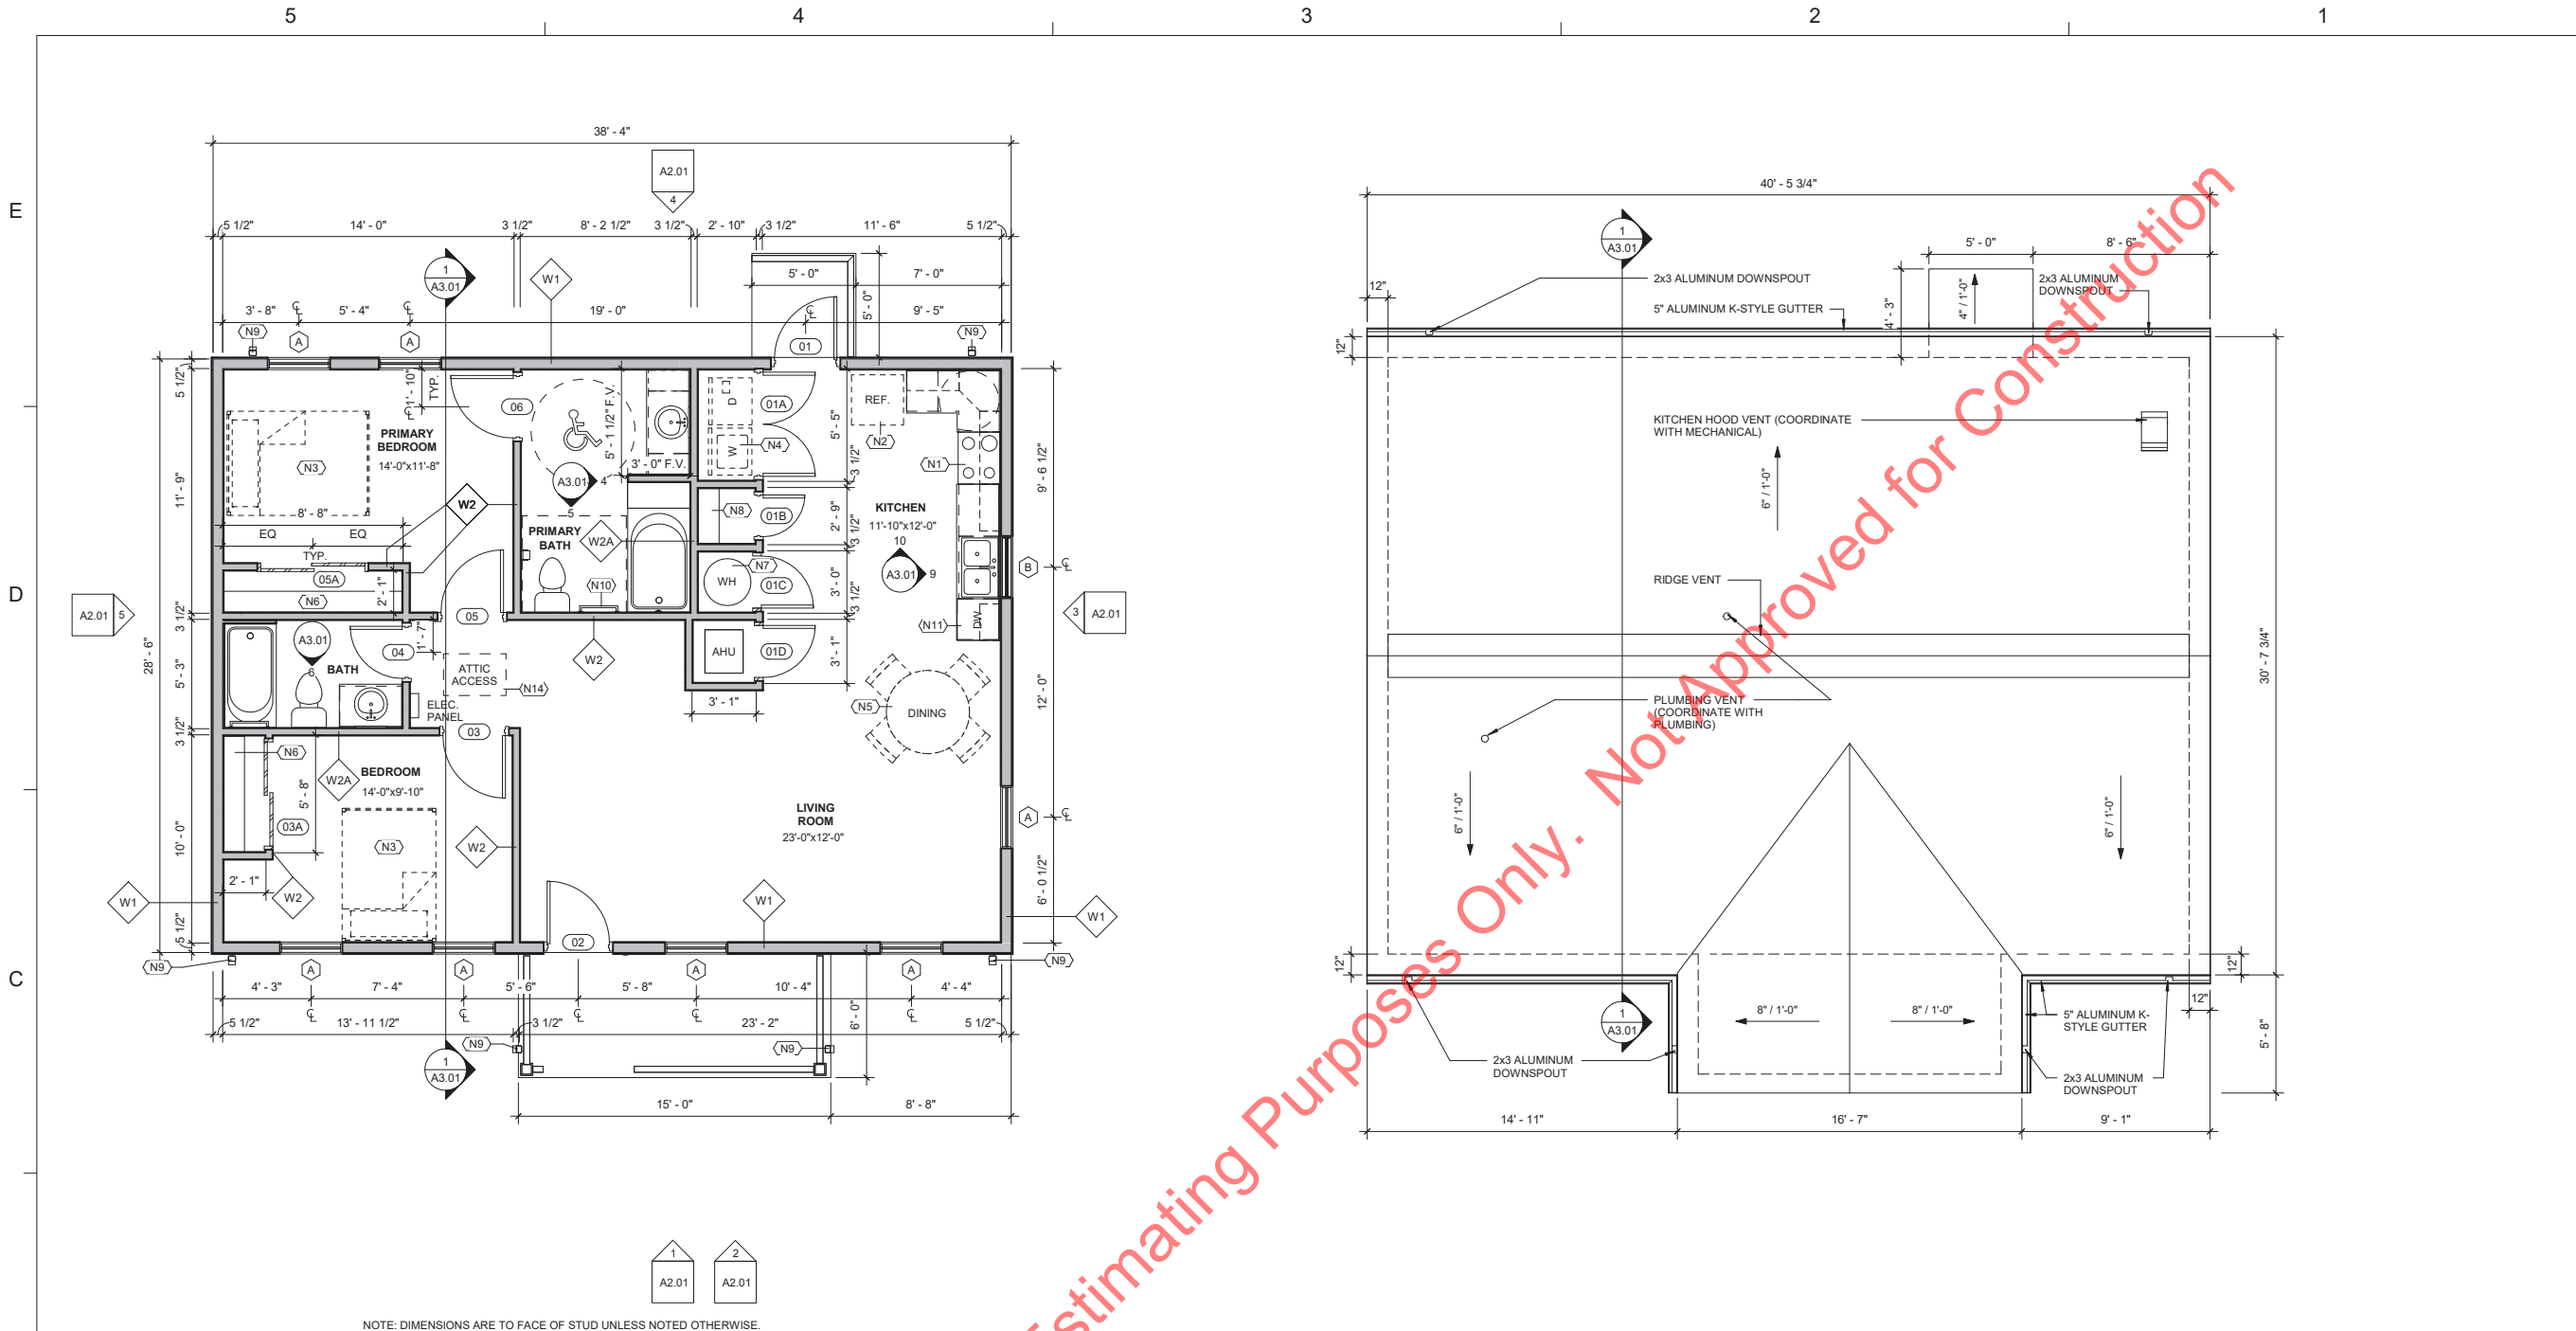

1 FLOOR PLAN - 1,100 SF
Scale: 1/4" = 1'-0"

2 ROOF PLAN
Scale: 1/4" = 1'-0"

NEW WORK KEYED NOTES	
NOTE	DESCRIPTION
N1	SELF-CLEANING RANGE
N2	ENERGY STAR CERTIFIED REFRIGERATOR
N3	BED (NIC)
N4	ENERGY STAR CERTIFIED WASHER & DRYER (NIC)
N5	VENT DRYER TO EXTERIOR
N6	DINING TABLE/CHAIRS (NIC)
N7	12" DEEP VINYL COATED WIRE MESH CLOSET SHELVE
N8	WATER HEATER, PROVIDE DRAIN PAN (COORDINATE WITH PLUMBING)
N9	(5) 18" DEEP WIRE MESH SHELVE AT 15" SPACING
N10	DOWNSPOUT (SEE ROOF PLAN) DISCHARGE DOWNSPOUT MINIMUM 36" AWAY FROM FOUNDATION. PROVIDE ADAPTPTOR, REDUCER, AND NECESSARY PVC FITTINGS TO CONNECT TO NON-PERFORATED SCHEDULE 40 4" PVC PIPE. SLOPE AWAY FROM FOUNDATION
N11	TOWEL RACK AT 48" AFF (PROVIDE BLOCKING AS REQUIRED)
N14	ENERGY STAR CERTIFIED DISHWASHER
N14	WOOD PULL DOWN, FOLDING ATTIC LADDER WITH WOOD CASING TRIM (PAINT)

WALL LEGEND		
WALL SYMBOL	WALL DESCRIPTION	WALL DETAIL
W1	EXTERIOR WALL 2x6 WOOD STUDS @ 16" O.C. PROVIDE 1/2" GPDW ON ROOM SIDE AND 1/2" INTEGRATED WATER RESISTIVE SHEATHING (TAPE ALL JOINTS & PENETRATIONS) ON EXTERIOR WITH R-13 INSULATION BATTS IN BETWEEN. CEMENTITIOUS LAP SIDING ON EXTERIOR SIDE	
W2	INTERIOR PARTITION 2x4 WOOD STUDS @ 16" O.C. PROVIDE 1/2" GPDW ON EACH SIDE AND SOUND ATTENUATION BATTS IN BETWEEN. WALLS TO EXTEND BOTTOM OF TRUSS W2A - MOISTURE RESISTANT GPDW AT BATHROOMS, KITCHEN, WASHER/DRYER	

2 BEDROOM / 2 BATH WIDE SLAB

SEAL

SCALE

As indicated

No.	Description	Date

REVISIONS

DRAWN BY _____
APPROVED BY _____
CHECKED BY _____
DATE _____

TITLE

FLOOR AND
ROOF PLANS


PROJECT NO.

A1.11


SHEET NO.



SHEET NO.

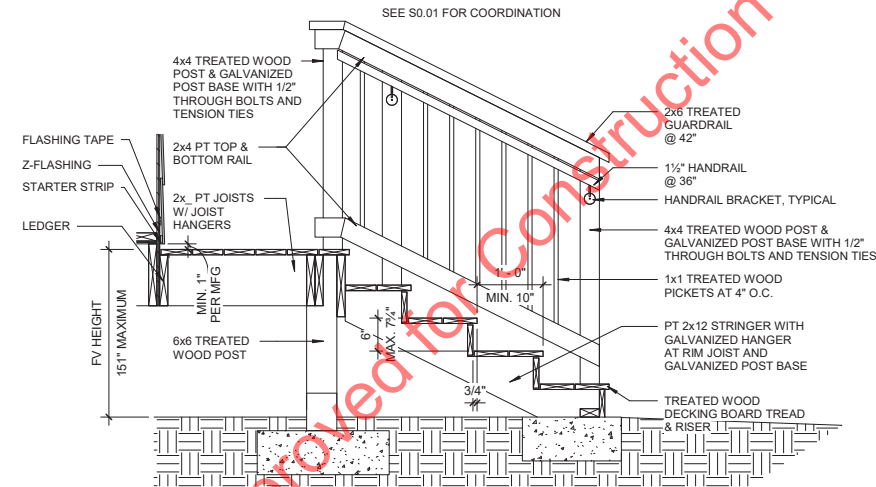

2 STAIR SECTION
Scale: 3/4" = 1'-0"

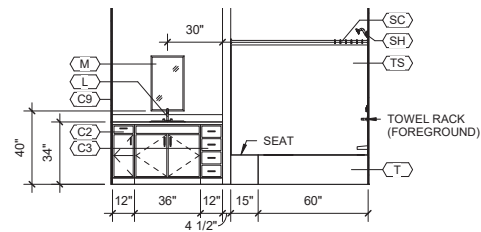

Side elevation of a toilet stall. The diagram shows a toilet fixture with a towel rack mounted on the wall above it. The stall is defined by a 36" wide door on the left and a 36" wide opening on the right. The distance from the door to the toilet is 43 1/2". The distance from the toilet to the right wall is 18". The toilet fixture is labeled with (TPH) for the toilet paper holder and (WC) for the toilet. The towel rack is labeled TOWEL RACK. The door has a handle labeled (SH) and a lock labeled (SC). The controls are labeled CONTROLS. The dimensions are 36", 43 1/2", and 18".

6 BATH ELEVATION

TOILET ELEVATION KEYED NOTES	
NOTE	DESCRIPTION
GB	OPTIONAL ACCESSIBLE GRAB BAR (PROVIDE BLOCKING IN WALL)
KG	OPTIONAL ACCESSIBLE ADA KNEE GUARD
L	LOW FLOW <1.5 GPM LAVATORY FAUCET WITH CULTURED MARBLE COUNTER WITH INTEGRAL BACKSPLASH AND SINK
M	FRAMED MIRROR, 18"x36"
RS	PREFABRICATED ROLL-IN SHOWER UNIT
SC	SHOWER CURTAIN ROD
SH	LOW FLOW <2 GPM SHOWER HEAD
SHA	OPTIONAL ACCESSIBLE HANDHELD LOW FLOW <2 GPM SHOWER HEAD
T	COMPOSITE BATHUB
TPH	TOILET PAPER HOLDER (PROVIDE BLOCKING IN WALL)
TS	FIBERGLASS TUB SURROUND WITH INTEGRAL SOAP DISH, SEALED WITH WATERPROOFING CAULK
WC	HIGH EFFICIENCY <1.28 GPM WATER CLOSET


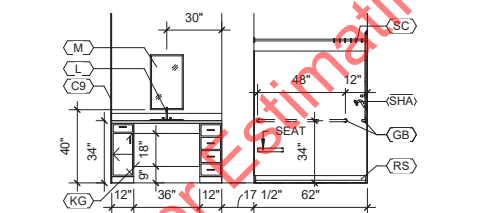


Figure 1 is a plan view of a bathroom stall. It shows the layout of the stall with various components and their dimensions in inches. The components labeled are: SC (Stall Control), SHA (Showerhead), GB (Grab Bar), RS (Restroom Sign), TOWEL RACK, WC (Toilet), and (TPH) (Toilet Paper Holder). The dimensions are as follows:

- Overall stall width: 36"
- Distance from left wall to towel rack: 36"
- Distance from towel rack to toilet: 44"
- Distance from toilet to right wall: 18"
- Distance from left wall to SHA: 36"
- Distance from SHA to GB: 4"
- Distance from GB to towel rack: 6"
- Distance from towel rack to WC: 42"
- Distance from WC to right wall: 30"
- Distance from SHA to RS: 18"
- Distance from RS to right wall: 40"
- Distance from GB to WC: 15"
- Distance from GB to right wall: 18"
- Distance from WC to right wall: 30"
- Distance from RS to right wall: 40"

8 PRIMARY BATH ELEVATION
OPTIONAL ACCESSIBLE
Scale: 1/4" = 1'-0"

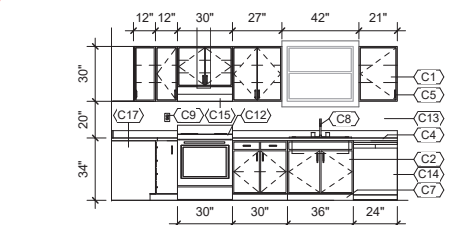

10 KITCHEN ELEVATION

3 TYPICAL WALL SECTION
Scale: 3/4" = 1'-0"

CASEWORK KEYED NOTES	
NOTE	DESCRIPTION
C1	WALL CABINET 12" DEEP, PREFINISHED FACE FRAME PLYWOOD/SOLID WOOD, WITH ADJUSTABLE SHELVES, SEAL ALL SIDES AND EDGES, NO UREA FORMALDEHYDE USED IN THE CABINET GLUE
C2	BASE CABINET 24" DEEP, PREFINISHED FACE FRAME PLYWOOD/SOLID WOOD, WITH ADJUSTABLE SHELF (DELETE AT SINK), SEAL ALL SIDES AND EDGES, NO UREA FORMALDEHYDE USED IN THE CABINET GLUE
C3	BASE CABINET 24" DEEP, PREFINISHED FACE FRAME PLYWOOD/SOLID WOOD, DRAWERS, SEAL ALL SIDES AND EDGES, NO UREA FORMALDEHYDE USED IN THE CABINET GLUE
C4	POST FORMED LAMINATE COUNTERTOP WITH INTEGRAL BACKSPASH
C5	PULL TYP
C7	TOE KICK
C8	STAINLESS STEEL DOUBLE BASIN SINK AND FAUCET WITH PULL-OUT SPRAYER
C9	GFCI OUTLET, TYPICAL (COORDINATE WITH ELECTRICAL)
C11	ENERGY STAR CERTIFIED REFRIGERATOR
C12	SELF-CLEANING RANGE
C13	LAMINATE BACKSPASH WITH METAL TRIM AT EXPOSED EDGES
C14	ENERGY STAR CERTIFIED DISHWASHER
C15	ENERGY STAR CERTIFIED RANGE HOOD
C16	WALL CABINET 12" DEEP, PREFINISHED FACE FRAME PLYWOOD/SOLID WOOD, WITH ADJUSTABLE SHELVES, CORNER UNIT, SEAL ALL SIDES AND EDGES, NO UREA FORMALDEHYDE USED IN THE CABINET GLUE
C17	BASE CABINET 24" DEEP, PREFINISHED FACE FRAME PLYWOOD/SOLID WOOD, CORNER UNIT, SEAL ALL SIDES AND EDGES, NO UREA FORMALDEHYDE USED IN THE CABINET GLUE

2 BEDROOM / 2 BATH WIDE SLAB

SEAL

SCALE

As indicated

No	Description	Date

REVISIONS

DRAWN BY

APPROVED BY _____

CHECKED BY


TITLE


BUILDING & WALL SECTIONS AND INTERIOR ELEVATIONS

PROJECT NO.

SHEET NO.

SHEET NO.

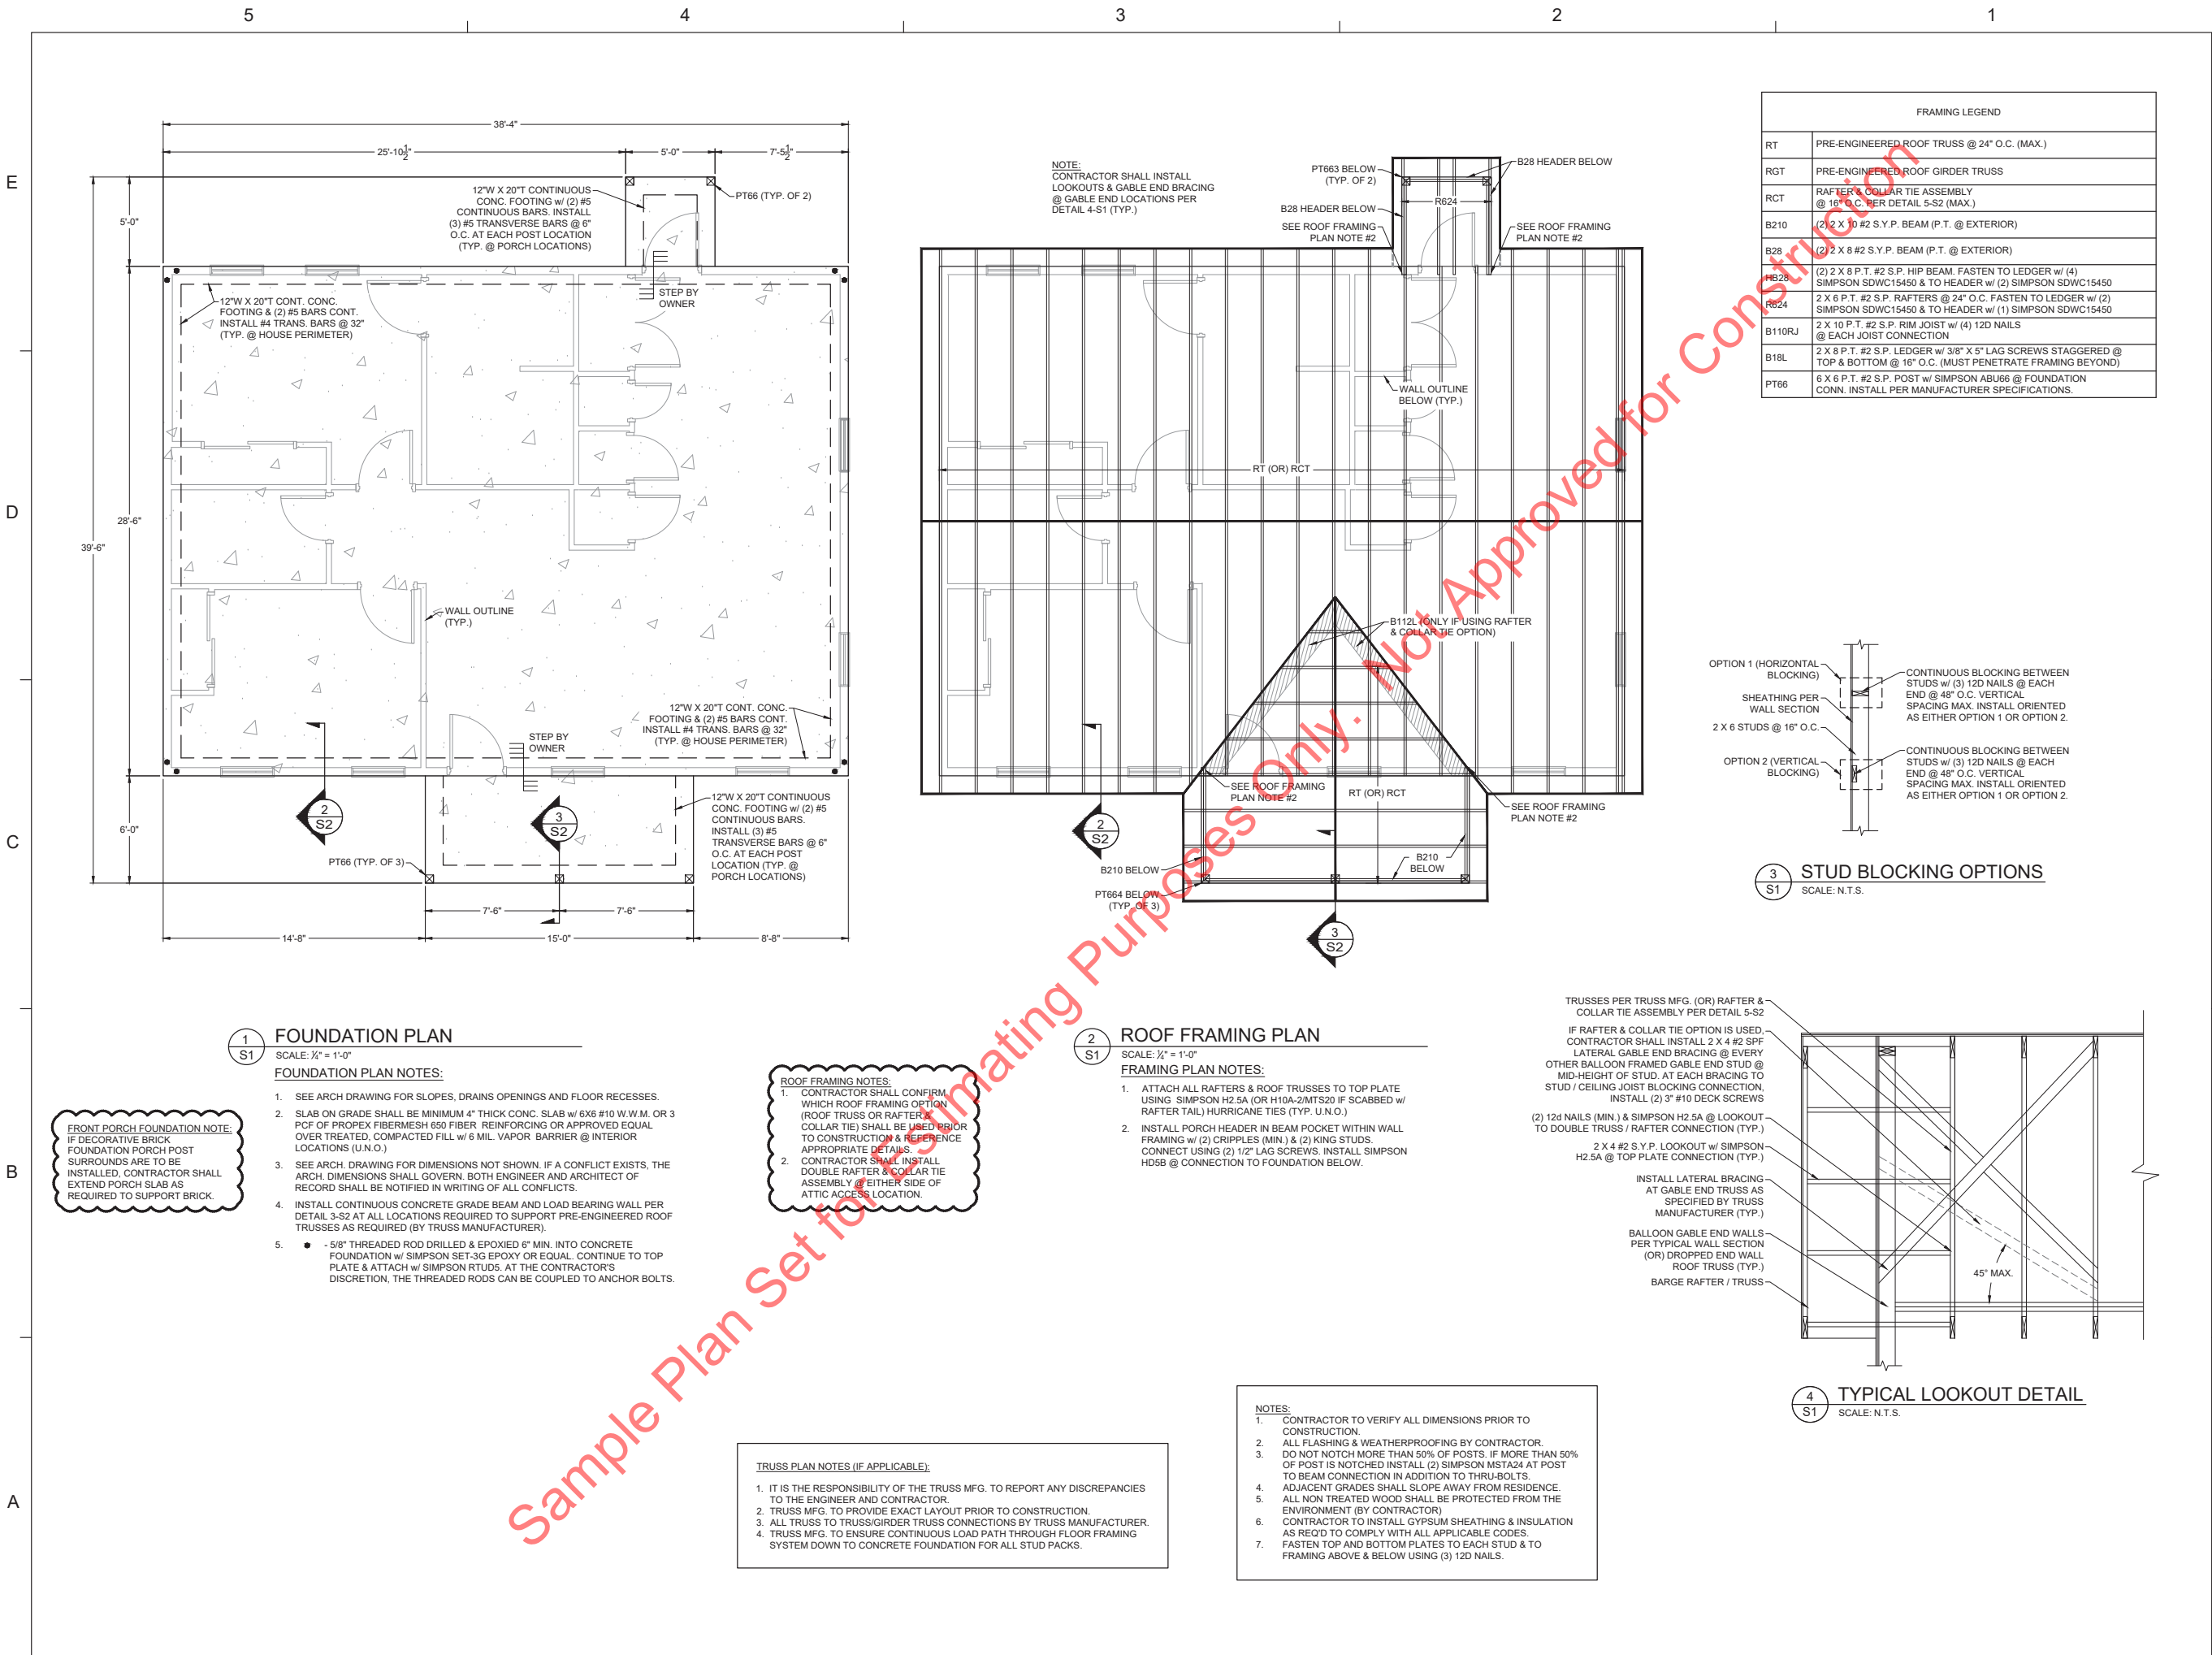

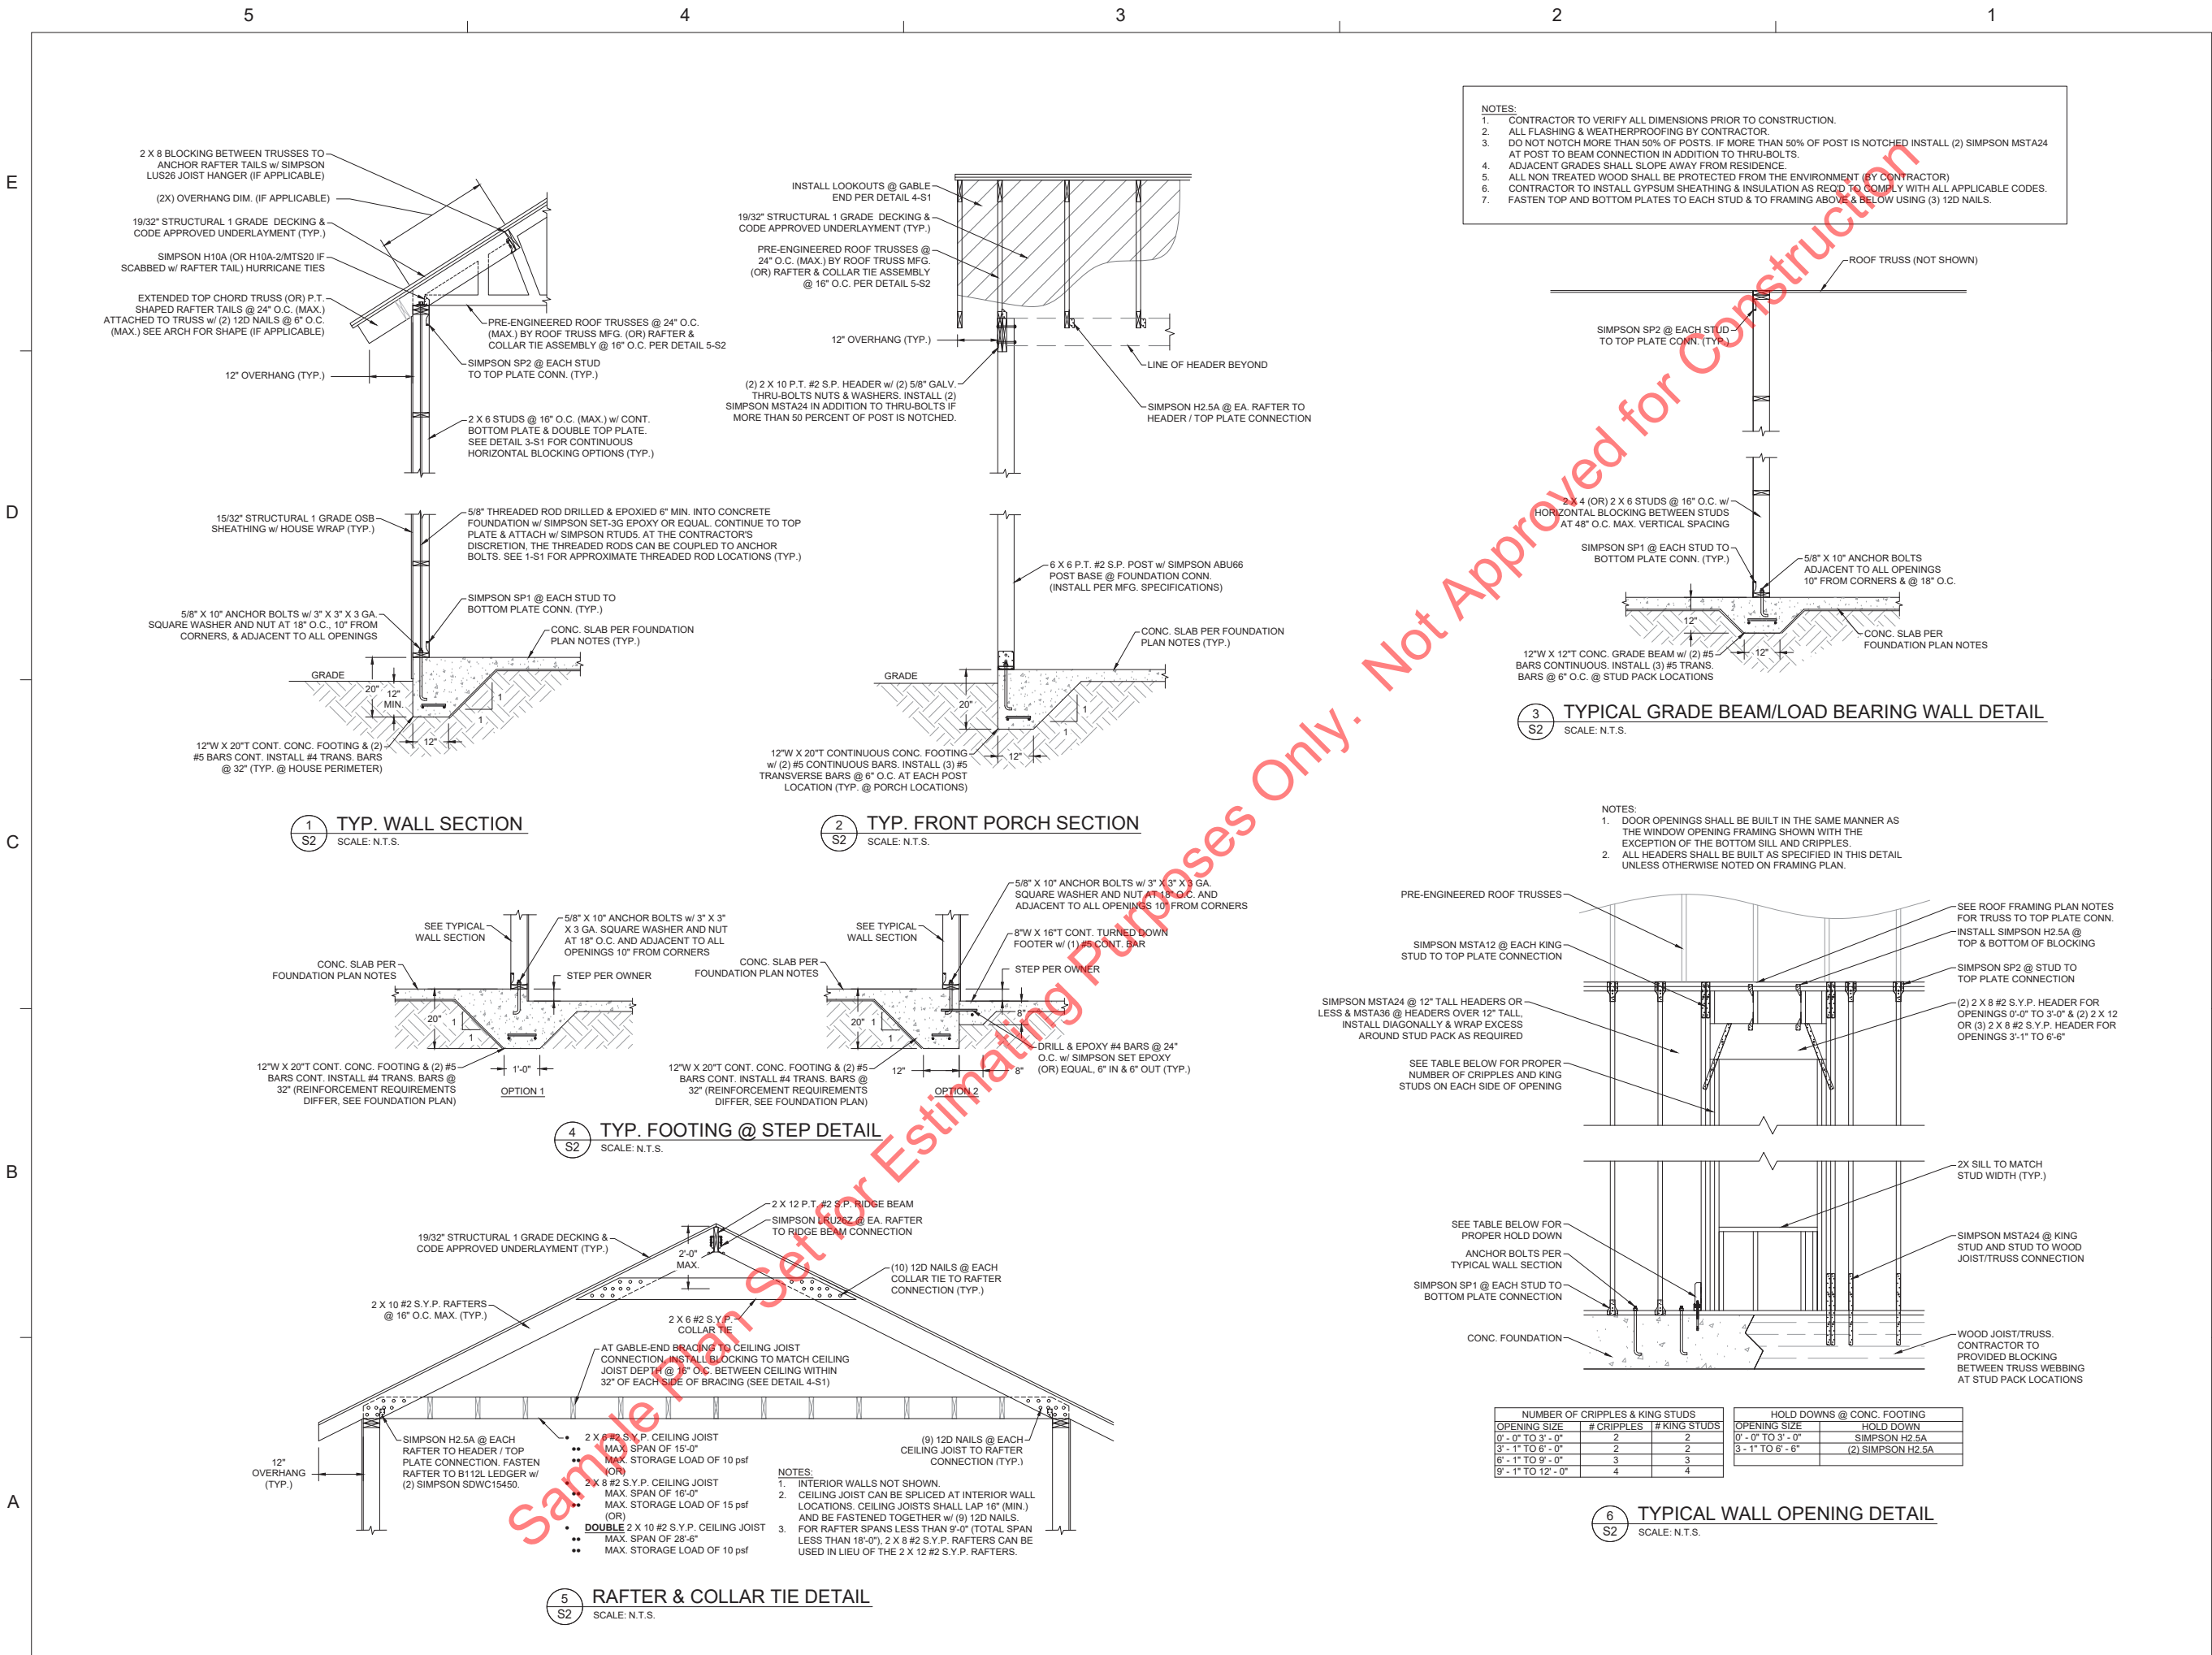

2 BEDROOM / 2 BATH WIDE SLAB

SCALE

1/2" = 1'-0"

2'	1'	0'	2'
----	----	----	----

BY	ITEM	DATE

REVISIONS

DRAWN BY	
APPROVED BY	
CHECKED BY	
DATE	

TITLE

STRUCTURAL
DETAILS

PROJECT NO.

S2

SHEET NO.

GENERAL

- THE OWNER/CONTRACTOR SHALL VERIFY AND BE RESPONSIBLE FOR ALL FINAL DIMENSIONS, PRIOR TO START.
- THE CONTRACTOR SHALL COORDINATE ARCHITECTURAL, MECHANICAL, ELECTRICAL, PLUMBING, AND CIVIL WORKS DOCUMENTS WITH THE STRUCTURAL CONTRACT DOCUMENTS. NOTIFICATION SHALL BE MADE TO THE ENGINEER OF RECORD OF ANY CONFLICT AND/OR OMISSIONS.
- FOR DIMENSIONS NOT SHOWN ON THE STRUCTURAL CONTRACT DOCUMENTS, SEE THE ARCHITECTURAL PLANS.
- THE CONTRACTOR SHALL VERIFY EXISTING SITE CONDITIONS, DIMENSIONS, AND ELEVATIONS PRIOR TO STARTING WORK. THE ENGINEER SHALL BE NOTIFIED IN WRITING OF ANY DISCREPANCIES IN EXISTING SITE CONDITIONS, DIMENSIONS, OR ELEVATIONS TO THOSE SHOWN IN THE STRUCTURAL CONTRACT DOCUMENTS.
- THE REVIEW OF SUBMITTALS AND/OR SHOP DRAWINGS BY THE ENGINEER DOES NOT RELIEVE THE CONTRACTOR OF THE SOLE RESPONSIBILITY TO REVIEW AND CHECK SHOP DRAWINGS PRIOR TO SUBMITTAL TO THE ENGINEER. THE CONTRACTOR REMAINS SOLELY RESPONSIBLE FOR ERRORS AND OMISSIONS ASSOCIATED WITH THE PREPARATION OF SHOP DRAWINGS AS THEY PERTAIN TO MEMBER SIZES, DETAILS, AND DIMENSIONS SPECIFIED IN THE CONTRACT DOCUMENTS. THE CONTRACTOR ALSO SHALL BE RESPONSIBLE FOR MEANS, METHOD, TECHNIQUES, SEQUENCES, AND PROCEDURES OF CONSTRUCTION INCLUDING BUT NOT LIMITED TO DEMOLITION PROCEDURES AND TEMPORARY SHORING.
- THE CONTRACTOR IS SOLELY RESPONSIBLE FOR THE DESIGN, CONSTRUCTION, AND ERECTION OF SAFE AND ADEQUATE BRACING, SHORING, TEMPORARY SUPPORTS, ETC. REQUIRED FOR STABILITY OF THE STRUCTURE DURING ALL INTERMEDIATE STAGES OF CONSTRUCTION AND/OR DEMOLITION.
- IN NO CASE SHALL STRUCTURAL ALTERATIONS OR WORK AFFECTING A STRUCTURAL MEMBER BE MADE, UNLESS APPROVED BY THE ENGINEER OF RECORD IN WRITING.
- NO PROVISION OF ANY REFERENCED STANDARD SPECIFICATION, MANUAL OR CODE (WHETHER OR NOT SPECIFICALLY INCORPORATED BY REFERENCE IN THE CONTRACT DOCUMENTS) SHALL BE EFFECTIVE TO CHANGE THE DUTIES AND RESPONSIBILITIES OF OWNER, CONTRACTOR, ENGINEER, SUPPLIER, OR ANY OF THEIR CONSULTANTS, AGENTS, OR EMPLOYEES FROM THOSE SET FORTH IN THE CONTRACT DOCUMENTS. NOR SHALL IT BE EFFECTIVE TO ASSIGN TO THE STRUCTURAL ENGINEER OF RECORD OR ANY OF THE STRUCTURAL ENGINEER OF RECORD'S CONSULTANTS, AGENTS, OR EMPLOYEES ANY DUTY OR AUTHORITY TO SUPERVISE OR DIRECT THE FURNISHING OR PERFORMANCE OF THE WORK OR ANY DUTY OR AUTHORITY TO UNDERTAKE RESPONSIBILITIES CONTRARY TO THE PROVISIONS OF THE CONTRACT DOCUMENTS.
- CONTRACT DOCUMENTS INCLUDE, BUT ARE NOT LIMITED TO, THE STRUCTURAL DOCUMENTS (DRAWINGS AND SPECIFICATIONS), BUT DO NOT INCLUDE SHOP DRAWINGS, VENDOR DRAWINGS, OR MATERIAL PREPARED AND SUBMITTED BY THE CONTRACTOR.
- REFERENCE TO STANDARD SPECIFICATIONS OF ANY TECHNICAL SOCIETY, ORGANIZATION, OR ASSOCIATION OR TO CODES OF LOCAL OR STATE AUTHORITIES, SHALL MEAN THE LATEST STANDARD, CODE, SPECIFICATION OR TENTATIVE SPECIFICATION ADOPTED AT THE DATE OF TAKING BIDS, UNLESS SPECIFICALLY STATED OTHERWISE.
- CONTRACT DOCUMENTS SHALL GOVERN IN THE EVENT OF A CONFLICT WITH THE CODE OF PRACTICE OR SPECIFICATIONS OF ACI, PCI, AISI, SJI OR OTHER STANDARDS. WHERE A CONFLICT OCCURS WITHIN THE CONTRACT DOCUMENTS, THE STRICTEST REQUIREMENT SHALL GOVERN.
- MATERIAL, WORKMANSHIP, AND DESIGN SHALL CONFORM TO THE REFERENCED BUILDING CODE.
- CONTRACTOR SHALL OBTAIN AND COORDINATE EDGE OF SLAB DIMENSIONS, OPENING LOCATIONS AND DIMENSIONS, DEPRESSED SLAB LOCATIONS AND EXTENTS, SLAB SLOPES, CURB LOCATIONS, AND CMU WALL LOCATIONS. ARCHITECT/STRUCTURAL ENGINEER SHALL BE NOTIFIED OF ANY DISCREPANCY OR OMISSION.
- CONTRACTOR HAS SOLE RESPONSIBILITY FOR MEANS, METHODS, SAFETY, TECHNIQUES, SEQUENCES, AND PROCEDURES OF CONSTRUCTION.
- CONTRACTOR HAS SOLE RESPONSIBILITY TO COMPLY WITH ALL OSHA REGULATIONS.
- REPRODUCTION OF STRUCTURAL DRAWINGS FOR SHOP DRAWINGS IS NOT PERMITTED. ELECTRONIC DRAWING FILES WILL NOT BE PROVIDED TO THE CONTRACTOR.
- SUBMIT SHOP DRAWINGS WHICH ADEQUATELY DEPICT THE STRUCTURAL ELEMENTS AND CONNECTIONS SHOWN IN THE CONTRACT DOCUMENTS. SHOP DRAWINGS SHALL BE SEALED BY ENGINEER LICENSED IN THE PROJECT STATE. REVIEW OF SHOP DRAWINGS SHALL BE FOR CONFORMANCE WITH THE CONTRACT DOCUMENTS REGARDING ARRANGEMENT AND SIZES OF MEMBERS AND THE CONTRACTOR'S INTERPRETATION OF THE DESIGN LOADS AND CONTRACT DOCUMENT DETAILS. REVIEW OF SUBMITTALS OR SHOP DRAWINGS BY THE ARCHITECT/STRUCTURAL ENGINEER DOES NOT RELIEVE THE CONTRACTOR OF THE SOLE RESPONSIBILITY TO REVIEW AND CHECK ALL SUBMITTALS AND SHOP DRAWINGS BEFORE SUBMITTING TO THE STRUCTURAL ENGINEER. REVIEW OF SUBMITTALS OR SHOP DRAWINGS BY THE ARCHITECT/STRUCTURAL ENGINEER DOES NOT RELIEVE THE CONTRACTOR OF FULL RESPONSIBILITY FOR COMPLIANCE WITH THE CONTRACT DOCUMENTS. CONTRACTOR REMAINS SOLELY RESPONSIBLE FOR ERRORS AND OMISSIONS ASSOCIATED WITH THE PREPARATION OF SHOP DRAWINGS AS THEY PERTAIN TO MEMBER SIZES, DETAILS, AND DIMENSIONS SPECIFIED IN THE CONTRACT DOCUMENTS. SHOP DRAWINGS SHALL BE SEALED BY ENGINEER LICENSED IN PROJECT STATE.
- WHERE A SECTION OR DETAIL IS SHOWN OR DETAILED FOR ONE CONDITION, IT SHALL APPLY TO ALL SIMILAR AND LIKE CONDITIONS. DETAILS LABELED "TYPICAL" ON THE STRUCTURAL DRAWINGS APPLY TO ALL SITUATIONS OCCURRING ON THE PROJECT THAT ARE THE SAME OR SIMILAR. THE CONTRACTOR SHALL CONSIDER ALL OF THE CONTRACT DOCUMENTS IN DETERMINING SIMILAR AND LIKE CONDITIONS.
- ALL FLASHING AND WATERPROOFING BY CONTRACTOR.
- ALL ADA REQUIREMENTS SHALL BE ADHERED (IF APPLICABLE) TO AND MAY NOT BE SHOWN ON THESE PLANS IN ITS ENTIRETY.
- PLANS DO NOT INCLUDE ANY FIRE ESCAPE PLAN, FIRE SPRINKLER, OR FIRE RELATED DESIGN ASPECTS, U.N.O. OWNER/CONTRACTOR SHALL PROVIDE APPLICABLE FIRE PROTECTION DESIGN DOCUMENTS NOT SHOWN ON THIS PLAN SET.
- OWNER/CONTRACTOR SHALL BE RESPONSIBLE FOR ALL THRESHOLD INSPECTION REQUIREMENTS (IF APPLICABLE).
- ATTACH STAIR STRINGERS & LANDING FRAMING TO STAIRWELL STUD FRAMING w/ (2) SIMPSON SDWC15600 @ 16" O.C.
- INSTALL LATERAL BRACING AT GABLE END TRUSS AS SPECIFIED BY TRUSS MANUFACTURER.

CODE DESIGN

- WIND LOADS: SEE TABLE

ESTIMATED DEFLECTIONS (IN INCHES) ARE AS FOLLOWS:

	LIVE LOAD	DEAD + LIVE LOAD
ROOF MEMBERS:	L/240 OR < 1"	L/180
FLOOR MEMBERS:	L/360 OR < ½"	L/240

WHERE, L = SPAN LENGTH (IN INCHES) BETWEEN CENTERLINES OF SUPPORTS, (FOR CANTILEVERS, L IS TWICE THE LENGTH OF THE CANTILEVER.)

FOUNDATION

- FOUNDATION DESIGN IS BASED ON AN ASSUMED ALLOWABLE BEARING PRESSURE OF 2000 PSF. STRUCTURAL ENGINEER IS NOT RESPONSIBLE FOR SUBSURFACE CONDITIONS ENCOUNTERED IN THE FIELD DIFFERENT FROM THOSE ASSUMED FOR DESIGN.
- ALL FOUNDATION BEARING SOIL SHALL BE COMPACTED TO 98% STANDARD PROCTOR OR 95% MODIFIED PROCTOR AS SPECIFIED BY AASHTO T-99 AND AASHTO T-180, RESPECTIVELY.
- UNLESS OTHERWISE NOTED, ALL CONSTRUCTION JOINTS SHALL BE CONSTRUCTED w/ 3/4" X 3/4" (MIN.) KEY WAY. ALL SURFACES SHALL BE CLEANED BEFORE PLACEMENT OF ADJACENT CONCRETE. CONSTRUCTION JOINTS / SAW CUTS SHALL BE INSTALLED AT 10' O.C. EACH WAY OR NO GREATER THAN 30 TIMES THE SLAB THICKNESS (LESSER OF THE TWO) AND SHALL BE A MINIMUM OF 1/8" WIDE AND TO A DEPTH OF 25% OF THE SLAB THICKNESS (MIN.) UNLESS OTHERWISE NOTED. ALL CONCRETE SLABS LOCATED WITHIN VE FLOOD ZONES SHALL BE SCORED IN 25 SQ. FT. SECTIONS (MAXIMUM). REFER TO F.D.E.P. PERMIT DRAWINGS FOR ALL CONCRETE SLABS LOCATED SEAWARD OF THE COASTAL CONSTRUCTION CONTROL LINE.
- STRUCTURAL TESTING/INSPECTION AGENCY SHALL CERTIFY THE BEARING MEDIUM BEFORE STARTING CONSTRUCTION.
- NO FOOTINGS SHALL BE PLACED IN WATER.
- ANY SOIL CONDITION ENCOUNTERED DURING EXCAVATION THAT IS CONTRARY TO THE CONDITIONS USED FOR DESIGN OF FOOTINGS AS OUTLINED IN THESE NOTES OR ON THE DRAWINGS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT OR ENGINEER OF RECORD BEFORE PROCEEDING.
- BACK FILL BOTH SIDES OF FOUNDATION WALLS AT SAME TIME TO PREVENT OVERTURNING.

CONCRETE MASONRY

- CONCRETE MASONRY WORK SHALL CONFORM TO ACI 530, BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES AND ACI 530.1, SPECIFICATION FOR MASONRY STRUCTURES.
- MINIMUM COMPRESSIVE STRENGTH OF CONCRETE MASONRY SHALL BE F_m = 1,500 PSI.
- MORTAR SHALL COMPLY WITH THE BUILDING CODE REQUIREMENTS FOR CONCRETE MASONRY AND SHALL BE OF THE FOLLOWING TYPE:

WALLS BELOW GRADE	TYPE M OR S
-------------------	-------------
- CONCRETE MASONRY UNITS SHALL BE GROUTED WITH 2,500 PSI COARSE GROUT AS SHOWN IN THE STRUCTURAL DOCUMENTS. GROUT SHALL CONFORM TO ASTM C476.
- PROVIDE HORIZONTAL JOINT REINFORCEMENT WITH NO. 9 GAGE LONGITUDINAL WIRES AT 16" VERTICALLY, UNLESS NOTED OTHERWISE. PROVIDE SPECIAL ACCESSORIES FOR CORNERS, INTERSECTIONS, ETC.
- MINIMUM VERTICAL WALL REINFORCEMENT SHALL BE #5 @32" UNLESS NOTED OTHERWISE.
- DEFECTIVE AREAS IN CONCRETE INCLUDING, BUT NOT LIMITED TO, HONEY-COMBING, SPALLS, AND CRACKS WITH WIDTHS EXCEEDING 0.01 INCH SHALL BE REPAIRED. EXTENTS OF DEFECTIVE AREA TO BE DETERMINED BY THE STRUCTURAL ENGINEER.
- REINFORCING DOWELS MUST BE TIED IN PLACE PRIOR TO POURING FOOTING. "WET-STICKING" IS NOT ALLOWED.

REINFORCEMENT

- REINFORCING STEEL SHALL CONFORM TO ASTM A615, GRADE 60, UNLESS NOTED OTHERWISE.
- WELDED WIRE FABRIC SHALL CONFORM TO ASTM A185 AND HAVE MINIMUM SIDE AND END LAPS OF 8" FOR ALL MONOLITHIC FOOTINGS. A DOUBLE LAYER OF WELDED WIRE FABRIC SHALL BE INSTALLED WITHIN 3'-0" OF ALL FOOTINGS (3' CLEAR OF OUTSIDE PERIMETER OF FOOTING)
- REINFORCING STEEL SHALL ONLY BE WELDED OR TACK-WELDED IF IT CONFORMS TO ASTM A706, AND AWS D1.4. REINFORCING SHALL NOT BE WELDED NOR TACK-WELDED UNLESS APPROVED BY THE STRUCTURAL ENGINEER OF RECORD.
- SUBMIT SHOP DRAWINGS WHICH ADEQUATELY DEPICT THE REINFORCING BAR SIZES AND PLACEMENT. WRITTEN DESCRIPTION OF REINFORCEMENT WITHOUT ADEQUATE SECTIONS, ELEVATIONS, AND DETAILS IS NOT ACCEPTABLE.
- PROVIDE DOWELS FROM FOUNDATIONS THE SAME SIZE AND NUMBER AS THE VERTICAL WALL OR COLUMN REINFORCING, UNLESS NOTED OTHERWISE. REINFORCING DOWELS MUST BE TIED IN PLACE PRIOR TO POURING FOOTING. "WET-STICKING" IS NOT ALLOWED.
- PLACE REINFORCEMENT AS FOLLOWS, UNLESS NOTED OTHERWISE:
 - CAST-IN-PLACE (NON POST-TENSIONED) CONCRETE REINFORCEMENT COVER
PERMANENTLY EXPOSED TO EARTH:


CAST AGAINST THE EARTH	3" CLEAR
------------------------	----------

EXPOSED TO EARTH OR WEATHER:

FOR BARS LARGER THAN A NO. 5 BAR	2" CLEAR
NO. 5 BARS OR SMALLER	1 ½" CLEAR
COLUMN TIES	1 ¾" CLEAR
 - MASONRY REINFORCING STEEL SHALL BE PLACED IN THE CENTER OF CMU CELLS, UNLESS NOTED OTHERWISE.
- REINFORCEMENT SHALL BE SPLICED ONLY AT LOCATIONS SHOWN OR NOTED IN THE STRUCTURAL DOCUMENTS, EXCEPT REINFORCEMENT MARKED "CONTINUOUS" CAN BE SPLICED AT LOCATIONS DETERMINED BY CONTRACTOR. SPLICES AT OTHER LOCATIONS SHALL BE APPROVED IN WRITING BY THE STRUCTURAL ENGINEER. REINFORCING STEEL SPLICES SHALL BE AS FOLLOWS, UNLESS NOTED OTHERWISE:

MINIMUM LAP SPlice LENGTH (IN.) - 3000 PSI CONCRETE						
No. 3	No. 4	No. 5	No. 6	No. 7	No. 8	
22	29	36	43	63	72	
MINIMUM LAP SPlice LENGTH (IN.) - 1500 PSI NORMAL WEIGHT CMU						
6-in CMU WALL	19	25	39	81	NA	NA
8-in CMU WALL	19	25	31	57	79	113
12-in CMU WALL	19	25	31	53	61	75

RECOMMENDED END HOOKS ANCHORAGE LENGTH (IN.) - 3000 PSI CONCRETE						
No. 3	No. 4	No. 5	No. 6	No. 7	No. 8	
D	2.25	3.00	3.75	4.50	5.25	6.00
A or G	6	8	10	12	14	16



POST INSTALLED ANCHORS

- POST-INSTALLED ANCHORS SHALL ONLY BE USED WHERE SPECIFIED ON THE CONSTRUCTION DOCUMENTS. THE CONTRACTOR SHALL OBTAIN APPROVAL FROM THE ENGINEER-OF-RECORD PRIOR TO INSTALLING POST-INSTALLED ANCHORS IN PLACE OF MISSING OR MISPLACED CAST-IN-PLACE ANCHORS. CARE SHALL BE TAKEN IN PLACING POST-INSTALLED ANCHORS TO AVOID CONFLICTS WITH EXISTING REBAR. HOLES SHALL BE DRILLED AND CLEANED IN ACCORDANCE WITH THE MANUFACTURER'S WRITTEN INSTRUCTIONS. SUBSTITUTION REQUESTS FOR PRODUCTS OTHER THAN THOSE SPECIFIED BELOW SHALL BE SUBMITTED BY THE CONTRACTOR TO THE ENGINEER-OF-RECORD ALONG WITH CALCULATIONS THAT ARE PREPARED & SEALED BY A REGISTERED PROFESSIONAL ENGINEER. THE CALCULATIONS SHALL DEMONSTRATE THAT THE SUBSTITUTED PRODUCT IS CAPABLE OF ACHIEVING THE PERTINENT EQUIVALENT PERFORMANCE VALUES (MINIMUM) OF THE SPECIFIED PRODUCT USING THE APPROPRIATE DESIGN PROCEDURE AND/OR STANDARD(S) AS REQ'D BY THE BUILDING CODE. PROVIDE CONTINUOUS SPECIAL INSPECTION FOR ALL MECHANICAL AND ADHESIVE ANCHORS PER THE APPLICABLE EVALUATION REPORT. CONTACT MANUFACTURER'S REPRESENTATIVE FOR THE INITIAL TRAINING AND INSTALLATION OF ANCHORS AND FOR PRODUCT RELATED QUESTIONS AND AVAILABILITY.

- CONCRETE ANCHORS
 - MECHANICAL ANCHORS SHALL HAVE BEEN TESTED AND QUALIFIED FOR USE IN ACCORDANCE WITH ACI 308.2 AND ICC-ES AC108 FOR CRACKED AND UNCRACKED CONCRETE RECOGNITION. PRE-APPROVED MECHANICAL ANCHORS INCLUDE:
 - SIMPSON STRONG-TIE "TITEN-HD" (ICC-ES ESR-2713)
 - SIMPSON STRONG-TIE "STRONG-BOLT 2" (ICC-ES ESR-3037)
 - ADHESIVE ANCHORS SHALL HAVE BEEN TESTED AND QUALIFIED FOR USE IN ACCORDANCE WITH ACI 308.4 AND ICC-ES AC308 FOR CRACKED AND UNCRACKED CONCRETE RECOGNITION. PRE-APPROVED ADHESIVE ANCHORS INCLUDE:
 - SIMPSON STRONG-TIE "SET-XP" (ICC-ES ESR-2508)
 - SIMPSON STRONG-TIE "AT-XP" (APMO-ES ER-0263)
 - HILTI HIT HY150 INJECTION ADHESIVE
 - EPOXY CERAMIC 6 EPOXY ADHESIVE SUPPLIED BY ITW RAMSET/RED HEAD
 - POWER-FAST EPOXY INJECTION GEL SUPPLIED BY POWERS FASTENING
 - POWDER AND GAS-ACTUATED FASTENERS SHALL HAVE BEEN TESTED AND QUALIFIED FOR USE IN ACCORDANCE WITH ICC-ES AC70. PRE-APPROVED POWDER ACTUATED FASTENERS INCLUDE:
 - SIMPSON STRONG-TIE "POWER-DRIVEN FASTENERS" (ICC-ES ESR-2138)
 - SIMPSON STRONG-TIE "GAS-ACTUATED FASTENERS" (ICC-ES ESR-2811)

MASONRY ANCHORS

- ANCHORAGE TO SOLID-GROUTED CONCRETE MASONRY:

- MECHANICAL ANCHORS SHALL HAVE BEEN TESTED AND QUALIFIED FOR USE IN ACCORDANCE WITH ICC-ES AC101 OR AC106. PRE-APPROVED MECHANICAL ANCHORS INCLUDE:
 - SIMPSON STRONG-TIE "TITEN-HD" (ICC-ES ESR-1056)
 - SIMPSON STRONG-TIE "STRONG-BOLT 2" (IAMPO-ES ER-0240)
 - SIMPSON STRONG-TIE "WEDGE-ALL" (ICC-ES ESR-1396)
- ADHESIVE ANCHORS SHALL HAVE BEEN TESTED AND QUALIFIED FOR USE IN ACCORDANCE WITH ICC-ES AC58. PRE-APPROVED MECHANICAL ANCHORS INCLUDE:
 - SIMPSON STRONG-TIE "AT-XP" (IAMPO-ES ER-0281)
 - SIMPSON STRONG-TIE "SET-XP" (IAMPO-ES ER-0265)
 - HILTI HIT HY150 INJECTION ADHESIVE
 - EPOXY CERAMIC 6 EPOXY ADHESIVE SUPPLIED BY ITW RAMSET/RED HEAD
 - POWER-FAST EPOXY INJECTION GEL SUPPLIED BY POWERS FASTENING

ANCHORAGE TO HOLLOW CONCRETE MASONRY:

- ADHESIVE ANCHORS WITH SCREEN TUBES SHALL BE TESTED AND QUALIFIED IN ACCORDANCE WITH ICC-ES AC58 OR AC60, AS APPROPRIATE. THE APPROPRIATE SCREEN TUBE SHALL BE USED AS RECOMMENDED BY THE ADHESIVE MANUFACTURER. PRE-APPROVED ADHESIVE ANCHORS WITH SCREEN TUBES INCLUDE:
 - SIMPSON STRONG-TIE "SET" (ICC-ES ESR-1772)
 - SIMPSON STRONG-TIE "AT" (ICC-ES ESR-1958)
 - HILTI HIT HY150 INJECTION ADHESIVE
 - EPOXY CERAMIC 6 EPOXY ADHESIVE SUPPLIED BY ITW RAMSET/RED HEAD
 - POWER-FAST EPOXY INJECTION GEL SUPPLIED BY POWERS FASTENING

- ALL DRILLED & EPOXIED ½" THREADED RODS SHALL MAINTAIN A MINIMUM EDGE DISTANCE OF 1 ½" AND CLEAR SPACING OF 4" O.C. (MAX.)

CAST-IN-PLACE CONCRETE

- ALL CONCRETE HAS BEEN DESIGNED IN ACCORDANCE WITH ACI 318 AND SHALL BE CONSTRUCTED IN ACCORDANCE WITH ACI 301.
- UNLESS NOTED OTHERWISE, ALL CONCRETE SHALL HAVE A 28 DAY COMPRESSIVE STRENGTH OF 3000 PSI.
- REFER TO ARCHITECTURAL DRAWINGS FOR MOLDS, GROVES, ORNAMENTS, CLIPS OR GROUNDS REQUIRED TO BE ENCASED IN CONCRETE AND FOR LOCATION OF FLOOR FINISHES AND SLAB DEPRESSIONS.
- CONSTRUCTION JOINT LOCATIONS SHALL BE APPROVED BY THE STRUCTURAL ENGINEER. NO HORIZONTAL CONSTRUCTION JOINTS ARE PERMITTED EXCEPT THOSE SHOWN ON THE STRUCTURAL DRAWINGS.
- DEFECTIVE AREAS IN CONCRETE INCLUDING, BUT NOT LIMITED TO, HONEY-COMBING, SPALLS, AND CRACKS WITH WIDTHS EXCEEDING 0.01 INCH SHALL BE REPAIRED. EXTENT OF DEFECTIVE AREA TO BE DETERMINED BY THE STRUCTURAL ENGINEER.

WOOD

- ALL HEADERS, BEAMS, POSTS, ETC. HAVE BEEN DESIGNED TO SUPPORT ROOF FRAMING MEMBERS AS SHOWN ON ROOF FRAMING PLAN. IT IS THE RESPONSIBILITY OF THE TRUSS MFG. TO NOTIFY E.O.R. OF ANY DISCREPANCY & PROVIDE FINAL TRUSS LAYOUT TO E.O.R. FOR STRUCTURAL PLAN REVISION IF LAYOUT VARIES FROM THAT SHOWN ON THIS PLAN SET.
 - ALL DECK JOISTS HEREIN SHOWN AS 16" O.C. OR GREATER ARE INTENDED FOR 2 X 6 OR 5/4 X 6 WOOD DECKING. IT IS THE CONTRACTORS RESPONSIBILITY, IF USING COMPOSITE DECKING TO INSTALL DECK JOISTS @ 12" O.C. OR AS REQUIRED BY MANUFACTURERS SPECIFICATIONS.
- STRUCTURAL GLUED LAMINATED TIMBER SHALL BE PRODUCED IN ACCORDANCE WITH THE AMERICAN INSTITUTE OF TIMBER CONSTRUCTION (AITC). MINIMUM ALLOWABLE BENDING STRESS SHALL BE 2,400 PSI (DRY CONDITIONS).
- PROVIDE DRESSED SEASONED LUMBER, S4S, WITH A MAXIMUM MOISTURE CONTENT OF 19% AT TIME OF DRESSING AS LISTED BELOW.
 - INTERIOR AND EXTERIOR LOAD-BEARING WALLS: SPRUCE PINE FUR (SPF) U.N.O.
 - LINTELS, FLOOR JOISTS AND BEAMS: SOUTHERN PINE (S.P.), NO. 2 GRADE.
- WOOD IN CONTACT WITH CONCRETE OR MASONRY SHALL BE FOUNDATION GRADE PRESSURE-TREATED. USE GALVANIZED NAILS IN PRESSURE-TREATED WOOD. THE PROTECTIVE COATING ON LIGHT GAUGE STEEL CONNECTIONS IN CONTACT w/ PRESSURE-TREATED WOOD SHALL BE IN ACCORDANCE WITH THE CONNECTOR MANUFACTURERS RECOMMENDATIONS.
- ENGINEERED LUMBER PRODUCTS
 - PARALLEL STRAND LUMBER (PSL) SHALL HAVE THE FOLLOWING MINIMUM ALLOWABLE STRESSES AND PROPERTIES:

ALLOWABLE BENDING STRESS	F _b = 2900 PSI
COMPRESSION PERPENDICULAR TO GRAIN	F _{c⊥} = 750 PSI
COMPRESSION PARALLEL TO GRAIN	F _c = 2900 PSI
HORIZONTAL SHEAR	F _v = 290 PSI
MODULUS OF ELASTICITY	E = 2,000,000 PSI
 - LAMINATED VENEER LUMBER (LVL) SHALL HAVE THE FOLLOWING MINIMUM ALLOWABLE STRESSES AND PROPERTIES:

ALLOWABLE BENDING STRESS	F _b = 2600 PSI
COMPRESSION PERPENDICULAR TO GRAIN	F _{c⊥} = 750 PSI
COMPRESSION PARALLEL TO GRAIN	F _c = 2510 PSI
HORIZONTAL SHEAR	F _v = 265 PSI
MODULUS OF ELASTICITY	E = 2,000,000 PSI
 - LAMINATED STRAND LUMBER (LSL) SHALL HAVE THE FOLLOWING MINIMUM ALLOWABLE STRESSES AND PROPERTIES:

ALLOWABLE BENDING STRESS	F _b = 1700 PSI
COMPRESSION PERPENDICULAR TO GRAIN	F _{c⊥} = 710 PSI
COMPRESSION PARALLEL TO GRAIN	F _c = 1835 PSI
HORIZONTAL SHEAR	F _v = 425 PSI
MODULUS OF ELASTICITY	E = 1,300,000 PSI
 - GLULAM BEAMS (GLU) SHALL HAVE THE FOLLOWING MINIMUM ALLOWABLE STRESSES AND PROPERTIES:

ALLOWABLE BENDING STRESS	F _b = 3000 PSI
COMPRESSION PERPENDICULAR TO GRAIN	F _{c⊥} = 805 PSI
TENSION PARALLEL TO GRAIN	F _t = 1350 PSI
HORIZONTAL SHEAR	F _v = 300 PSI
MODULUS OF ELASTICITY	E = 2,100,000 PSI
- PRESERVED GLULAM BEAMS (GLU) SHALL HAVE THE FOLLOWING MINIMUM ALLOWABLE STRESSES AND PROPERTIES:

ALLOWABLE BENDING STRESS	F _b = 2400 PSI
COMPRESSION PERPENDICULAR TO GRAIN	F _{c⊥} = 740 PSI
HORIZONTAL SHEAR	F _v = 300 PSI
MODULUS OF ELASTICITY	E = 1,800,000 PS
- STRUCTURAL PANELS
 - FLOOR PANELS SHALL BE CONSTRUCTED WITH TONGUE AND GROOVE APA RATED 3/4" PLYWOOD. FLOOR PANELS SHALL BE GLUED AND NAILED w/ 8d RING SHANK NAILS @4" O.C. AT PANEL EDGES AND AT 6" O.C. IN THE FIELD.
 - WALL PANELS SHALL BE CONSTRUCTED WITH APA RATED SHEATHING. SHEATHING SHALL BE ATTACHED WITH 8d COMMON NAILS @3" O.C. AT PANEL EDGES AND 6" O.C. IN THE FIELD. ALL PANEL EDGES SHALL BE BLOCKED.
 - ROOF PANELS SHALL BE CONSTRUCTED WITH APA RATED SHEATHING. SHEATHING SHALL BE ATTACHED WITH 8d RING SHANK NAILS @ 3" O.C. AT PANEL EDGES AND AT 6" O.C. IN THE FIELD. ALL PANEL EDGES SHALL BE BLOCKED OR ATTACHED WITH SIMPSON PSCA PANEL SHEATHING CLIPS.
 - NAIL HEADS SHALL NOT PENETRATE THE OUTER SURFACE OF SHEATHING.
- FABRICATED WOOD TRUSSES
 - DESIGN OF WOOD TRUSSES SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR. SUBMIT SHOP DRAWINGS, DESIGN LOAD DATA, AND SUPPORT REACTIONS SEALED BY AN ENGINEER LICENSED IN THE PROJECT STATE. REVIEW OF SHOP DRAWINGS SHALL BE FOR CONFORMANCE WITH THE CONTRACT DOCUMENTS WITH REGARD TO TRUSS CONFIGURATION, AND THE CONTRACTOR'S INTERPRETATION OF DESIGN LOADS AND DETAILS. SUCH REVIEW SHALL NOT RELIEVE THE CONTRACTOR OF THE FULL RESPONSIBILITY FOR THE DESIGN OF THE TRUSSES OR TRUSS CONNECTIONS NOT SPECIFICALLY DETAILED IN THE CONTRACT DOCUMENTS.
 - ERECTION AND BRACING OF PREFABRICATED WOOD TRUSSES SHALL BE IN CONFORMANCE WITH THE RECOMMENDATIONS OF THE TRUSS MANUFACTURER AND THE TRUSS PLATE INSTITUTE'S "BRACING WOOD TRUSSES: COMMENTARY AND RECOMMENDATIONS".
 - SECURE EACH COMMON ROOF TRUSS/RAFTER TO TOP PLATE WITH SIMPSON H-10 OR H-7 HURRICANE CLIP AT ALL BEARING POINTS. USE SIMPSON H-7 AT GIRDER TRUSSES. PROVIDE A MINIMUM OF TWO STUDS UNDER GIRDER TRUSS END BEARING.
 - TRUSSES ON SITE PRIOR TO INSTALLATION SHALL BE STORED IN A VERTICAL POSITION WITH SUPPORT POINTS PROVIDED AT FINAL BEARING POINTS AND BRACED TO AVOID TIPPING.
 - INSTALLATION OF ALL TRUSSES SHALL BE DONE USING A SPREADER BAR WITH A THREE POINT VERTICAL PICK AND CARE IS TO BE USED IN LIFTING TO MINIMIZE HORIZONTAL BENDING.
 - IMPROPER HANDLING OF THE TRUSSES AS NOTED ABOVE AND IN THE SPECIFICATIONS SHALL MEAN REMOVAL OF THE TRUSSES FROM THE JOB SITE.
 - TRUSS TO TRUSS CONNECTIONS SHALL BE VERIFIED BY THE TRUSS DESIGNER.
 - EXPOSED TRUSSES SHALL BE DELIVERED TO THE JOB SITE UNBLEMISHED AND SUITABLE FOR FIELD PAINTING.
 - CONTRACTOR TO REFER TO "STANDARD FOR HURRICANE RESISTANT CONSTRUCTION SSTD 10-99 FOR FRAMING REQUIREMENTS OF WOOD FRAMED WALL SYSTEMS, TABLE 305C AND FIGURE 308D.
 - ALL FLOOR TRUSS DESIGN LOADS SHALL BE PER TRUSS MANUFACTURER. THE LOADS REFERENCED WITHIN THE FOLLOWING "STRUCTURAL LOADS" SECTION REPRESENTS THE LOADS USED FOR THE DESIGN OF STRUCTURAL MEMBERS SUPPORTING FLOOR AND ROOF TRUSSES.
- CONNECTIONS
 - CONNECTIONS FOR STRUCTURAL TIMBER SHALL BE GALVANIZED STRONG TIE CONNECTORS BY THE SIMPSON COMPANY OR APPROVED EQUAL. CONNECTORS SHALL FOLLOW MANUF. CORROSION PROTECTION RECOMMENDATIONS.
 - THE NUMBER OF FASTENERS PER CONNECTION SHALL BE THE MAX. ALLOWED FOR THAT PARTICULAR FASTENER.

STRUCTURAL LOADS:

SUPERIMPOSED DEAD LOADS (RESIDENTIAL CONSTRUCTION):

FLOOR	20 PSF
PORCH	10 PSF
ROOF	15 PSF

SUPERIMPOSED LIVE LOADS (RESIDENTIAL CONSTRUCTION):

ATTICS w/ STORAGE	20 PSF
ATTICS w/o STORAGE	10 PSF
HABITABLE ATTICS & BEDROOMS	40 PSF
ALL OTHER ROOMS	40 PSF
DECKS	60 PSF
FLOOR	40 PSF
ROOF	20 PSF

WIND LOADS AS SPECIFIED BY ASCE 7-16 (ASD):



ULTIMATE WIND SPEED	140 MPH
NOMINAL WIND SPEED	108 MPH
STRUCTURAL CATEGORY	II
EXPOSURE CATEGORY	B
INTERNAL PRESSURE COEFFICIENT	0.18 ±
IMPACT GLASS WINDOWS & DOORS	N/A

MAIN WIND FRAME RESISTING SYSTEM (MWFRS)		
AREA	INTERIOR ZONE	END ZONE
WALLS	16.67 PSF	20.84 PSF
ROOF	± 14.83 PSF	± 18.54 PSF

COMPONENTS AND CLADDING ROOF PRESSURES (PSF)		
ZONE	+ Gcpi	- Gcpi
ROOF (ZONE 1)	13.81	-26.36
ROOF (ZONE 2)	13.81	-42.05
ROOF (ZONE 3)	13.81	-59.31

COMPONENTS AND CLADDING WALL PRESSURES (PSF)						
	0 SF - 10 SF	10 SF - 30 SF	30 SF - 60 SF	60 SF - 100 SF		
ZONE	+ Gcpi	- Gcpi	+ Gcpi	- Gcpi	+ Gcpi	- Gcpi
4	18.51	-20.08	18.51	-20.08	17.19	-18.76
5	18.51	-24.79	18.51	-24.79	17.19	-22.15

NOTE: ALL PRESSURES SHOWN ARE BASED UPON ASD DESIGN, WITH A LOAD FACTOR OF 0.6.

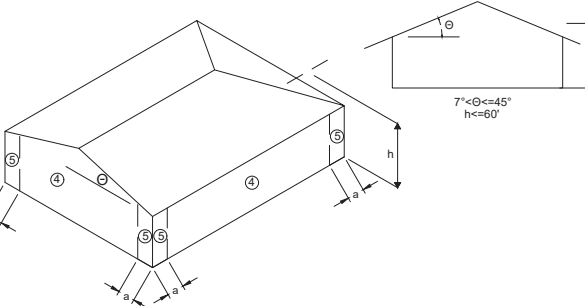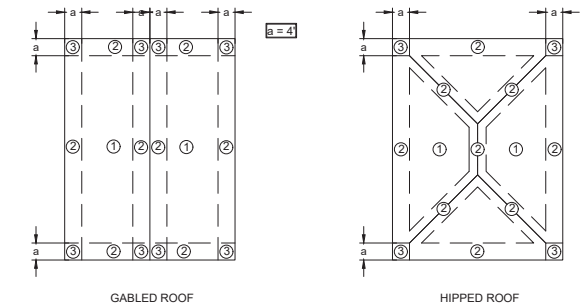

CERTIFICATION

THE STRUCTURE SHOWN ON THESE PLANS IS DESIGNED IN ACCORDANCE WITH FLORIDA BUILDING CODE 7TH EDITION (2020).

ABBREVIATIONS

CONC. = CONCRETE	E.O.R. = ENGINEER OF RECORD
WWM = WELDED WIRE MESH	N.T.S. = NOT TO SCALE
CONT. = CONTINUOUS	BTM. = BOTTOM
CMU = CONCRETE MASONRY UNIT	C.I.P. = CAST IN PLACE
P.T. = PRESSURE TREATED	S.S. = STAINLESS STEEL
N.T.S. = NOT TO SCALE	TYP. = TYPICAL
BTW = BETWEEN	REQ'D = REQUIRED
SIM = SIMILAR	U.N.O. = UNLESS NOTED OTHERWISE
LOC = LOCATION	L.B.W. = LOAD BEARING WALL
HCA = HEADED CONCRETE ANCHOR	MFG. = MANUFACTURER
CONT. = CONTINUOUS	

SHEARWALL/SHEATHING NAIL SCHEDULE (U.N.O.)		
WALLS	8d	3" O.C. EDGE 6" O.C. FIELD
ROOF	8d "RING SHANK"	3" O.C. EDGE 6" O.C. FIELD
TONGUE & GROOVE SHEATHING, IF APPLICABLE (U.N.O.)		
WALLS	(2) 3" #9 DECK SCREWS	EACH STUD CONN.
ROOF	(2) 3" #9 DECK SCREWS	EACH TRUSS/RAFTER CONN.

2 BEDROOM / 2 BATH WIDE SLAB

SCALE

BY	ITEM	DATE

REVISIONS

DRAWN BY	_____
APPROVED BY	_____
CHECKED BY	_____
DATE	_____
TITLE	_____

STRUCTURAL GENERAL NOTES

PROJECT NO.

S3

SHEET NO.

E

D

C

B